# M-8110 3

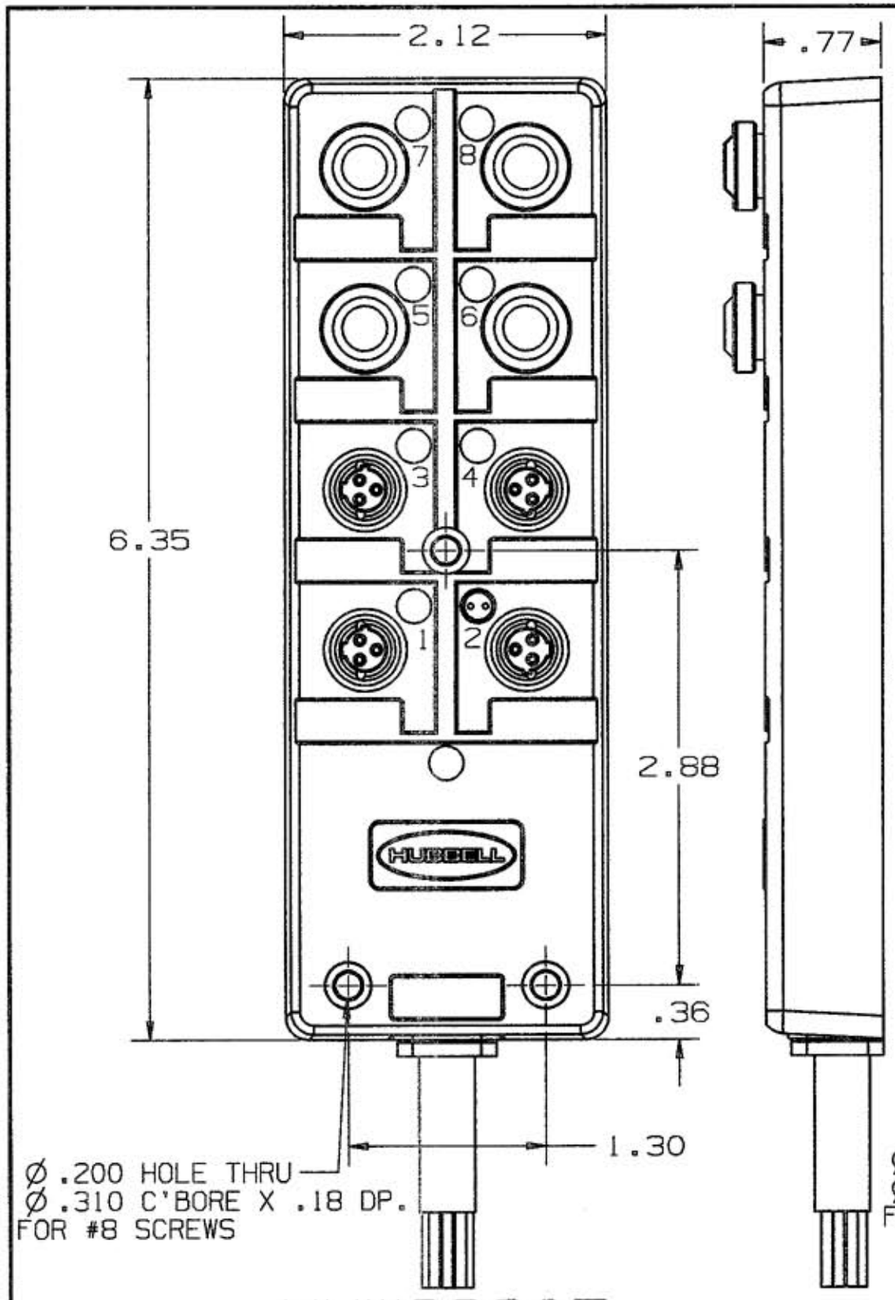


MMW38205

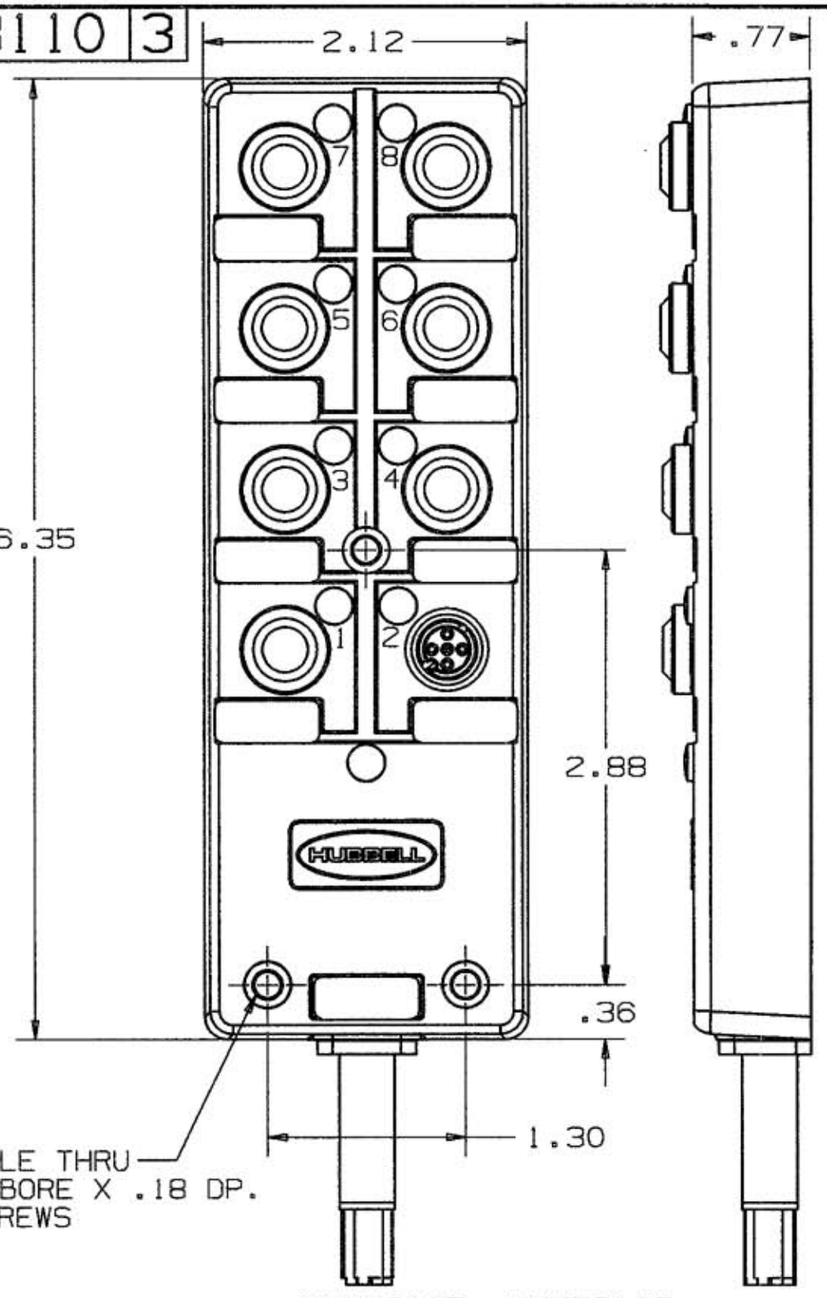


MMW48105, MMW58105
MMW48505, MMW58505

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. 3A PER OUTPUT PORT, 7A TOTAL INPUT.
2. ALL UNITS PARALLEL WIRED.
3. HOUSING COLOR: BLACK
4. CORD LENGTH: 5M (197IN)

| CAT. NO. | RATING | LED'S | OUTPUT PORTS | INPUT PORT |
|---|---|---|---|---|
| MMW38205 | 300VAC MAX. | NO | 3W DUAL KEY RECEPT. 1/2-20 UNF INTERNAL THD | #18AWG CABLE, UL STYLE 2661 |
| MMW48105 (PNP CIRCUIT) MMW48505 (NPN CIRCUIT) | 10-30VDC | YES | 3W SINGLE KEYWAY RECEPT M12 X 1 6H INTERNAL THD | #18AWG CABLE, UL STYLE 2661 |
| MMW58105 (PNP CIRCUIT) MMW58505 (NPN CIRCUIT) | 10-30VDC | YES | 4W SINGLE KEYWAY RECEPT M12 X 1 6H INTERNAL THD | #18AWG CABLE, UL STYLE 2661 |

CODE 74545

LIST OF PARTS

| DESCRIPTION | MATERIAL | FINISH |
|---|---|---|
| HOUSING | RIGID PVC | |
| PORT CONNECTIONS | BRASS | NICKEL PLATED |
| CORD | PVC JACKET | |
| OUTPORT INSULATOR | NYLON | |

DIMENSION SHEET FOR CAT. NO. SEE TABULATION

REPAIRABLE ☐ NON-REPAIRABLE ☒

| SYM | REVISIONS | APP | DATE |
|---|---|---|---|
| 3 | ADDED CAT. No. MMW48505, MMW58505 PER DCN 8603 | CZH | TMS 02-21-00 |
| 2 | REMOVED "TWELVE CONDUCTOR" FROM "INPUT PORT" COLUMN PER DCN 6472-5 | CZH | CZH 02-21-00 |
| 1 | NEW RELEASE PER DCN 6472 | CZH | RTK 7/14/99 |

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE SIGNALPLEX™ PORT
MMW38205, MMW48105, MMW58105, MMW48505, MMW58505

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

| | |
|---|---|
| DR. BY RTK | APP. BY CZH |
| TR. BY | SCALE 1:1 |
| CHK'D BY CZH | DATE 7/14/99 |

B M-8110 3