


M-9055 7

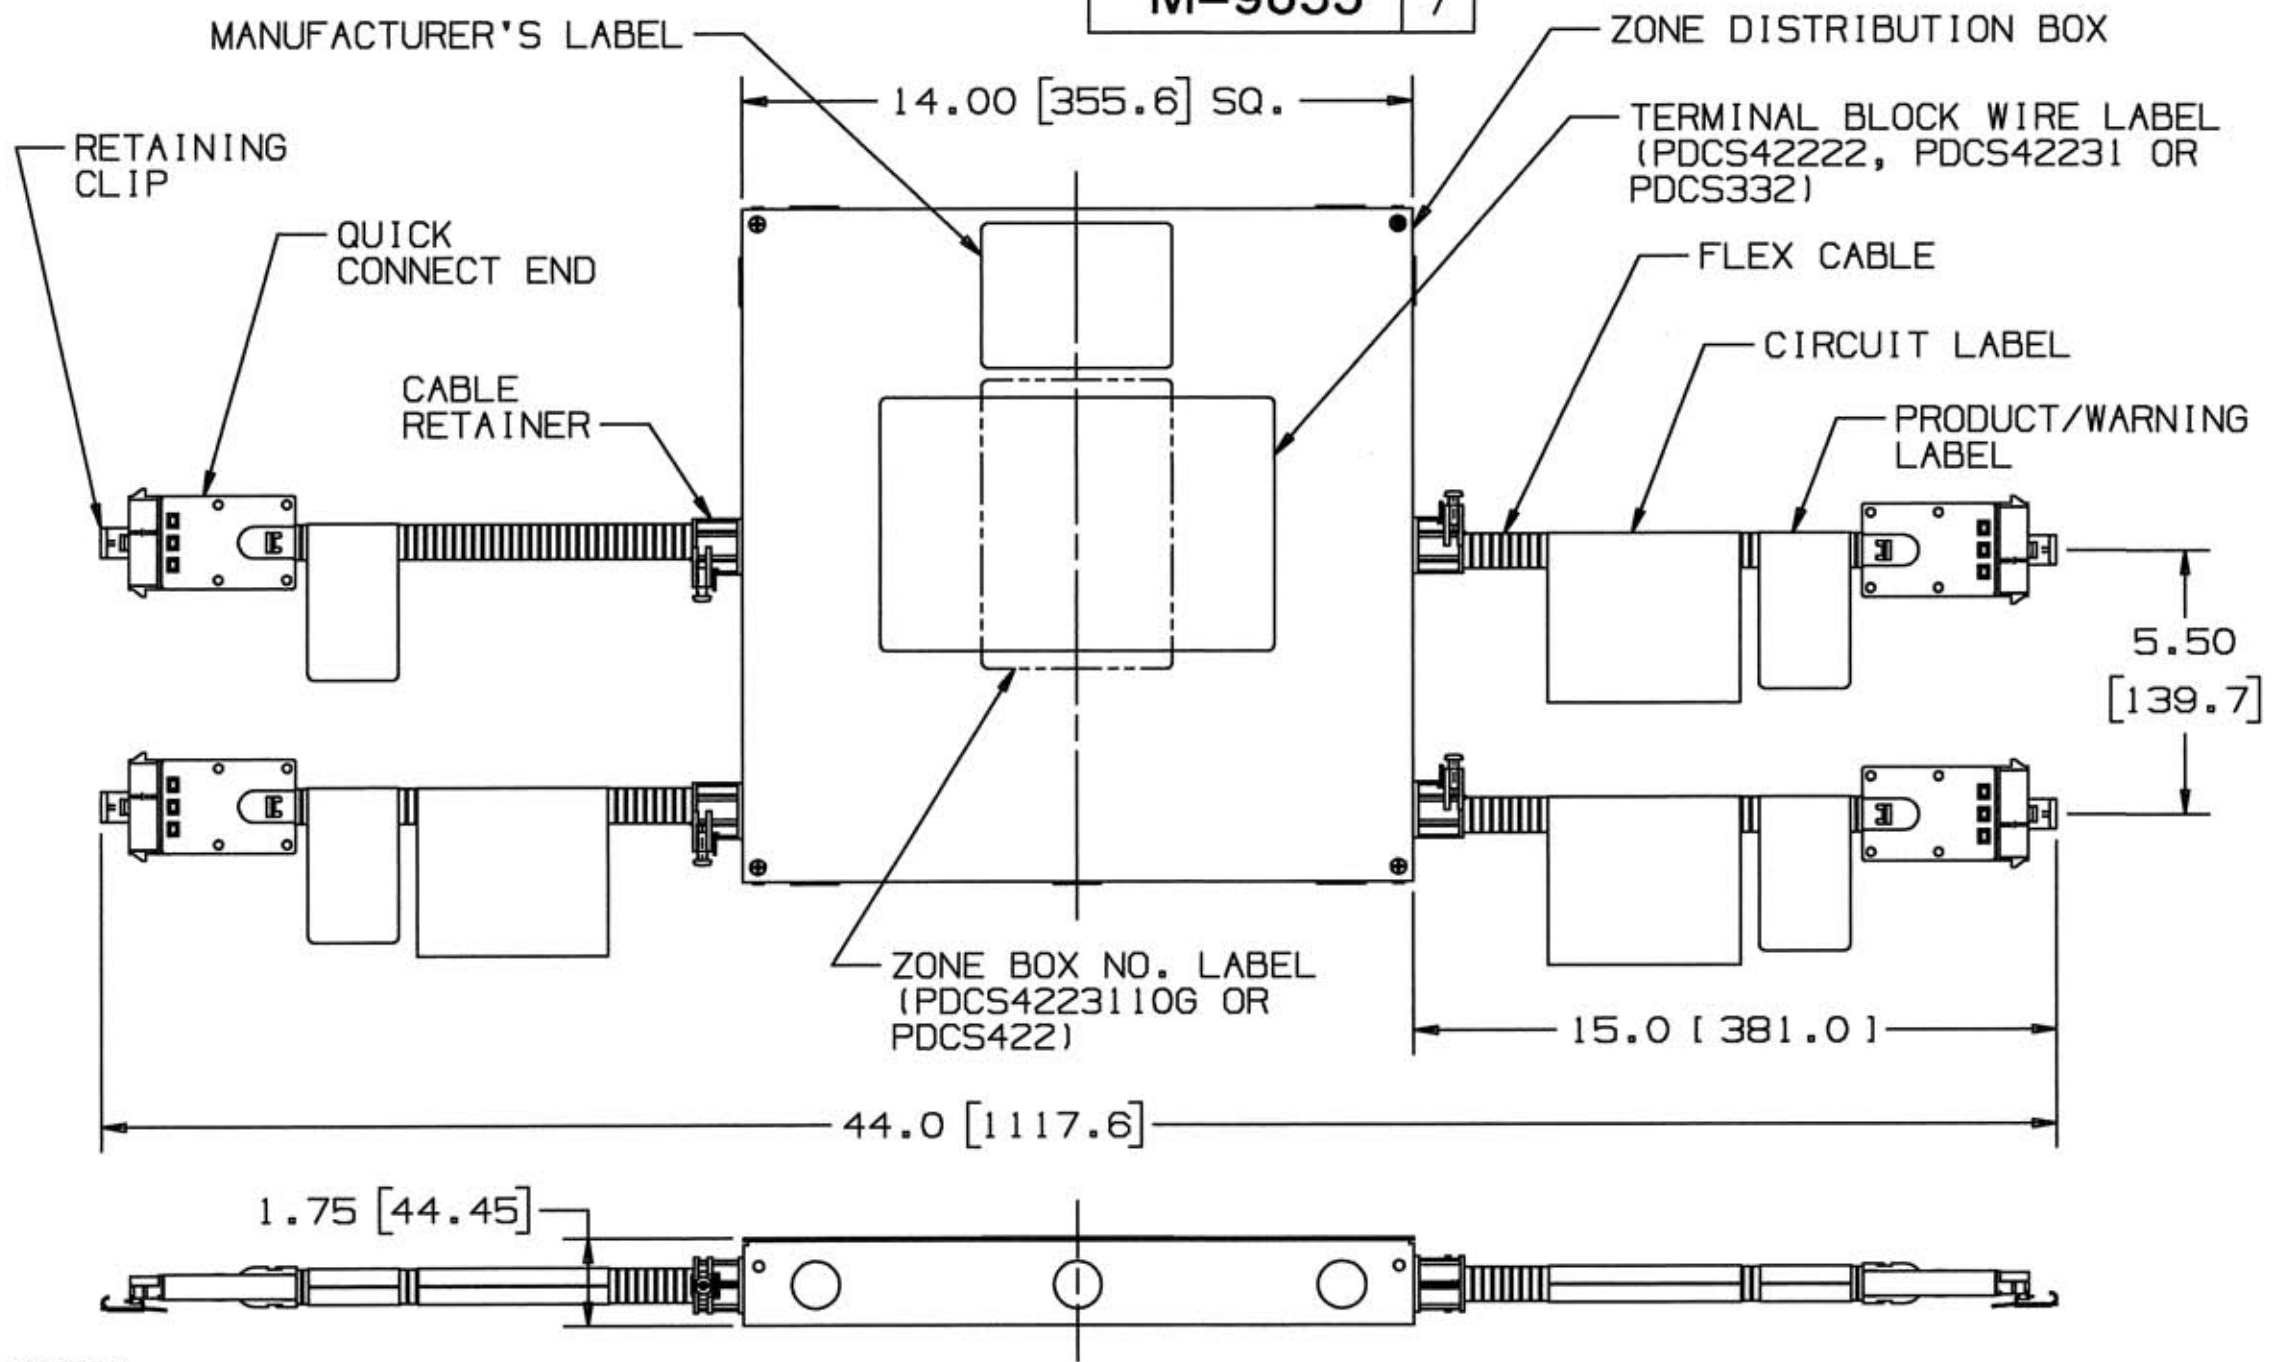

| LIST OF PARTS          |            |                |
|------------------------|------------|----------------|
| DESCRIPTION            | MATERIAL   | FINISH         |
| ZONE DIST. BOX         | STEEL      | PRE-GALV.      |
| CABLE RETAINER         | CAST ALUM. | ZINC PL.       |
| FLEX CABLE             | STEEL      | ZINC PL.       |
| QUICK CONN. END        |            | ZINC PL./BLACK |
| RETAINING CLIP         | STEEL      | ZINC PL.       |
| WARNING LABEL          |            | ORANGE         |
| WARNING LABEL          |            | WHITE          |
| CIRCUIT LABEL (SMALL)  |            | WHITE          |
| CIRCUIT LABEL (LARGE)  |            | WHITE          |
| MANUF. LABEL           |            | WHITE          |
| ZONE BOX NO. LABEL     |            | WHITE          |
| TERM. BLOCK WIRE LABEL |            | WHITE          |

| NO. | DESCRIPTION   | BY  | DATE     |
|-----|---|-----|----------|
| 7   | TABLE, REMOVED CAT. PDCS442 DCN13366 GPK  | JPP | 9/20/08  |
| 6   | REVISED NOTES 2 & 7; ADDED NOTE 8; ADDED "TERMINAL BLOCK WIRE LABEL; ADDED CAT. NO'S TO "ZONE BOX NO. LABEL" CALL-OUT PER DCN 13237 RCM | CZH | 8/24/08  |
| 5   | REVISED NOTE 3 PER DCN 13264 RCM  | JPP | 7/27/08  |
| 4   | ADDED PDCS4223110G PER DCN 12872 RCM  | JPP | 2/2/08   |
| 3   | REMOVED NOTE 5 PER DCN 12048 RCM  | JPP | 11/30/04 |
| 2   | ADDED PDCS442 PER DCN 11644 T.J.V.  | TJV | 4-2-04   |
| 1   | INITIAL RELEASE #10812  | JVD | 3-18-03  |
| SYM | REVISIONS   | APP | DATE     |

- NOTES:
- DIM'S. INCHES [MM].
  - PRODUCT MEETS UL & CSA CONSTRUCTION, PERFORMANCE, AND MARKING REQUIREMENTS.
  - EXTRA FLEX METAL CONDUIT, TYPE FMC PER NEC 348.
  - QUICK CONNECT ENDS PER CATALOG NO.
  - REMOVED THIS NOTE.
  - ZONE DISTRIBUTION BOXES ARE HARD WIRED. THE TERMINATION METHOD OF THE GROUNDING CONDUCTOR DETERMINES WHICH CIRCUITS ARE "ISOLATED GROUND CIRCUITS".
  - THE CIRCUIT CAPACITY PER 4/2/2 ZONE DISTRIBUTION BOX MAY BE INCREASED UP TO 12 CIRCUITS IF NECESSARY, WHEN USED WITH 120/240VAC DELTA, OPEN DELTA & SINGLE PHASE POWER SOURCES & MAY BE INCREASED UP TO 16 CIRCUITS WHEN USED WITH 120/208VAC WYE POWER SOURCE.
  - THE CIRCUIT CAPACITY PER 3/3/2 ZONE DISTRIBUTION BOX MAY BE INCREASED UP TO 12 CIRCUITS, IF NECESSARY.

| CATALOG NO.        | CIRCUIT/CAPACITY        |
|--------------------|-------------------------|
| PDCS42222          | 4/2/2 SYSTEM 2+2        |
| PDCS42231          | 4/2/2 SYSTEM 3+1        |
| PDCS332            | 3/3/2 SYSTEM            |
| <del>PDCS442</del> | <del>4/4/2 SYSTEM</del> |
| PDCS4223110G       | 4/2/2 SYSTEM 3+1, 10AWG |

| REPAIRABLE <input type="checkbox"/> |  |  | NON-REPAIRABLE <input type="checkbox"/> |  |  |
|-------------------------------------|--|--|---|--|--|
| B                                   |  |  | M-9055                                  |  |  |

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

| TITLE  |   |
|--|---|
| ZONE DISTRIBUTION BOX<br>3/3/2, 4/2/2 & 4/4/2 SYSTEM |   |
| TOLERANCES UNLESS OTHERWISE SPECIFIED                | WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT |
| FRACTIONS ± 1/84                                     | DR. BY PAC APP. BY JVD                                    |
| DECIMALS ± .005                                      | TR. BY SCALE N/A  |
| ANGLES ± 2°  | CHK'D BY DATE 3-18-03                                     |

DIMENSION SHEET FOR CAT. NO. SEE CHART REPAIRABLE  NON-REPAIRABLE  B M-9055 7