M-9777 | 1

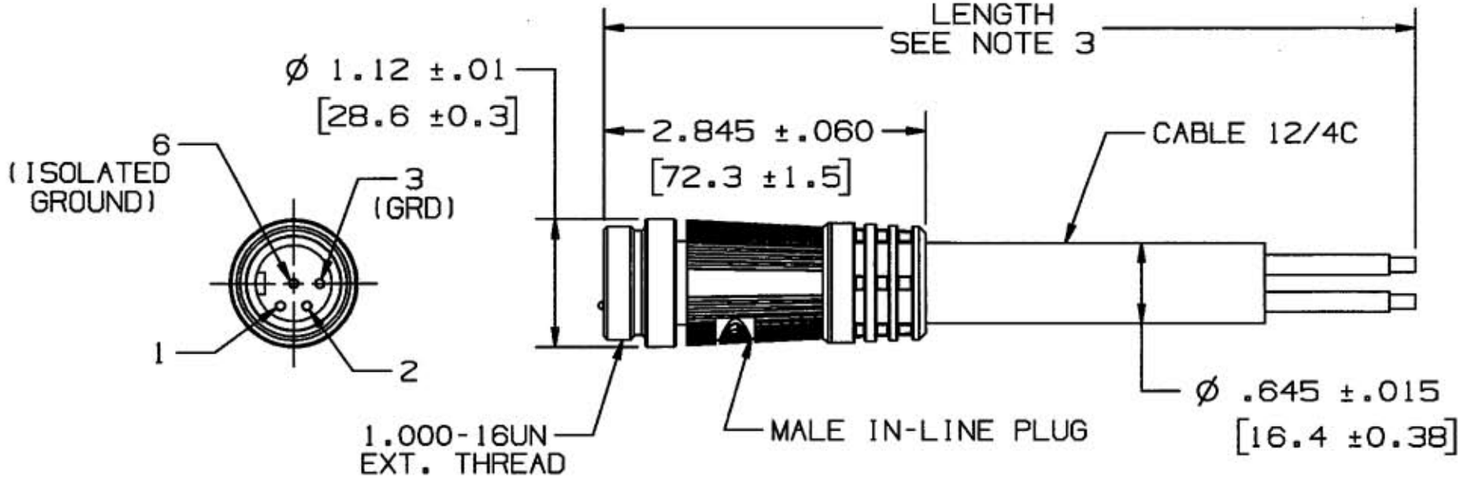

NOTES: UNLESS OTHERWISE SPECIFIED

1. UL LISTED (PRODUCT CATEGORY CYJV). NOT FOR CURRENT INTERRUPT, RATED 30A, 600V.
   CABLE - LISTED (QPOR) POWER & CONTROL TRAY CABLE, 600V TYPE TC-ER.
2. THESE DEVICES SHALL CONFORM TO LINKOSITY SPECIFICATIONS -0015, -0021.
3. THE "XXX" IN CATALOG NUMBER DENOTES
   LENGTH OF PLUG ASSEMBLY IN FEET. PM2304PB005
   IS 5 FEET LONG. TOLERANCE ±3.0" UP TO 5';
   ± 8.0" FROM 5' TO 25'; ±12.0" GREATER THAN 25'.
4. FIGURE SHOWN IS MALE IN-LINE CORDSET.
5. DIMENSIONS ARE IN INCHES [mm].
6. LINKOSITY™ IS A TRADEMARK OF LOCKHEED MARTIN.

CATALOG NUMBER SEE NOTE 3	NUMBER OF POLES	POSITION NUMBER	COLOR	CONDUCTOR MARKING
PM2304PBXXX	4	1	BLACK	P1
		2	WHITE	P2
		3	GREEN/YELLOW	P3
		6	GREEN/YELLOW	P4

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
COUPLING NUT	BRASS	NICKEL PLATE
OVERMOLD	POLYURETHANE	GRAY
CABLE	10 AWG PVC	GRAY
PIN CONTACT	BRASS	GOLD OVER PD/NI
INSULATOR,PIN	NYLON	WHITE

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
1	5/04/05 RELEASED PER DCN#12330 CAC CAC	CAC	5/04/05

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 20A SNIG STR. MALE SINGLE ENDED CABLE LINKOSITY™ 12 AWG, TC-ER CABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY CAC	APP. BY CAC
TR. BY	SCALE NONE
CHK'D BY CAC	DATE 5/03/05

B

M-9777

1