M-10088 | 2

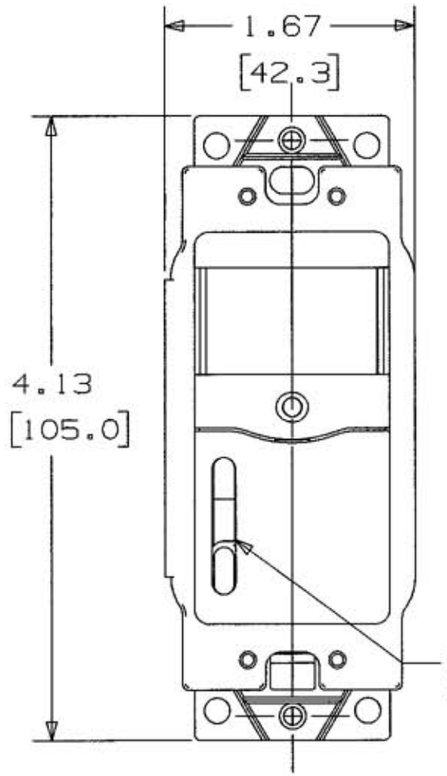

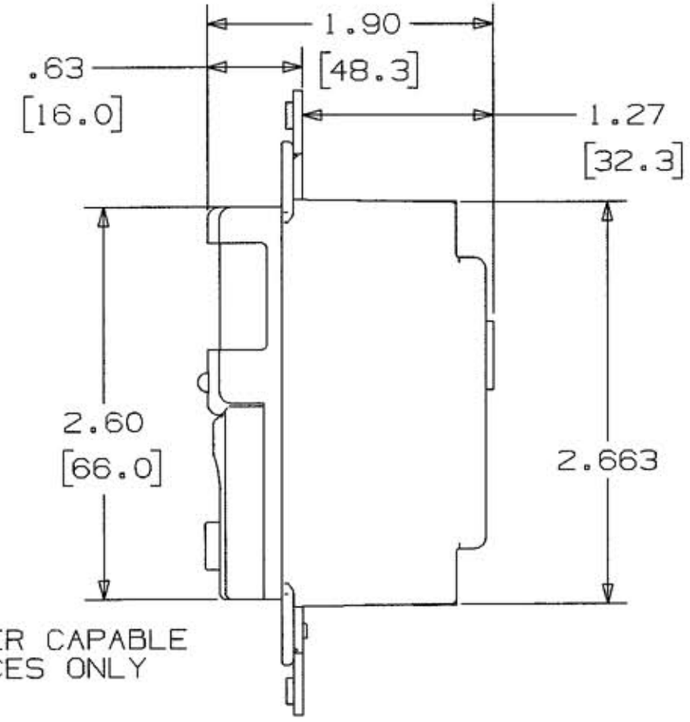

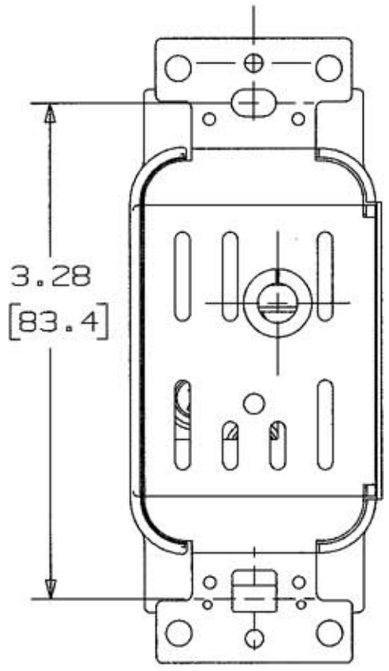

*DIMENSIONS ARE IN INCHES [MM]

NOTES:

1. RATED: 25W MIN-500W MAX 120 VAC
2. FOR USE WITH INCANDESCENT LIGHTS ONLY.
3. LIGHTS DIM 50% 30 SECONDS PRIOR TO GOIN OFF.
4. ADJUSTABLE TIME DELAY: 30 SECONDS TO 30 MINUTES
5. COVERAGE: 600 SQ. FT., 150 DEGREES
6. INDOOR USE ONLY
7. UL & cUL LISTED

CATALOG NO.		COLOR	DIMMING CAPABLE	CALIFORNIA TITLE 24 COMPLIANT
RMS120AL	RMS120ILAL	ALMOND	YES	YES
RMS120I	RMS120ILI	IVORY		
RMS120LA	RMS120ILLA	LIGHT ALMOND		
RMS120W	RMS120ILW	WHITE		
RMS121AL	RMS121ILAL	ALMOND	YES	NO AUTO-ON
RMS121I	RMS121ILI	IVORY		
RMS121LA	RMS121ILLA	LIGHT ALMOND		
RMS121W	RMS121ILW	WHITE		
RMS100AL	RMS100ILAL	ALMOND	NO	YES
RMS100I	RMS100ILI	IVORY		
RMS100LA	RMS100ILLA	LIGHT ALMOND		
RMS100W	RMS100ILW	WHITE		
RMS101AL	RMS101ILAL	ALMOND	NO	NO AUTO-ON
RMS101I	RMS101ILI	IVORY		
RMS101LA	RMS101ILLA	LIGHT ALMOND		
RMS101W	RMS101ILW	WHITE		

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
STRAP/HEAT SINK	ALUMINUM	
COVER	PLASTIC	
LENSE	PLASTIC	
PRESS BUTTON	PLASTIC	

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
2	ADDED CAT NO WITH "IL" PER DCN 14433	ROK	01/16/08
1	RELEASED PER DCN 13759	ROK	02/01/06

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

VACANCY & OCCUPANCY SENSOR

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY AMZ	APP. BY ROK
TR. BY	SCALE NONE
CHK'D BY ROK	DATE 03/31/06

B M-10088 2