


M-12337 1

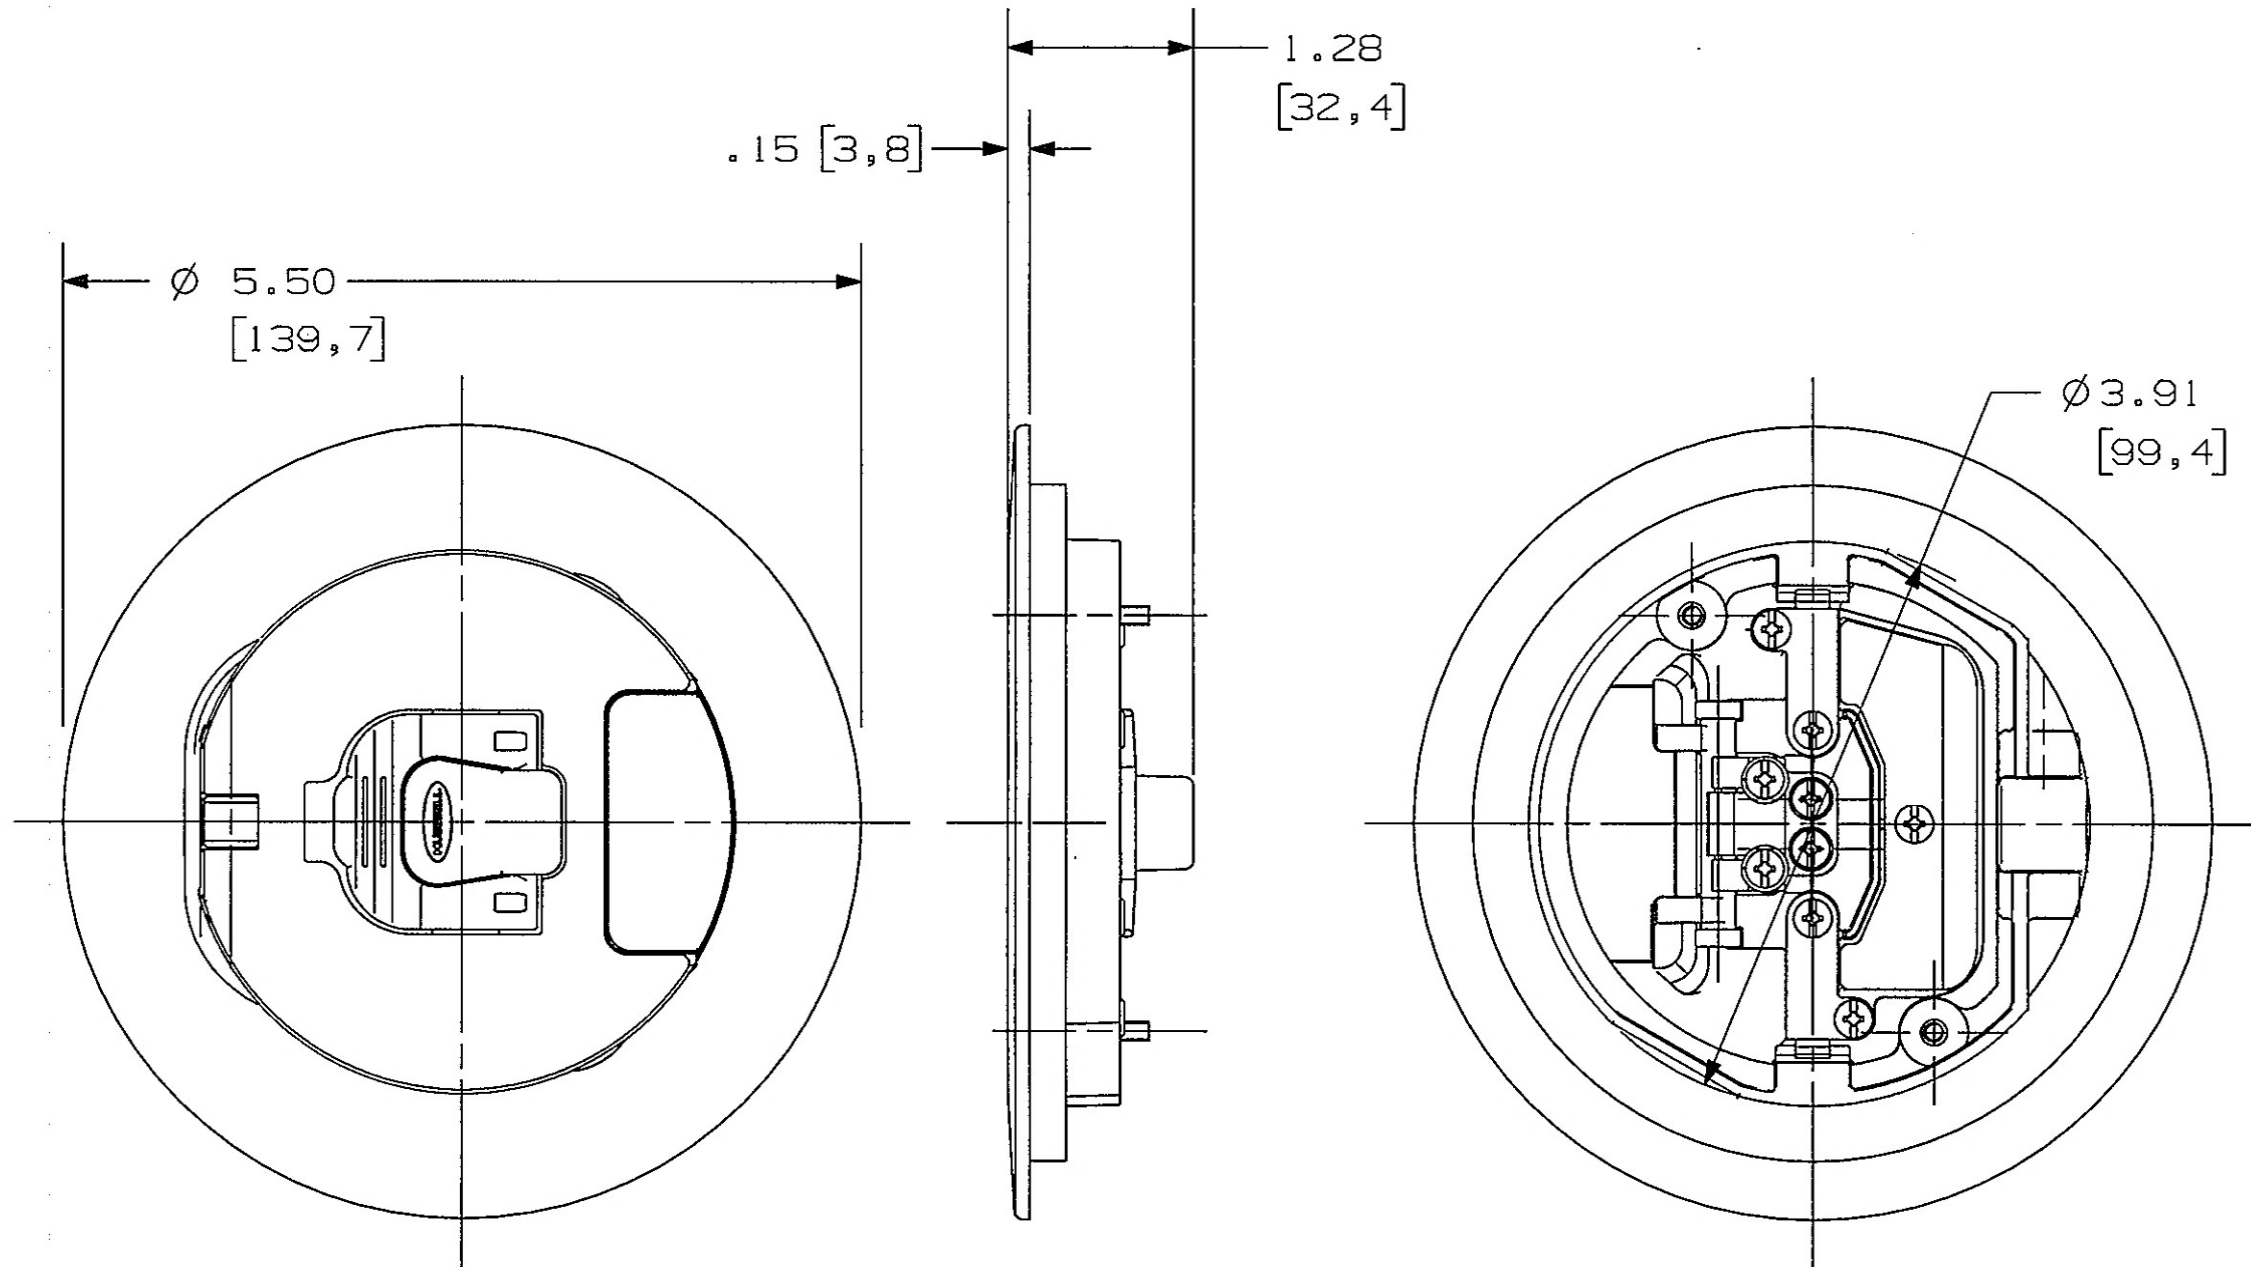

CATALOG NUMBER	FINISH
SIR4CVRBLK	BLACK POWDER COAT
SIR4CVRGRY	GRAY POWDER COAT
SIR4CVRBRS	BRASS PLATED
SIR4CVRNKL	NICKEL PLATED
SIR4CVRBRZ	BRONZE PLATED
SIR4CVRALU	BRUSHED ALUMINUM

NOTES:
 1) ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
 2) SUPPLIED WITH (2) MOUNTING SCREWS.
 3) COVER OPENS 180 DEGREES.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
FLANGE RING	ALUMINUM	SEE TABLE
MAIN DOOR	ALUMINUM	SEE TABLE
ACCESS DOOR	ALUMINUM	SEE TABLE
HANDLE	ALUMINUM	SEE TABLE
HANDLE BEARING BLOCK	ALUMINUM	SEE TABLE
LINK	ALUMINUM	SEE TABLE
SLIDERS	ALUMINUM	SEE TABLE
DOOR GASKETS	FOAM GASKET	BLACK
MOUNTING SCREWS	STEEL	ZINC PLATE
PAN HD. SCREWS	STEEL	ZINC PLATE
FIRE BARRIER	FIRE BAR. MATL.	NATURAL
SPRINGS	STEEL	ZINC PLATE
DOWEL PINS	STEEL	ZINC PLATE
SLIDER RETAINERS	STEEL	ZINC PLATE
RATCHET PLATE	STEEL	ZINC PLATE
RETAINER PLATE	STEEL	ZINC PLATE
FIRE BARRIER COVER	STEEL	ZINC PLATE

1	RELEASED PER DCN19806	APP	5/1/13
SYM	REVISIONS	APP	DATE


THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE COVER, FIRE RATED
 POKE THROUGH,
 4 INCH DIAMETER

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.01 .XXX = ±.005 ANGLES = ±2°	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
	DR. BY SRE	APP. BY [Signature]
	TR. BY	SCALE NONE
	CHK. BY [Signature]	DATE 9/11/12

DIMENSION SHEET FOR CAT. NO. M-12337
 REPAIRABLE NON-REPAIRABLE

M-12338 3

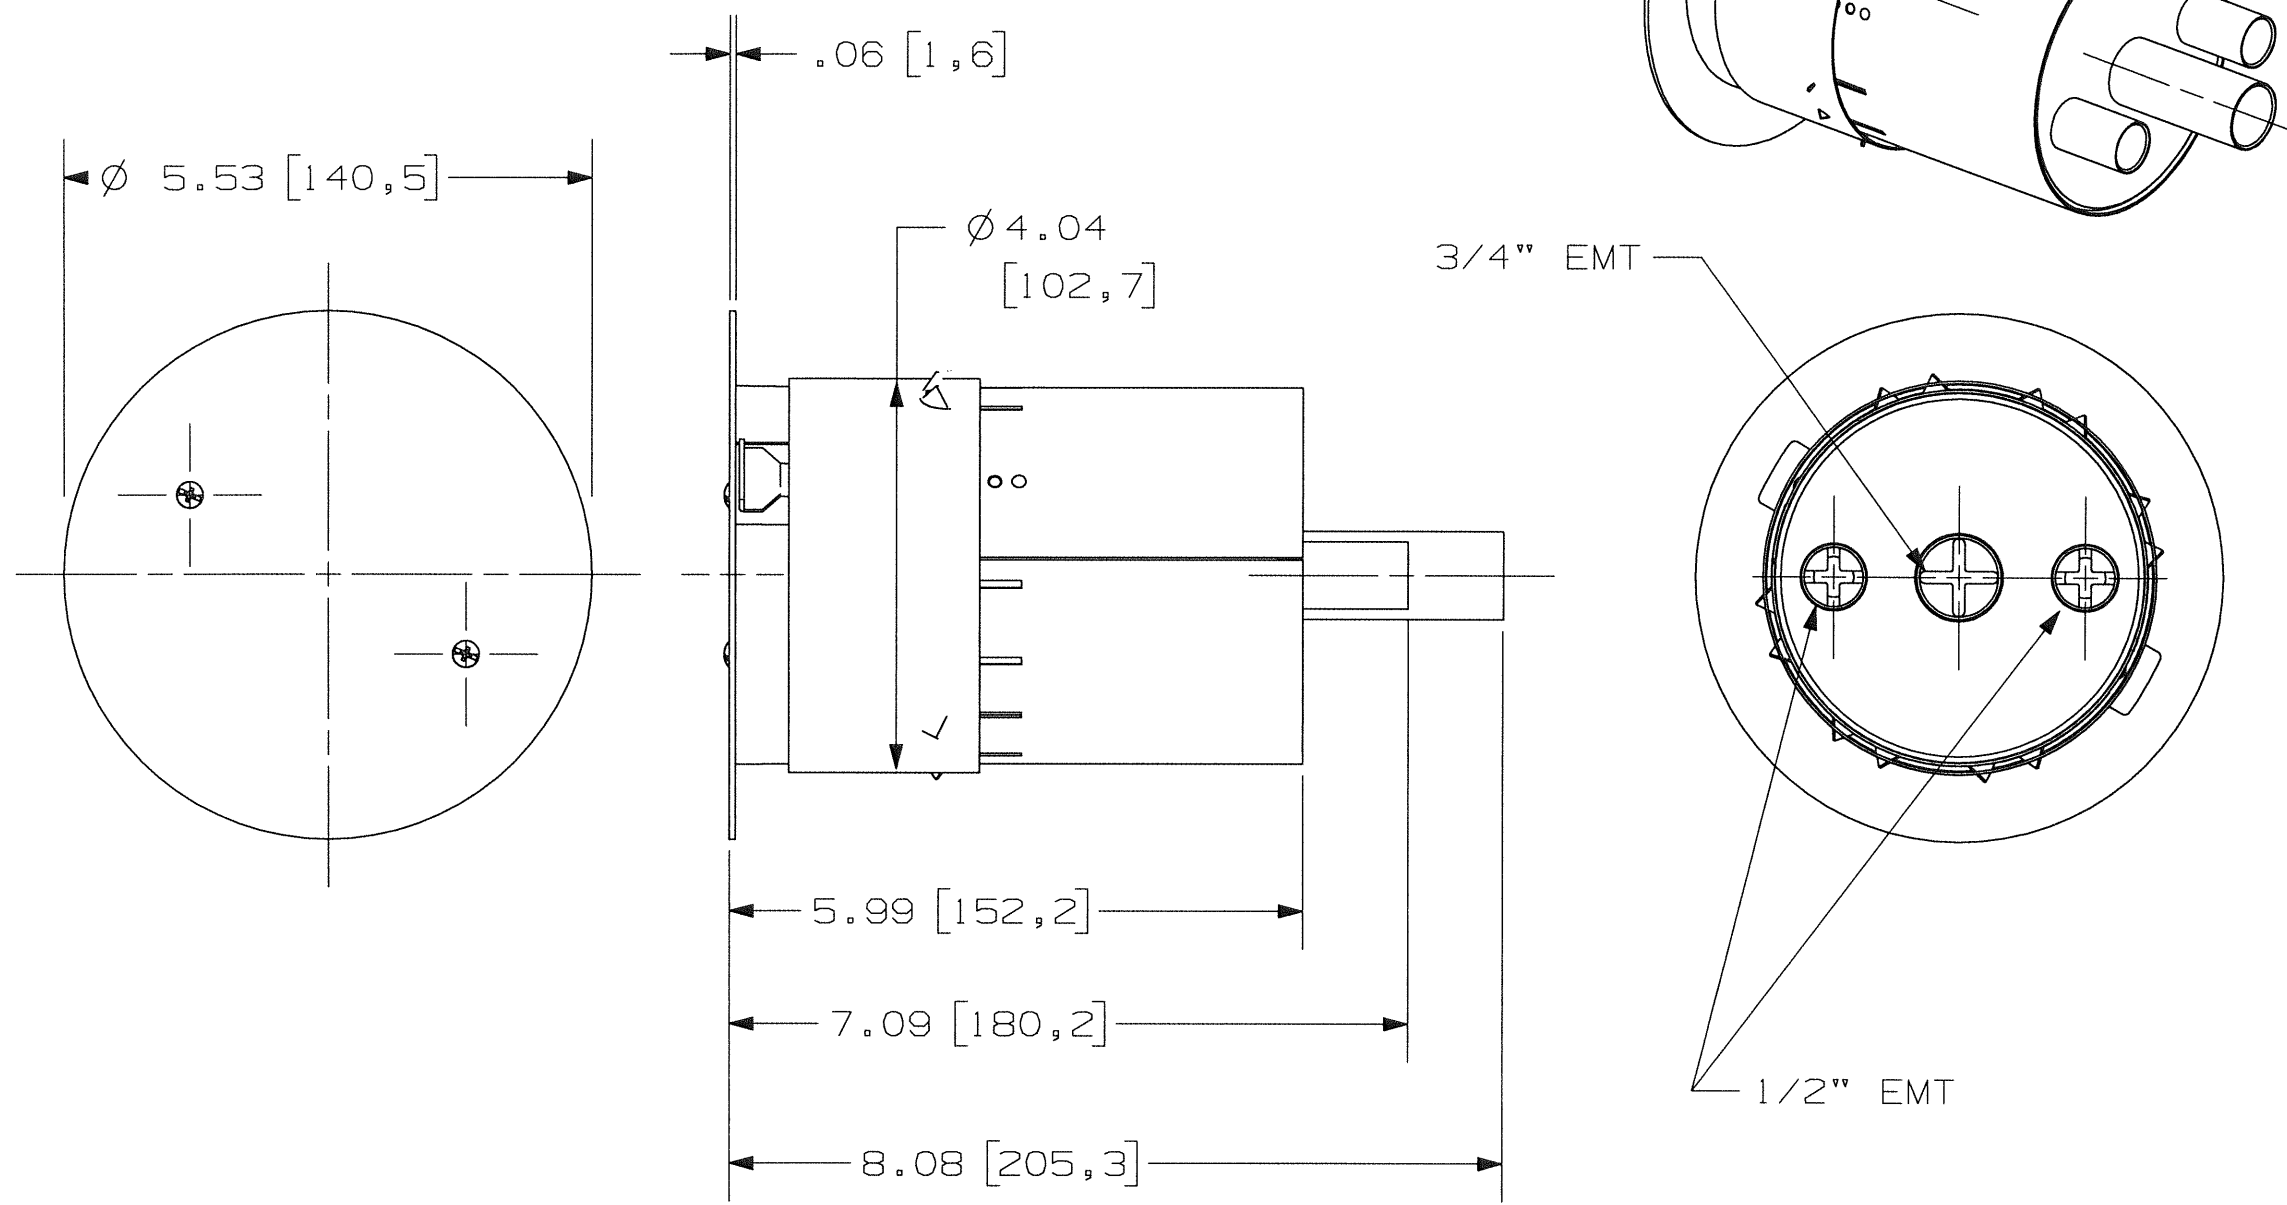

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
CAN WELDMENT	STEEL	ZINC PLATE
INSTALLATION PLATE	STEEL	ZINC PLATE
SUB-PLATE MTG. PLATE	STEEL	ZINC PLATE
STANDOFFS	STNLS. STEEL	NONE
FIRE BARRIER, UPPER	FIRE BAR. MATL.	NATURAL
FIRE BARRIER, LOWER	FIRE BAR. MATL.	NATURAL
SPACER	FIRE BAR. MATL.	BLACK
DIVIDERS	STEEL	ZINC PLATE
WASHERS	FIBER	RED
MOUNTING SCREWS	STEEL	ZINC PLATE
TAPE	PLASTIC	YELL./BLK.
BOTTOM COVER	STEEL	ZINC PLATE

DIMENSION SHEET FOR CAT. NO. SIR4PTFIT

REPAIRABLE NON-REPAIRABLE

3	ADDED SHEET 2 PER DCN23387	AD	10/18/17
2	DIM .06 [1,6] WAS .16 [4,0] DCN20139 AD		11/14/13
1	RELEASED PER DCN19806		5/1/13
SYM	REVISIONS	APP	DATE

B

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

M-12338

TITLE
SERVICE FITTING,
FIRE RATED POKE THROUGH,
4 INCH DIAMETER

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ±.01 .XXX = ±.005 ANGLES = ±2°	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
	DR. BY SRE	APP. BY
	TR. BY	SCALE 1:2
	CHK. BY	DATE 9/11/12

3

- NOTES:
- 1) ALL DIMENSIONS ARE IN INCHES AND [MILLIMETERS].
 - 2) JUNCTION BOX SIR4PTJB (NOT SHOWN) IS INCLUDED WITH FLOOR FITTING CATALOG NUMBER SIR4PTFIT. SEE DWG. M-11000 FOR DIMENSIONS OF JUNCTION BOX. JUNCTION BOX SHIPPED LOOSELY WITH UNIT.
 - 3) FOR USE IN A 4.00" - 4.12" [10,2-10,5 cm] DIAMETER HOLE. MINIMUM THICKNESS OF CONCRETE 2.25" [5,7 cm].

