M-8772 3

HUBBELL MODEL	A	B	C	D	E	F	G	H	WEIGHT (OZ.)
SS0825	59.9 (2 36)	28.2 (1.11)	M8x1	3.16 (0.12)	5.84 (0.23)	6.26 (0.24)	12.8 (0.50)	M8x1	1 1
SS0850	84.9 (3.34)	53 2 (2 09)							1.4
SS1225	61.1 (2.40)	29 4 (1.15)	M12x1	4 32 (0 17)	9.40 (0.37)	4 22 (0.17)	15 7 (0.62)	M12x1	2.1
SS1250	86.1 (3.39)	54.4 (2 14)							2.8
SS1850	86.1 (3.39)	54.4 (2.14)	M18x1	4.32 (0.17)	14.2 (0.56)	4.22 (0.17)	22.1 (0.87)	M18x1	5 9
SS1825	61.1 (2.40)	29.4 (1.15)	M18x1	4.32 (0.17)	14.2 (0.56)	4.22 (0.17)	22.1 (0.87)	M18x1	4.3

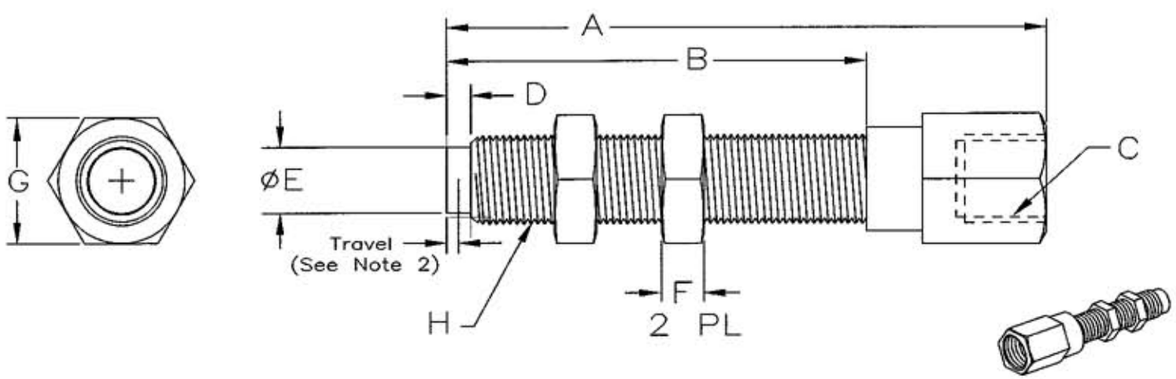

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm (INCHES)

NOTES:

1. Performance surfaces are heat-treated, alloy steel, zinc-plated.
2. Spring-loaded piston travels 1.93mm (0.076")

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
ADAPTER SCREW	STEEL	ZINC PLATED
NUTS	STEEL	ZINC PLATED

SYM	REVISIONS	APP	DATE
3	1/27/04 ADDED SS1825 TO CUSTOMER DRAWING PER DCN 11468 GDR CJC	GDR	1/27/04
2	3/28/03 ADDED SS1850 TO TABLE PER DCN #10723 RCM	DVB	3/28/03
1	4/29/02 "X" REMOVED, LAST "X" REVISION WAS X-0. RELEASED FOR PRODUCTION PER DCN #9320. GDR MJL	MJL	5/23/02

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

BANKING SCREW ADAPTORS

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY GDR	APP. BY MJL
TR. BY	SCALE NONE
CHK'D BY	DATE 4/29/02

DIMENSION SHEET FOR CAT. NO. SEE CHART

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-8772

3