M-9570 | 1



2 POLE



3 POLE



4 POLE



5 POLE

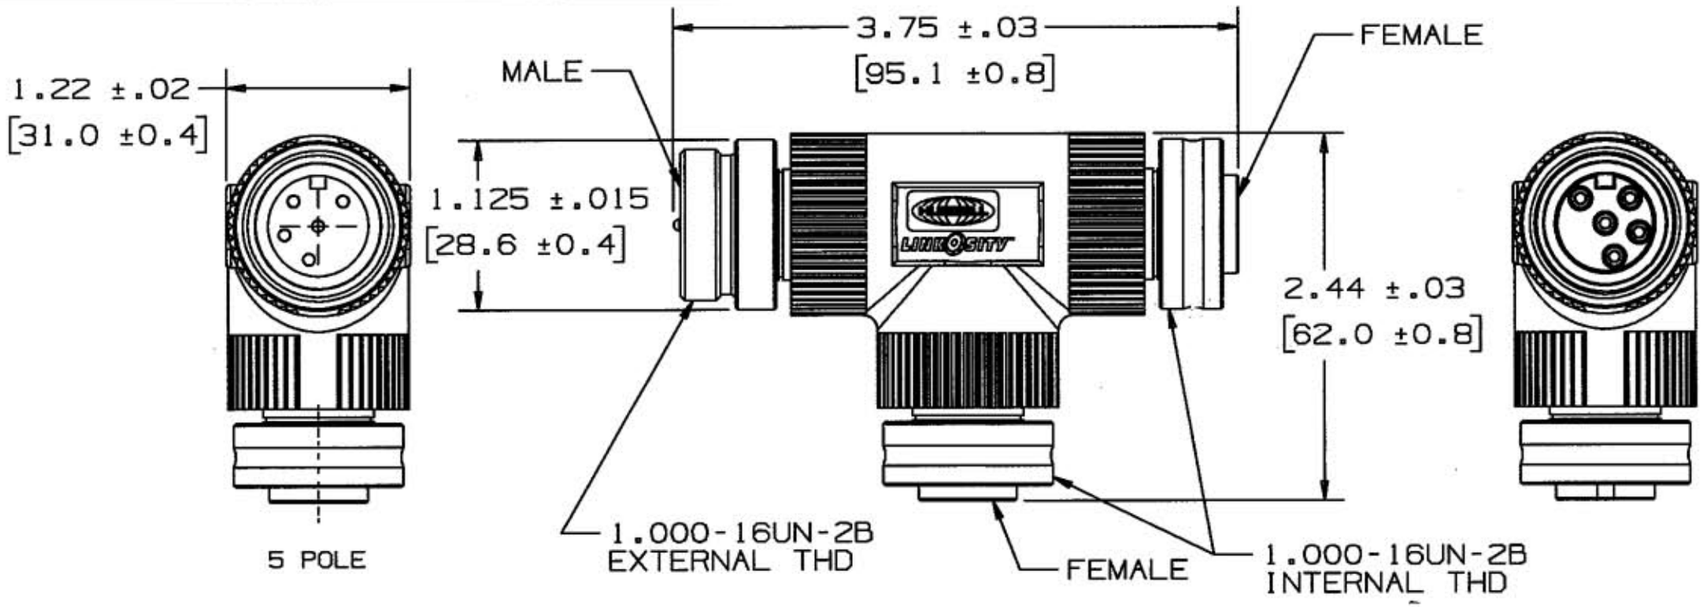

5 POLE

(CATALOG NO. TX2005002005T00 SHOWN)

NOTES:

1. ALL DEVICES ARE ENCLOSURE TYPE 4X,13 WHEN MATED 600VAC 20A MAX. PER INDIVIDUAL OUTPUT, 20A TOTAL TEE.
2. UL LISTED. NOT FOR CURRENT INTERRUPT
3. DIMENSIONS ARE IN INCHES [mm].
4. LINKOSITY™ IS A TRADEMARK OF LOCKHEED MARTIN.

CATALOG NO.	# OF POLES
TX2002002002T00	2
TX2003002003T00	3
TX2004002004T00	4
TX2005002005T00	5

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
COUPLING NUT	BRASS	NICKEL PLATE
INSULATOR SOCKET	NYLON	WHITE
O RING	RUBBER	BLACK
SOCKET CONTACT	COPPER ALLOY	GOLD OVER PD/NI
OVERMOLD	POLYURETHANE	GRAY
PIN CONTACT	BRASS	GOLD OVER PD/NI
INSULATOR PIN	NYLON	WHITE

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
1	11/03/04 RELEASED PER DCN 12045 CAC	RDK	11/4/04

B

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE

LINKOSITY™ TEE 20A

M-9570

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS ±1/64	DR. BY CAC	APP. BY RDK
DECIMALS ±.005	TR. BY	SCALE 1 : 1
ANGLES ±2°	CHK'D BY RDK	DATE 11/03/04

CODE 74545

THIRD