
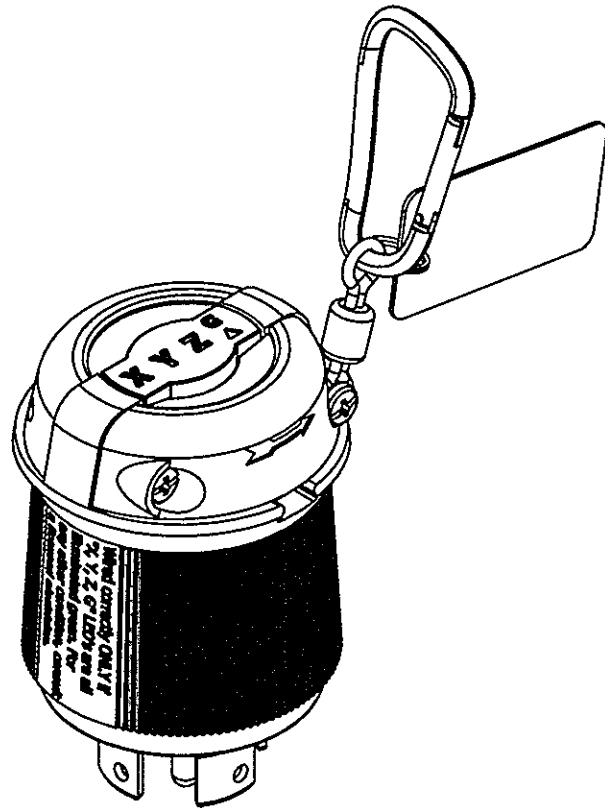
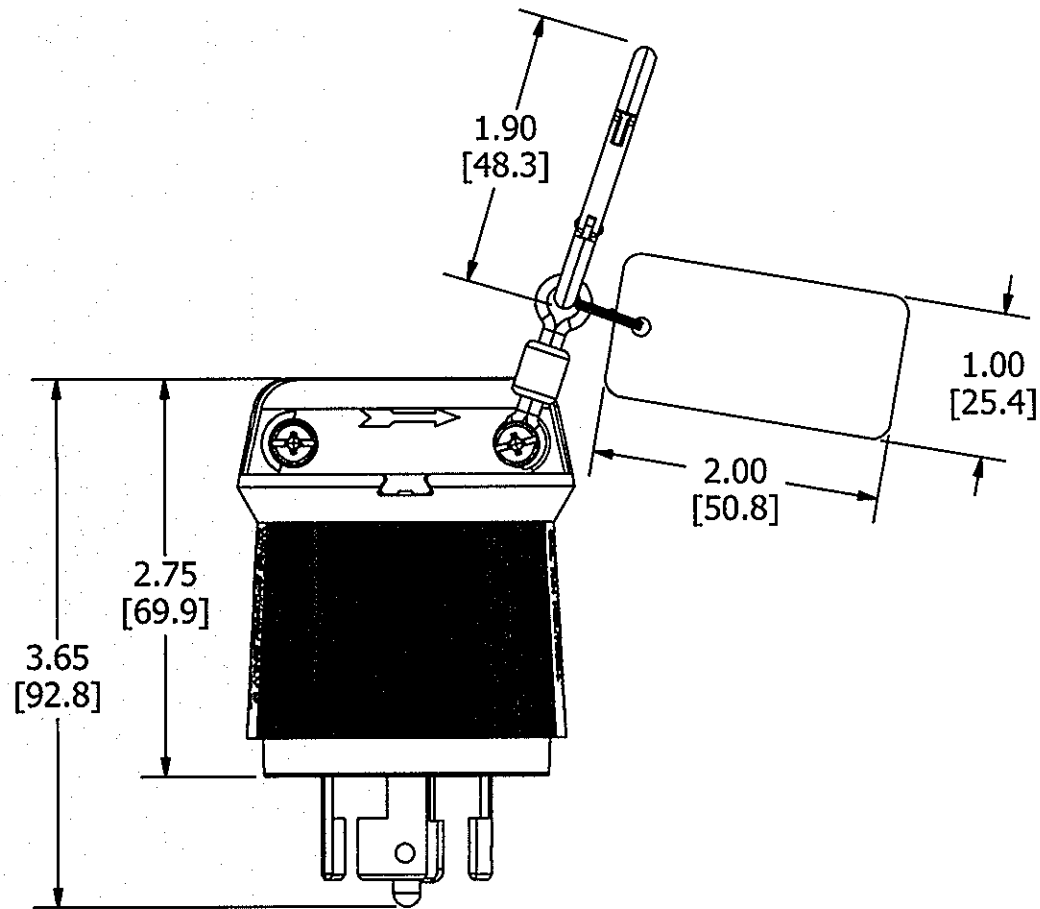


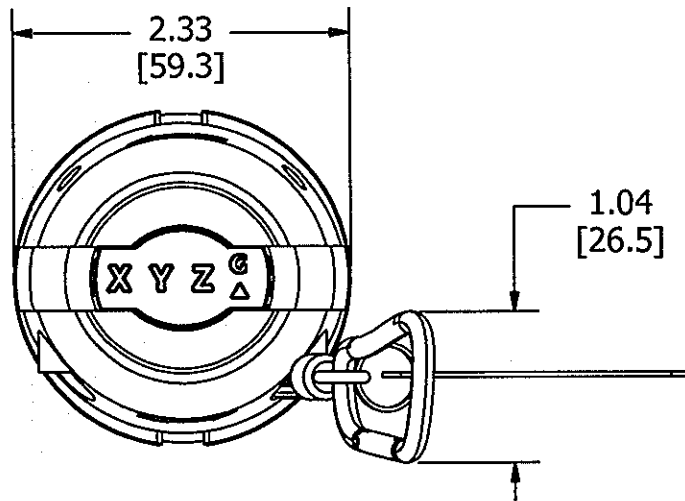

M-13245

1

| CONDITIONS   | X | Y | Z | G   |
|--------------|---|---|---|-----|
| Correct      | X | Y | Z | G   |
| Open Neutral |   |   |   | G   |
| Open Ground  | X | Y | Z |     |
| Open X       |   | Y | Z |     |
| Open Y       | X |   | Z | G   |
| Open Z       | X | Y |   | G   |
| X & N Rev.   | X | Y | Z | ▲   |
| Y & N Rev.   | X | Y | Z | G ▲ |
| Z & N Rev.   | X | Y | Z | G ▲ |
| X & G Rev.   |   | Y | Z | G ▲ |
| Y & G Rev.   | X |   | Z | G ▲ |
| Z & G Rev.   | X | Y |   | G ▲ |

| NEMA NO. | RATING                | POLE/WIRE          | CAT NO.  | CONFIGURATION |
|----------|-----------------------|--------------------|----------|---------------|
| NON-NEMA | 20A<br>3Ø 120/208 VAC | 4P/5W<br>GROUNDING | HBLT3521 |               |

LIST OF PARTS

| DESCRIPTION       | MATERIAL        | FINISH    |
|-------------------|-----------------|-----------|
| CARABINER         | ALUMINUM        | ANODIZED  |
| KEY RING          | COPPER          | PLATED    |
| KEY TAG           | PLASTIC         | LAMINATED |
| LED HOUSING       | NYLON 6/6       | ---       |
| CORD CLAMPS       | NYLON 6/6       | ---       |
| CORD CLAMP SCREWS | STAINLESS STEEL | PASSIVATE |
| COVER             | NYLON 6/6       | ---       |
| BLADE HOLDER      | NYLON 6/6       | ---       |
| ASSEMBLY SCREWS   | STAINLESS STEEL | PASSIVATE |
| BLADES            | BRASS           | PLATED    |
| TERMINAL SCREWS   | BRASS           | PLATED    |
| WIRE CLAMPS       | STEEL           | PLATED    |

|     |                                            |          |          |
|-----|--------------------------------------------|----------|----------|
| 1   | RELEASED FOR PRODUCTION<br>PER DCN # 21838 | DJR      | 1/4/2016 |
| SYM | DESCRIPTION                                | APPROVED | DATE     |

THE DESIGN AND DIMENSIONS OF THE  
PRODUCT SHOWN ON THIS DRAWING ARE  
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE  
3 PHASE TESTER

TOLERANCES UNLESS  
OTHERWISE SPECIFIED  
FRACTIONS ±1/64  
DECIMALS ±0.15  
ANGLES ±2°

WIRING DEVICE-KELLEMS  
HUBBELL INCORPORATED  
SHELTON, CT

|          |     |         |           |
|----------|-----|---------|-----------|
| DR. BY   | DJR | APP. BY | PJB       |
| TR. BY   |     | SCALE   | 3 : 4     |
| CHK'D BY |     | DATE    | 7/24/2014 |