M-5448 | 2

ALL SCREWS ARE TRI-DRIVE
SLOTTED/PHILIPS/ROBERTSON

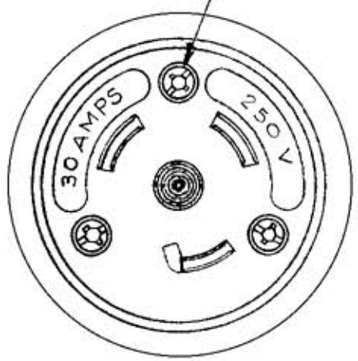

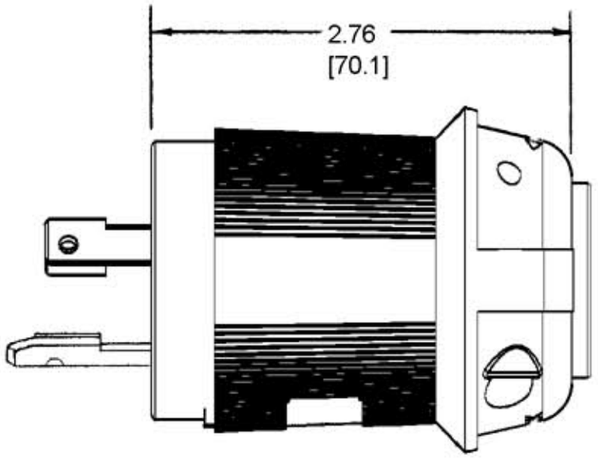

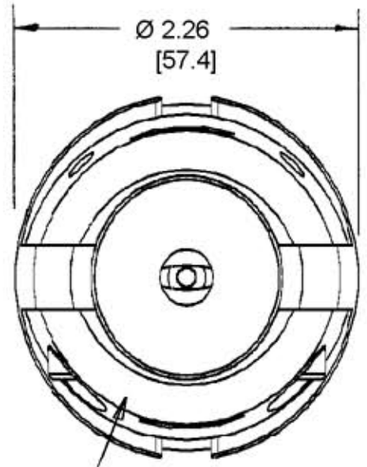

CORD CLAMP RANGE:
CORD: 16/3 - 8/3
TYPE S
14/3 - 10/3
TYPE SJ
DIAMETER RANGE:
Ø .360 - .930
[9.14 - 23.62]

NOTES:
1. ALL SCREWS ARE COMBINATION: SLOTTED/PHILIPS/ROBERTSON HEAD.
2. ALL DIMS. TO BE INCHES.
[mm]

CODE 74545

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
BLADE HOLDER	NYLON	NATURAL
RETAINER	LEXAN	CLEAR
COVER	NYLON	BLACK
CORD CLAMP	NYLON	NATURAL
BLADES	070 BRASS	
WIRE CLAMPS	.080 C.R.S.	NICKEL PL.
TERMINAL SCREWS	BRASS	1-GREEN
		2-BRASS

SYM	REVISIONS	APP	DATE
3	ADDED NOTES 1&2; REVISED VIEWS TO AGREE WITH NEW BODY STYLE; CONVERTED ALL DIMS. TO DECIMAL & METRIC; "HBL3331GC" WAS "3331 -GC" PER DCN 11902 RCM	JPP	2/5/05
2	NUMEROUS CHANGES, SEE RECORD PRINT PER DCN 4114 DJG	JZ	6/8/96
1	DIM. "A" WAS 2"±1/32 AJL		4/5/76

TITLE: 30A 250V TWIST-LOCK PLUG
NON-NEMA

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°

HARVEY HUBBELL, INC.
BRIDGEPORT, CONN.
DR. BY ASM | APP. BY
TR. BY | SCALE 1=1
CHK'D. BY | DATE 2-25-72

DIMENSION SHEET FOR CAT. NO. HBL3331GC
REPAIRABLE ☐ NON-REPAIRABLE ☒
B
M-5448
3