



## GRID-BRACE® ASSEMBLY



For Mounting of Ceiling Fan or Fixture from a Suspended Ceiling at 24" Span

### Application

RACO's GRID-BRACE ceiling support assembly is specifically designed for ceiling fan or fixture support for suspended ceilings.

### Features

- GRID-BRACE assembly has patent pending, heavy-duty design for worry-free, easy installation
- Turnbuckle and 4' chain section provided
- For threaded rod installation: Yoke provided
- Mount box anywhere on sliding bracket
- Spacers provided for decorative ceiling tiles that are below the depth of metal grid for flush mounting of box
- 4" round box, 2-1/8" deep, 22.3 cubic inches
- 4" round box has (2) 1/2" and 3/4" concentric knockouts in bottom of box
- 4" round box has (2) 1/2" knockouts in side of box
- No protruding fan mounting screws or ground screw
- #10-32 ceiling fan screws provided and provision for #8-32 bottom of box
- #10-32 ceiling fan screws are grade 5 and 1" long
- Easy to follow instructions included
- GRID-BRACE for 24" spans
- Ceiling fans: 70 Lbs. (additional support required)
- Lighting fixture: 70 Lbs. (additional support required)

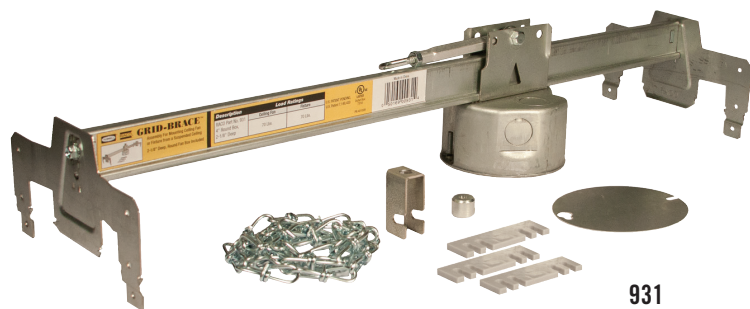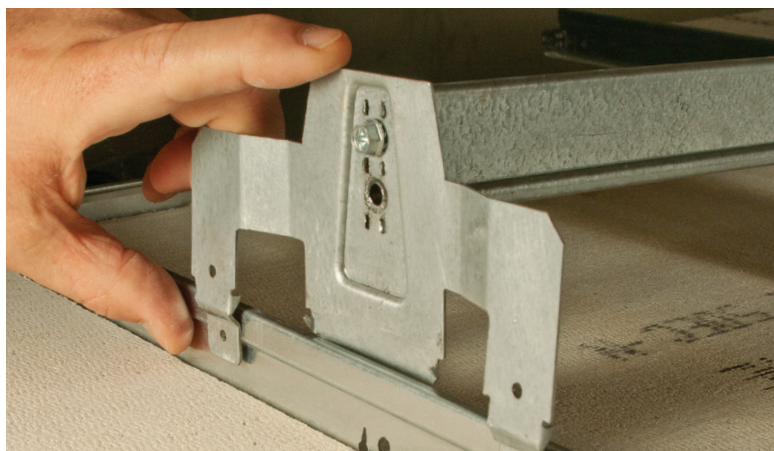

931



### For Suspended Ceilings

Catalog No.	Description	Knockouts		Std. Pkg.	UPC-A Bar Code	Recommended Maximum Support Loads	
		Side	Bottom Conduit			Ceiling Fan Lbs.	Fixture Lbs.
931	Ceiling Fan Support for Suspended Ceilings	2, 1/2"	2, 1/2" + 3/4" Concentric	4	050169009314	70	70

\*Individual display cartons

\*\*New work applications rated at 150 Lbs., Old work applications rated at 70 Lbs.

US Patent 7,148,420  
Other Patents Pending