




# LOW VOLTAGE PIR CEILING SENSOR FOR HALLWAYS

CEILING MOUNT OCCUPANCY SENSORS

## FEATURES

- 16' x 80' linear feet of coverage
- LED walk test indicator
- 8 minute - 30 minute time delay
- UL and cUL listed
- California Title 24 compliant
- Low voltage device: 24 VDC
- 5 year limited warranty

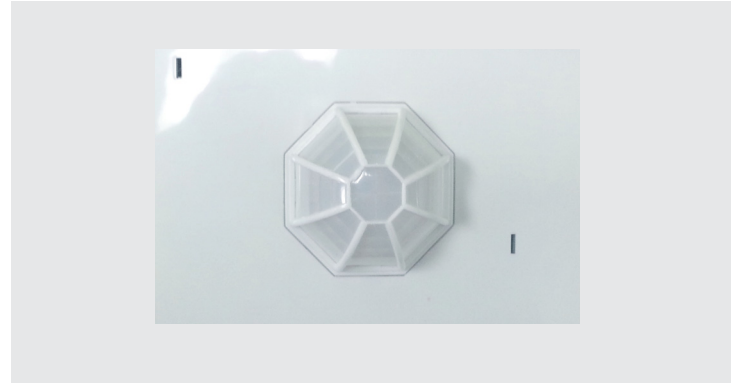

## RELATED PRODUCTS

- Ø [Occupancy Sensor Accessories](#)
- Ø [Universal Voltage Power Packs](#)
- Ø [Heavy Duty Universal Voltage Power Packs](#)
- Ø [MPSHD Pack](#)
- Ø [MP347A Power Pack](#)

## SPECIFICATIONS

### CONSTRUCTION

- Rugged, high-impact, injection-molded plastic
- Color-coded leads
- 4.72" L x 2.76" W x 1.10" D (119.8mm L x 70.0mm W x 27.9mm D)
- 3.0 oz. (85.05g)
- White

### MOUNTING

- Sensors may be mounted using a single gang mud ring attached to a 4-inch square electrical box
- Recommended MAX mounting height: 10 ft (3.05m)

### ELECTRICAL

- 24VDC (uses UVPP and MP-series power pack - not included)
- 24VDC active high logic control signal

### OPERATION

- Timer Settings
  - Timer Timeout: Fully adjustable: 30 sec. to 30 min.
- Passive Infrared: Multi-segmented, high-density Fresnel™ IR lens
- Coverage
  - 16' x 80' linear feet (4.88m x 24.38m)
- Sensitivity
  - Fully adjustable: 0% - 100%
- LED Lamp
  - Walk test indicator, Red - infrared motion

### OPERATING ENVIRONMENT

- Indoor use only
- Operating temperature: 0° to 100°F (-18° to 38°C)

### CERTIFICATIONS

- UL and cUL listed
- Title 24 compliant

### WARRANTY

- 5 year warranty
- See [HLI Standard Warranty](#) for additional information

## ORDERING GUIDE

Example: PIR1000H

CATALOG #

PIR1000H

Model

PIR1000H Passive Infrared ceiling sensor for hallway application, white, 16' x 80' linear ft

# LOW VOLTAGE PIR CEILING SENSOR FOR HALLWAYS

CEILING MOUNT OCCUPANCY SENSORS

## ADDITIONAL INFORMATION

### Coverage Pattern

