

**TITLE**  
**24**  
COMPLIANCE



**LX** Networked  
Lighting  
Controls



LXJNSYS

#### PROJECT INFORMATION

Project Name

Catalog No.

Date

LX JENEsys provides a simple and easy-to-use interface to the LX Networked Lighting Control System via Personal Computer or Building Automation System. The LX JENEsys allows any PC with an Internet Explorer compatible browser to interface with the LX JENEsys lighting control system through a built-in web server. The LX JENEsys provides an easy-to-use and highly intuitive graphical user interface (GUI). System users can easily program, monitor, and control (locally or remotely) all the functions of the LX lighting controls system conveniently from their PC—all without installing software.

The LX JENEsys is powered by the NiagaraAX Framework, which is designed to integrate diverse systems and devices. With this technology, the LX JENEsys provides protocol normalization between the LX Networked Lighting Control System and LonWorks BAS protocol. Using the Internet Explorer compatible browser, the LX JENEsys automatically builds the selected system integration, complete with the documentation of all generated network variables and control points.

#### PRODUCT FEATURES

- Real-time programming and monitoring of the LX lighting control system through your PC
- No software required—built-in web server provides connection via any Internet Explorer®-compatible browser
- Graphical User Interface (GUI) makes programming both intuitive and simple
- Local or remote access via the local network or Internet
- Can connect multiple users at once
- Sophisticated user account/password manager
- Integrates LX lighting control systems and Building Automation Systems (BAS)
- Integrates with LonWorks® standard
- Automatically generates all required control points and documentation for integration with the selected protocol
- Powered by the revolutionary NiagaraAX Framework®
- Maximum of 127 Integration Points per Network JENEsys Device




**HUBBELL**  
Control Solutions

DIN RAIL MOUNTED  
REQUIRES LXENDM  
ENCLOSURE

## LXJNSYS

REQUIRES 120VAC  
RECEPTACLE

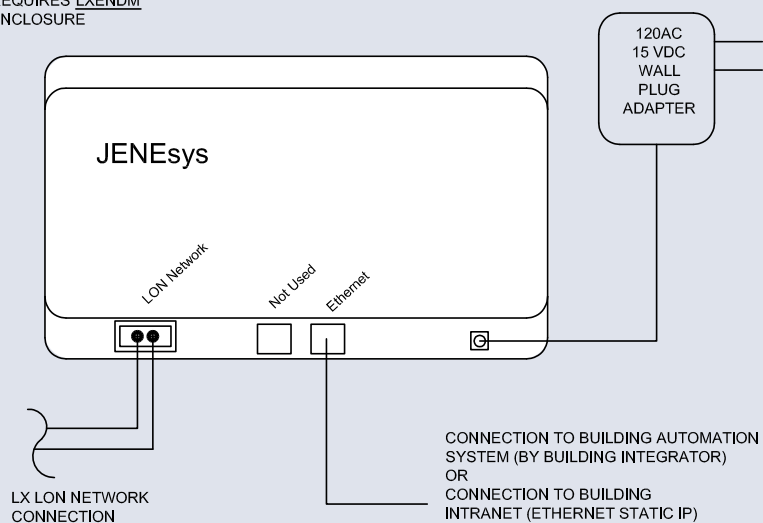

### Ordering Information

MODEL	
LXJNSYS	LX JENEsys™ Controller with Management Software, LON Network Module and Power Supply
LXJNSYS2LON	LX JENEsys Controller with Management Software, LON Integration Support, LON Network Modules and Power Supply

For other BAS Integration Support, reference LXBASM Specification Sheet  
JENEsys™ is a trademark of LynxSpring Inc.



**HUBBELL**  
Control Solutions

9601 Dessau Road | Building One | Austin, Texas 78754 | 512-450-1100 | 512-450-1215 fax | [www.hubbell-automation.com](http://www.hubbell-automation.com)

1301A 2.4.2016