


# HUBBELL

## Power Systems

### Terminal, Aluminum Compression

By ANDERSON  
Catalog # [ACF1000B](#)

Pure aluminum cast compression terminal for connecting aluminum cable to flat pad. Connector barrel is filled with rubber compatible sealant and enclosed in clear plastic bags.

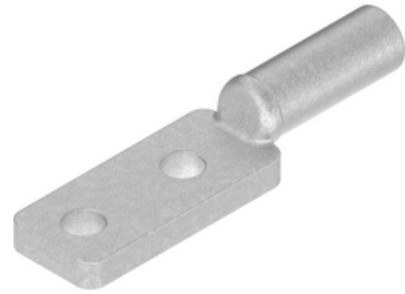

#### Features

- NEMA B 2-Hole flat compression terminal
- For use with AAC and ACSR conductor with Cable Diameter Ranges of 1.092-1.175 inches
- Material: Cast Aluminum
- Contact sealant is recommended on the pads.
- For use with conventional tooling.

#### General

EU RoHS Indicator	No
Material	Aluminum
Number of Bolt Holes	2
Number of Ground Braid Lug Holes	0
Number of Pad Holes	2
Type	Terminal, Cable to Flat
UPC	096359278962

#### Dimensions

Angle - Pad	180 °
Base Hole Spacing	0 in
Diameter - Base Holes	0 in
Diameter - Bolt	0 in
Diameter - Inside	0 in
Length - Coupling	0 in
Length Before Compression	0 in
Weight	1.666 lb
Width - Pad	1.5 in

#### Electrical Ratings

Maximum Current Rating Amps 0  
Continuous

#### Conductor Related

Conductor Compatibility	ACSR-Cuckoo-795-24/7;ACSR-Drake-795-26/7;ACSR-Condor-795-54/7;ACSR-Mallard-795-30/19;ACSR-Ruddy-900-45/7;ACSR-Canary-900-54/7;ACSR-Rail-954-45/7;ACSR-Cardinal-954-54/7;AAC-Cockscomb-900-37;AAC-Snapdragon-900-61;AAC-Magnolia-954-37;AAC-Goldenrod-954-61;AAC-Camellia-1000-61;AAC-Bluebell-1033.5-37;AAC-Larkspur-1033.5-61
Conductor Diameter - Maximum	1.196 in
Conductor Diameter - Minimum	1.092 in
Conductor Diameter Range	1.092 - 1.196
Conductor Type	AAC ACSR

#### Product Assets

- [Catalogs - Substation Connectors \(SA\)](#)
- [Sales Drawings - C-4183 \(ACF Bolted Product Family\)](#)
- [Video - Hubbell Power Systems 3D Portal to help with developing 3D models of substation connector products](#)
- [Video - Hubbell Power Systems Quick Ship](#)



**A Hubbell brand**

©2024 Hubbell Incorporated. All rights reserved  
AN-ACF1000B-SPEC-EN | REV 6/2024