


HUBBELL

Power Systems

Terminal, Aluminum Compression

By ANDERSON
Catalog # [ACF20B](#)

Pure aluminum cast compression terminal for connecting aluminum cable to flat pad. Connector barrel is filled with rubber compatible sealant and enclosed in clear plastic bags.

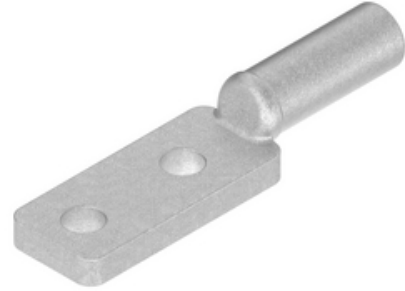

Features

- NEMA B 2-Hole flat compression terminal
- For use with AAC and ACSR conductor with Cable Diameter Ranges of 0.414-0.448 inches
- Material: Cast Aluminum
- Contact sealant is recommended on the pads.
- For use with conventional tooling.

General

| | |
|----------------------------------|-------------------------|
| EU RoHS Indicator | No |
| Material | Aluminum |
| Number of Bolt Holes | 2 |
| Number of Ground Braid Lug Holes | 0 |
| Number of Pad Holes | 2 |
| Type | Terminal, Cable to Flat |
| UPC | 096359279327 |

Dimensions

| | |
|---------------------------|----------|
| Angle - Pad | 180 ° |
| Base Hole Spacing | 0 in |
| Diameter - Base Holes | 0 in |
| Diameter - Bolt | 0 in |
| Diameter - Inside | 0 in |
| Length - Coupling | 0 in |
| Length Before Compression | 0 in |
| Weight | 0.294 lb |
| Width - Pad | 1.5 in |

Electrical Ratings

Maximum Current Rating Amps 0
Continuous

Conductor Related

| | |
|------------------------------|------------------------------------|
| Conductor Compatibility | ACSR-Quail-2/0-6/1;AAC-Aster-2/0-7 |
| Conductor Diameter - Maximum | 0.448 in |
| Conductor Diameter - Minimum | 0.414 in |
| Conductor Diameter Range | 0.414 - 0.448 |
| Conductor Type | AAC ACSR |

Logistics

| | |
|-----------------|------|
| Pallet Quantity | 2160 |
|-----------------|------|

Product Assets

[Catalogs - Substation Connectors \(SA\)](#)
[Sales Drawings - C-4183 \(ACF Bolted Product Family\)](#)
[Video - Hubbell Power Systems 3D Portal to help with developing 3D models of substation connector products](#)
[Video - Hubbell Power Systems Quick Ship](#)



A Hubbell brand

©2024 Hubbell Incorporated. All rights reserved
AN-ACF20B-SPEC-EN | REV 6/2024