


HUBBELL

Power Systems

Tee, Aluminum Bolted

By ANDERSON
Catalog # [ATTC4015](#)

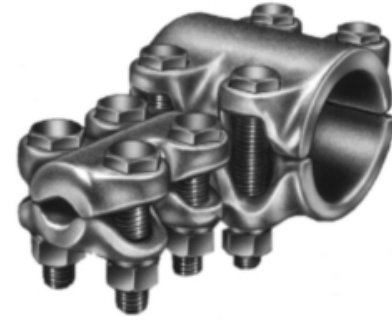

Aluminum alloy, tubing to cable, tee for connecting aluminum-aluminum or aluminum-copper conductor combinations. Clamping bolts have hex stops for one wrench installation. Contact sealant is recommended.

Features

- Tube to Cable , 4 IPS/EHIPS to 1.289-1.459 cable
- Material: Castings - 356-T6 aluminum alloy, Hardware - aluminum alloy.

General

EU RoHS Indicator	No
Material	Aluminum
Material - Clamping Hardware	Aluminum Alloy
Number of Ground Braid Lug	0
Holes	
Type	Tee, Bolted
UPC	096359288701

Dimensions

Base Hole Spacing	0 in
Diameter - Base Holes	0 in
Diameter - Bolt	0 in
Diameter - Inside	0 in
Length - Coupling	0 in
Length Before Compression	0 in
Weight	5.194 lb

Electrical Ratings

Maximum Current Rating Amps 0
Continuous

Conductor Related

Conductor Compatibility	ACSR-Finch-1113-54/19;ACSR-Bunting-1192.5-45/7;ACSR-Grackle-1192.5-54/19;ACSR-Bittern-1272-45/7;ACSR-Pheasant-1272-54/19;ACSR-Dipper-1351.5-45/7;ACSR-Martin-1351.5-54/19;ACSR-Bobolink-1431-45/7;AAC-Narcissus-1272-61;AAC-Columbine-1351.5-61;AAC-Carnation-1431-61;AAC-Gladiolus-1510.5-61;AAC-Coreopsis-1590-61
Conductor Diameter (Tap) - Maximum	1.459 in
Conductor Diameter (Tap) - Minimum	1.289 in
Conductor Type	Aluminum Bus

Product Assets

- [Catalogs - Substation Connectors \(SA\)](#)
- [Sales Drawings - C-1587 \(ATTC Product Family\)](#)
- [Video - Hubbell Power Systems 3D Portal to help with developing 3D models of substation connector products](#)
- [Video - Hubbell Power Systems Quick Ship](#)



A Hubbell brand

©2024 Hubbell Incorporated. All rights reserved
AN-ATTC4015-SPEC-EN | REV 6/2024