


HUBBELL Power Systems

Socket Clevis

By ANDERSON
Catalog # SC501

Socket clevises are used primarily for connecting associated hardware to ball and socket type insulators

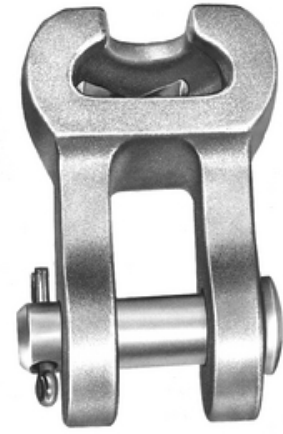

*Representative Image

Features

- "Material: Body-Galvanized ductile iron, Clevis Pin-Galvanized steel, Cotter Pin-Stainless steel
- For use with ANSI class 52-8 & 52-11 insulators
- Bolt and nut may be substituted for clevis pin by adding suffix "BNK" to catalog number
- Shield nut can be supplied by adding suffix "SN" to catalog number"

General

Catalog Number	SC501
Material	Ductile Iron
Material - Pin (Clevis)	Galvanized Steel
Material - Pin (Cotter)	Stainless Steel
Number of Bolt Holes	0
Series	SC Series
Strength Rating - Ultimate	50000 lb
Strength Rating - Ultimate Body	0 lb
UPC	096359399490

Dimensions

Assembly Rating (Ultimate)	0 lb
Clevis Opening	1.125 in
Diameter - Bolt	0 in
Diameter - Pin	0 in
Dimensions	2.375 in x 3.281 in x 2.375 in
Height	2.375 in
Insulator Throat Diameter - Maximum	0 in
Insulator Throat Diameter - Minimum	0 in
Insulator Throat Diameter Range	0 - 0
Length	2.375 in
Length - Coupling	3.281 in
Length - Pin	0 in
Maximum Adjustment	0 in
Ring Height	0 in
Weight	4.508 lb
Width	3.281 in

Conductor Related

Conductor Diameter - Maximum	0 in
Conductor Spacing	0 in

Logistics

Pallet Quantity	504
-----------------	-----

Product Assets

[Catalogs - Transmission Connectors Catalog - Full Sales Drawings - SC501 CUTSHEET](#)



A Hubbell brand

©2024 Hubbell Incorporated. All rights reserved
AN-SC501-SPEC-EN | REV 6/2024