


HUBBELL Power Systems

Compression Splice VERSA - CRIMP® Minimum Tension

By ANDERSON
Catalog # [VCSE44](#)

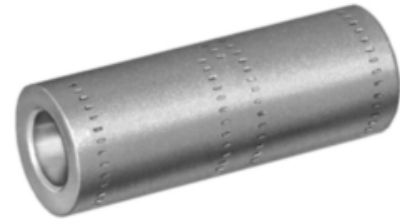

Minimum Tension VersaCrimp Aluminum Compression Splice

*Representative Image

Features

- For AL to AL, AL to CU or CU to CU connections
- For VERSA-CRIMP® tools only
- Not for copper to copper splicing
- Factory Inhibited

General

Catalog Number	VCSE44
Compression Method	VersaCrimp Tooling ONLY
Inhibitor Loaded	Yes
Material	Aluminum Alloy
UPC	096359337201

Dimensions

Dimensions	2.000 in x 0.719 in x 0.719 in
Height	0.719 in
Length	2 in
Length Before Compression	2 in
Weight	0.063 lb
Width	0.719 in

Conductor Related

Conductor Compatibility	ACSR-Turkey-6-6/1;ACSR-Swan-4-6/1;ACSR-Swanate-4-7/1;ACSR-Sparrow-2-6/1;ACSR-Sparate-2-7/1;ACSR-Robin-1-6/1;ACSR-Raven-1/0-6/1;AAC-Peachbell-6-7;AAC-Rose-4-7;AAC-Iris-2-7;AAC-Pansy-1-7;AAC-Poppy-1/0-7;AAAC 6201 Alloy-Akron-30.58-6/18;AAAC 6201 Alloy-Alton-48.69-6/18;AAAC 6201 Alloy-Ames-77.47-6/18;AAAC 6201 Alloy-Azusa-123.3-6/18
-------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Certifications And Compliance

UL Listed	No
-----------	----

Logistics

Carton Quantity	200
Pallet Quantity	16000

Product Assets

[Catalogs - Distribution Connectors](#)
[Sales Drawings - CC-9571](#)



A Hubbell brand

©2024 Hubbell Incorporated. All rights reserved
AN-VCSE44-SPEC-EN | REV 6/2024