



2.4/5/6 GHZ 7 DBI 4 ELEMENT INDOOR/OUTDOOR PATCH ANTENNA WITH RPSMA PLUGS ATS-04154 (ATS-OP-2456-7-4RPSP-36)



ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/5.15-5.85/5.925-7.125 GHz
 Gain: 6/7/7dBi
 Polarization: Vertical
 Horizontal Beamwidth: 120°/105°/105°
 Vertical Beamwidth: 45°/55°/50°
 VSWR: <1.5:1 Max: 2.0
 Isolation: >30dB
 Impedance: 50 Ω



MECHANICAL SPECIFICATIONS

Dimensions: 15.4" x 15.4" x 2.24" (390x390x57mm)
 Weight: 2.5 lb (0.68 kg)
 Connector: 4 RPSMA Plug
 Installation: Flush Mount to Wall or Articulating
 Wall/Pole Mount (Included)

Cable Length: 36" (910mm)
 Cable Type: ATS-195
 Radome Material: ASA
 Number of Leads: 4



ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Indoor only due to LPI requirements
 IP Rating: IP67

WARRANTY


2 Year Limited Warranty



VERTICAL

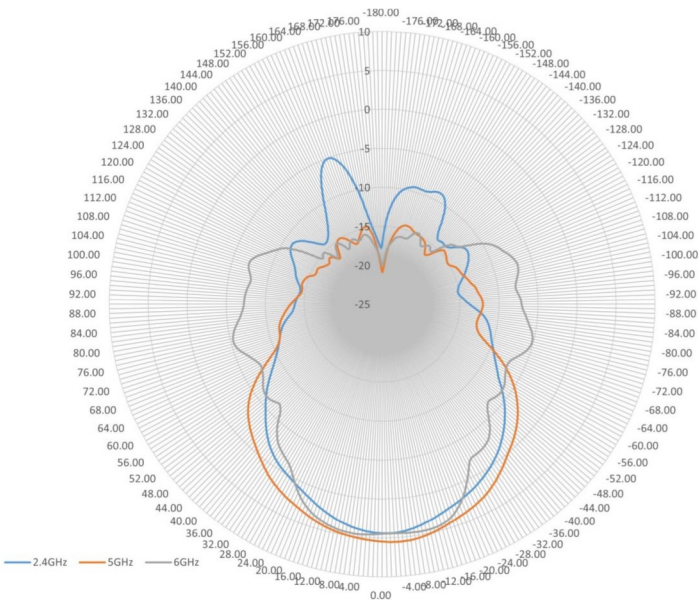

HORIZONTAL

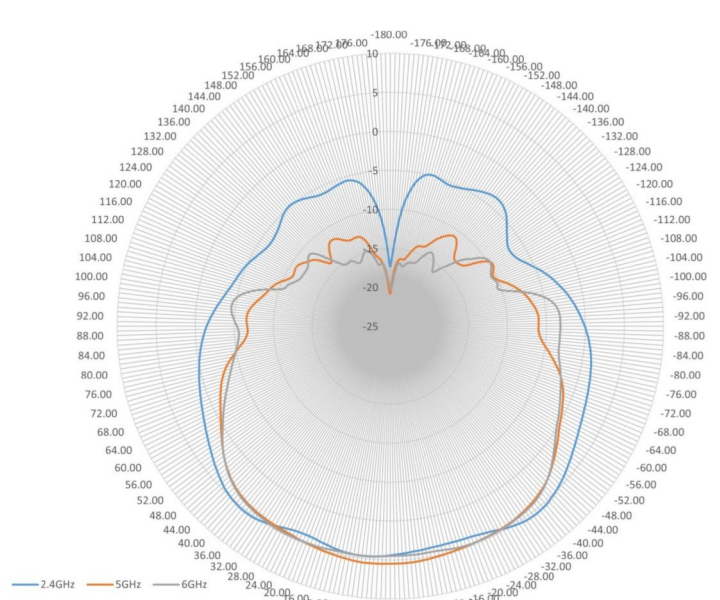



2.4/5/6 GHZ 7 DBI 4 ELEMENT INDOOR/OUTDOOR PATCH ANTENNA WITH RPSMA PLUGS ATS-04154 (ATS-OP-2456-7-4RPSP-36)

