




# Vinyl Splice For 16 - 14 AWG

By Burndy  
Catalog # SP14

Copper Splice, 16-14 AWG, 1" Splice Length, Vinyl Insulated.

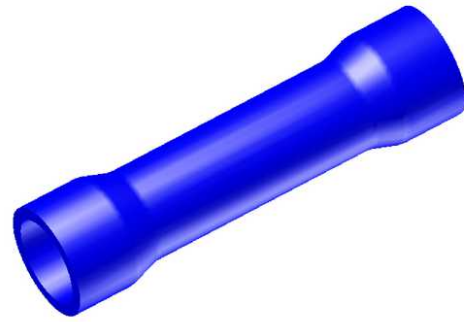

## Application

For Accommodating A Broad Range Of 600 Volt Cables

## General

|                        |                      |
|------------------------|----------------------|
| Color Code             | Blue                 |
| Connector Type         | Seamless Butt Splice |
| EU RoHS Indicator      | Yes                  |
| Feature - Barrel Style | Shrouded             |
| Insulation             | Y                    |
| Insulation Type        | Vinyl                |
| Material               | Copper               |
| Plated                 | Y                    |
| Plating Type           | Tin                  |
| Sub Brand              | VINYLINK             |
| Temperature Rating     | 105° C               |
| Trade Name             | VINYLINK™            |
| Type                   | SP                   |
| UPC                    | 781810712016         |
| UPC 12 Digit           | 7818107120166        |

## Dimensions

|                                    |          |
|------------------------------------|----------|
| Cable Insulation Diameter Maximum  | 0.180 in |
| Dimension - Diameter Max Size inch | 0.18 in  |
| Dimension - L Length Overall mm    | 25 mm    |
| Dimension - Length Overall inch    | 1.00 in  |
| Dimension - Outside Diameter inch  | 0.18 in  |
| Dimension - Strip Length inch      | 1/4 in   |

## Electrical Ratings

|                   |       |
|-------------------|-------|
| Voltage - Maximum | 600 V |
|-------------------|-------|

## Conductor Related

|                                     |                      |
|-------------------------------------|----------------------|
| Conductor - Copper Solid Size       | 16 AWG;15 AWG;14 AWG |
| Conductor - Copper Solid Size Range | 16 AWG-14 AWG        |
| Conductor - Copper Str Size         | 16 AWG;14 AWG        |
| Conductor - Copper Str Size Range   | 16 - 14 AWG          |
| Conductor Size                      | 16 - 14 AWG          |

## Certifications and Compliance

|                                    |       |
|------------------------------------|-------|
| Certification - CSA Approved       | Yes   |
| Certification - ETL                | No    |
| Certification - UL Recognized      | No    |
| Certification - cULus              | No    |
| Standards - Industry Standards Met | UL486 |
| Standards - RoHS Compliance Status | CM    |
| UL Listed                          | Yes   |

## Logistics

|                       |       |
|-----------------------|-------|
| Carton Quantity       | 600   |
| Minimum Pack Quantity | 50    |
| Pallet Quantity       | 99999 |

## Product Assets

[3D Models - SP14\\_MODEL-PDF](#)  
[3D Models - SP14\\_MODEL-IGES](#)  
[3D Models - SP14\\_MODEL-STEP](#)  
[Catalogs - Full Line BURNDY Catalog](#)  
[Customer Notices - Prop 65 Notice](#)  
[Sales Drawings - 50094190](#)



A proud member of the Hubbell Family.

©2024 Hubbell Incorporated. All rights reserved.  
BRDY-SP14-SPEC-EN | REV 1/2024

