



# ECLIPSE II

LED HighBay

The **Eclipse II** LED has been designed to make installation quick and simple. The lamp and gear chambers are separated for easy maintenance and require no special cable glands.

The luminaire also features a swing barrel nut system. This allows prior installation and wiring of the mounting base without the need to support the body and lamps. This unique design saves on both time and labour costs.



**ERC** **CE**

International Approvals

## Mounting Options

Floodlight. Pendant. Pole/Column. Wall. Medium Bay. Low Bay.

## Standard Specification

### Eclipse II Highbay

Enclosure	Painted aluminium body (RAL 7008) with glass globe
Entry	Up to 4 x M20 cable entries
Termination	3 core 6mm <sup>2</sup> max. conductor with looping
Installation	Surface mounted
Control Gear	Electronic Driver
Colour Temperature (CCT)	5000K (Cool White)
Colour Rendering Index (Ra)	>70
Maintenance	Barrel nut fastener
Ingress Protection	IP66
Surge Protection	4kV line to line, 6kV line to earth
Electrical Supply	120-254V AC 50/60Hz

## Features

- ◆ Highly **Energy Efficient**
- ◆ **Instant on** crisp white light output
- ◆ **Lower power consumption** than HID lamps
- ◆ Low temperature applications **to -40°C**
- ◆ **120,000** maintenance free hours at 25°C

Std. Cat No.	Delivered Output	Power Consumption	Ambient °C	Weight
<b>EC2I/06L/LE</b>	6278 lm	40W	-40 to +55	11.5kg
<b>EC2I/09L/LE</b>	9692 lm	65W	-40 to +55	12.0kg
<b>EC2I/12L/LE</b>	12750 lm	90W	-40 to +55	12.0kg
<b>EC2I/16L/LE</b>	17710 lm	130W	-40 to +40	12.0kg

Options - Suffix to Catalogue No.


<b>/M25</b>	M25 Cable entries	<b>/SRG</b>	Surge protection (20kA and 10kV)
<b>/WM</b>	Wall mounted version (with 2xM20 and 2xM25 entries)	<b>/ST</b>	Stanchion mounted version
<b>/PE</b>	Pendant mounted version (for M25 conduit)	<b>/ER</b>	Sealed spun reflector


## Accessories *Accessories should be ordered separately*

Order Code


Wire guard for low wattage glass globe	<b>E0850-0042</b>
Wire guard for enclosed reflector	<b>E0850-0043</b>
Dome reflector	<b>SEC20-0001</b>
30° angled reflector	<b>SEC20-0002</b>

## EC2I/\*\*L/LE

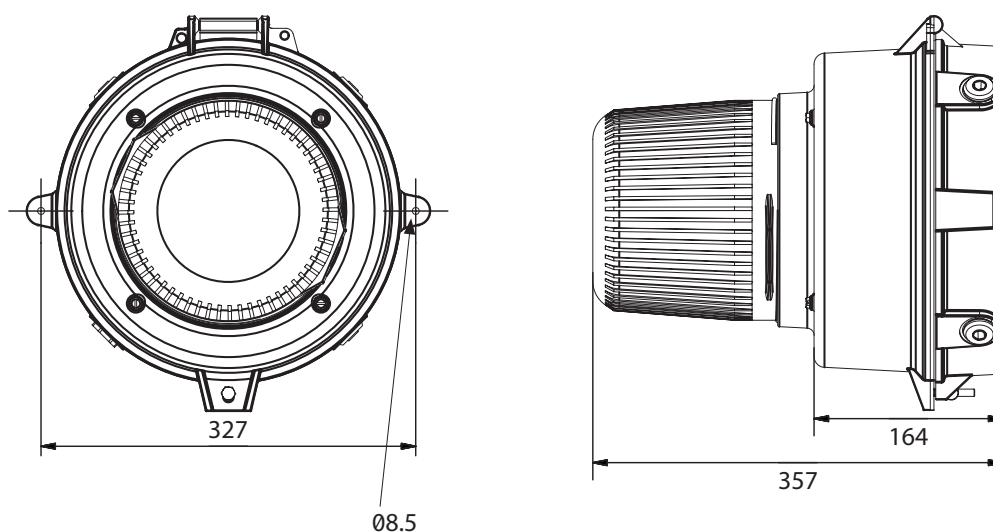


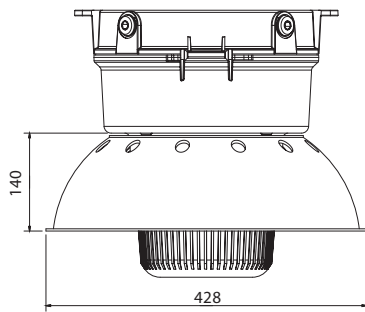


EC2I/\*\*L/LE + SEC2O-0001

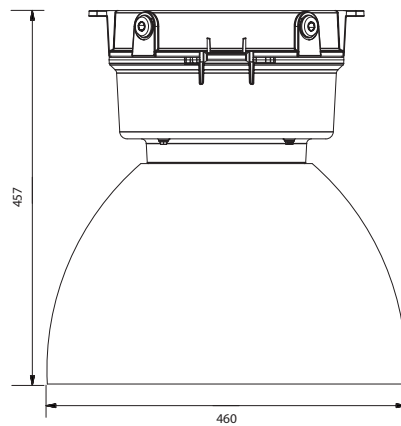


EC2I/\*\*L/LE/ER

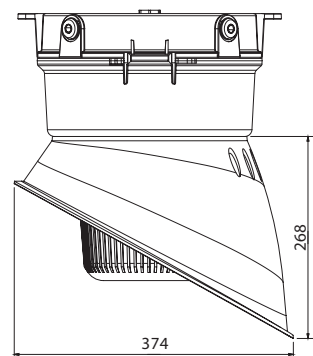


EC2I/\*\*L/LE + SEC2O-0002




EC2I/\*\*L/LE + E0850-0042

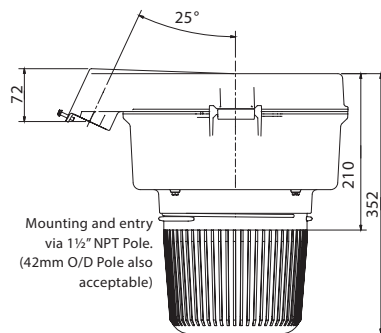

EC2I/\*\*L/LE/ST

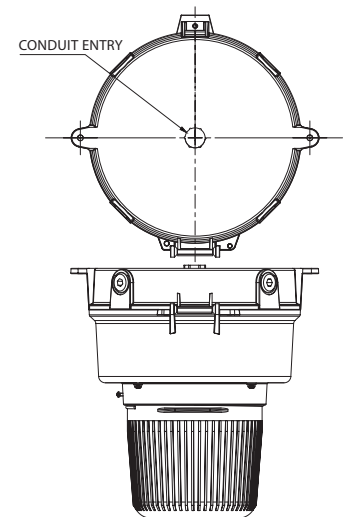

EC2I/\*\*L/LE/PE

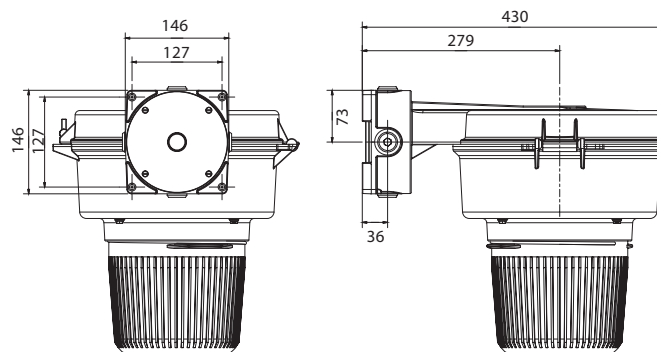

EC2I/\*\*L/LE/WM