
HUBBELL Power Systems

Vibration Damper, Stockbridge

By FARGO Catalog # 607051011



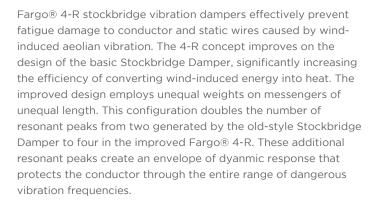

- Bare Conductor/Cable Diameter Range 0.439 0.858 in (11.2 21.9mm), Conductor/Cable Diameter Over Armor Rods Range 0.524 0.865 in (13.3 22.0mm)
- Clamp Bolt Torque 25 ft-lb
- To specify Torque Head/Break Away bolt option, add suffix "O" to catalog number.
- Galvanized steel messenger cable
- Weights are given a corrosion-resistant finish and have smooth surfaces and rounded edges to eliminate possible corona discharge.
- The bolted clamp permits easy installation on a wide range of conductor sizes. Aluminum clamping bolt ensure that damper clamp remains tight as conductor temperature changes with current load cycling.

General

Bolt Installation Torque 25 ft-lbs

(Recommended)

Catalog Number 607051011
Material - Clamp Aluminum
Material - Hardware Aluminum

Style 4R Stockbridge Damper

UPC 096359252191



Dimensions

Clamping - Maximum 0.858 in Clamping - Minimum 0.439 in Diameter - Bolt 0.5 in

Dimensions 16.2 in x 1.7 in x 4.6 in

Height 4.6 in
Length 16.2 in
Weight 4.6 lb
Width 1.7 in

Electrical Ratings

Voltage Application Standard Voltage/EHV

Conductor Related

Clamping Range 0.439- 0.858

Logistics

Pallet Quantity 168

Product Assets

Catalogs - Transmission Connectors Catalog - Full

Sales Drawings - F63140-00 Specifications - 607051011

specifications - 607051011

