




SystemOne Universal Cover Tile Flange Assembly, Brass Powder Paint Finish

By Hubbell Premise Wiring
Catalog # [SITFCBRS](#)

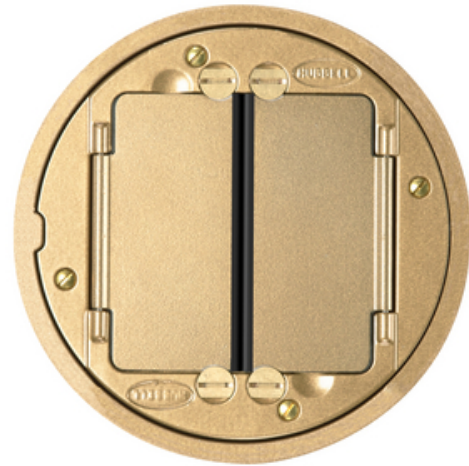

In-Floor Delivery Systems, SystemOne Universal Cover Tile
Flange Assembly, Brass Powder Paint Finish

Features

- Durable Powder Coat Finish
- Cast Aluminum Construction
- Dual Hinged Doors Open 180 Degrees
- ADA Compliant
- Scrubwater Compliant

Application

Flush SystemOne Installation

General

Application - For Use On	Tile
Color	<ul style="list-style-type: none"> • Brass • Laiton
Construction	Cast Aluminum
Cover Shape	Round
EU RoHS Indicator	No
Finish Type	Brass
Item Type	Flush Cover/Tile Flange
Material	Composite
Material - Mounting Hardware	Mounting Hardware Included
Mounting Method	To Fitting in Floor
Mounting Type	(3) Screw Mount
Number Of Outlets	No Devices
Style	Cover Flanges
Type	<ul style="list-style-type: none"> • Flush SystemOne Universal Covers • Flush SystemOne Universal Covers
Type of Use	Tile, Flush
Typical Application	Tile, Flush
UPC	783585371092

Dimensions

Width 5.62 in

Certifications and Compliance

Industry Standard(s) cULus

Logistics

Carton Quantity 5

Product Assets

[Catalog Page - PREM R16 Catalog Page](#)
[Catalog Page - PREM R45 Catalog Page](#)
[Catalogs - HPW CATALOG_2023_FULL](#)

Related Products

[S1SPMAXC - SystemOne, Sub-Plate, Recessed Bezel for \(6\) Siemon MAX Modules, Controlled Single 20A, 125V Receptacle, Black](#)
[S1SP - SystemOne, Sub-Plate, Dual StyleLine Decorator Openings, Black](#)
[S1SPORTC - SystemOne, Sub-Plate, Recessed Opening for \(3\) I-Unit Ortronics Series II Modules, Controlled Single 20A, 125V Receptacle, Black](#)
[S1SPTRACC - SystemOne, Sub-Plate, Recessed Bezel for \(6\) Ortronics TracJack Modules, Controlled Single 20A, 125V Receptacle, Black](#)
[S1SPAMM20C - SystemOne, Sub-Plate, \(2\) Hubbell Flush Keystone Openings and \(1\) StyleLine Decorator Data Opening, Controlled Single 20A, 125V Receptacle, Black](#)



A proud member of the Hubbell Family.

©2023 Hubbell Incorporated. All rights reserved.
PREM-SITFCBRS-SPEC-EN | REV 7/2023