



P300292-009-30

Description:

Fall in love with this innovative bath light. Classy, etched glass shades are aligned in a linear fashion. Each shade features a diffuser at its base constructed from glass. The shades are held in place by a sleek modern frame that is ready to help turn your home into the perfect environment for a relaxing staycation.

Specifications:

- Etched glass Shades
- Classy, etched glass shades are aligned in a linear fashion.
- Each shade features a diffuser at its base constructed from glass.
- The shades are held in place by a sleek modern frame that is ready to help turn your home into the perfect environment for a relaxing staycation.
- Ideal for any bathroom.
- Perfect for transitional, modern, or contemporary settings.
- Measures 27-3/4-inch width by 5-inch height.
- Uses four integrated LED (10w max).
- Compatible with many Triac/ELV dimmers (see dimming controls)
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 6.3125 in W., 4.75 in ht., 0.75 in depth
- Mounting backplate for outlet box included
- 6 in of wire supplied
- Americans With Disabilities Act (ADA) compliant




Performance:

Number of Modules	4
Input Power	10 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1,988/49 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cETLus Damp Location Listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2019

Dimensions:

Width: 27-3/4 in
 Height: 5 in
 Depth: 3-7/16 in
 H/CTR: 2-1/2 in

Etched glass Shades
 Width: 5-5/16 in
 Height: 0-1/8 in

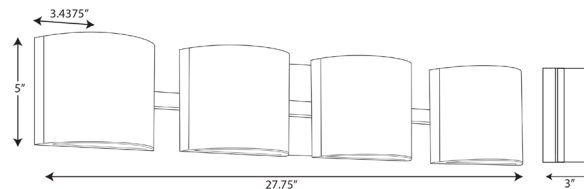

Photometrics:

P300292-009-30

ELECTRICAL DATA **P300292-009-30**

Input Voltage 120 V

Input Frequency 60 Hz

THD <20%

EMI/RFI FCC Title 47, Part 15, Class B


Operating Temperature -30 °C to 30 °C

Dimming Yes*

Over-voltage, over-current, short-circuit protected

*See Dimming Notes for more information

P300292-009-30
 LED Light Engine: 3000 K 90 CRI
 System Wattage: 10
 Fixture delivered lumens: 2011
 Fixture Efficacy: 49.8
 Spacing Criteria: 3.82 | 2.03 | 1.20

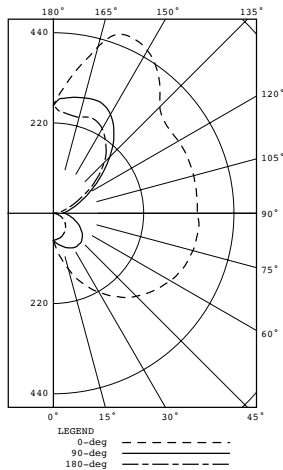

Test 19.01183 Test Date 06/26/19

CANDELA DISTRIBUTION

CANDELA DISTRIBUTION		CANDELA					FLUX
	0.0	45.0	90.0	135.0	180.0		
0	67	67	67	67	67		
5	88	81	72	65	65	7	
15	140	118	83	64	62	26	
25	197	156	93	61	57	51	
35	246	191	99	54	50	77	
45	286	218	97	45	42	102	
55	316	238	86	36	32	121	
65	339	253	69	25	22	133	
75	352	260	51	14	11	138	
85	356	259	34	5	2	135	
90	351	254	23	2	0		
95	352	255	29	9	7	136	
105	354	256	47	29	25	144	
115	354	259	78	60	57	154	
125	349	265	129	108	114	167	
135	367	299	194	161	175	180	
145	436	361	256	208	220	180	
155	468	396	291	233	248	146	
165	420	365	291	240	242	87	
175	310	297	281	251	248	27	
180	263	263	263	263	263		

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	84	4.2
0-40	161	8.0
0-60	384	19.1
0-90	791	39.3
90-120	434	21.6
90-130	600	29.9
90-150	960	47.7
90-180	1220	60.7
0-180	2011	100.0

**Dimming Notes:**

P300292-009-30 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Leviton 6672

Leviton 6674

Lutron NTEVL-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron TGCL-153-PH-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P300292-009-30