

Cylinders

Wall Mounted • Wet Location Listed **PROGRESS LED**

Description:

3" Wall Mount Up/ Down Cylinder

Specifications:

- Clear Glass Lens
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" recessed outlet box: 4.378 in W., 4.378 in ht., 0.86 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied

Performance:


Number of Modules	2Cylinder
Input Power	12 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1,766/73 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Max. Operating Temp	40 °C
Warranty	5-year Limited Warranty
Labels	CSA Wet Location Listed
	Meets California Title 24 JA8-2016

P563001-143-30K



Dimensions:

Width: 4-1/2 in
 Depth: 5-1/2 in
 Height: 8-1/4 in
 H/CTR: 5 in

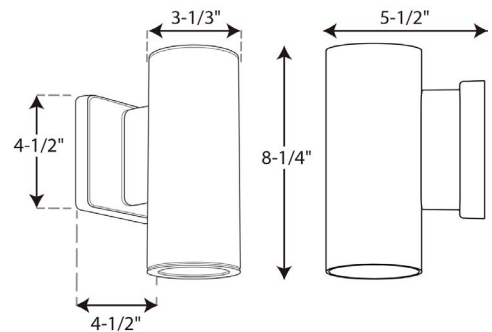


P563001-143-30K

Photometrics:

ELECTRICAL DATA	P563001-143-30K
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.202 A
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-10 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P563001-143-30K
 LED Light Engine: 3000 K 90 CRI
 System Wattage: 24
 Fixture delivered lumens: 1766
 Fixture Efficacy: 73
 Spacing Criteria: 1.26

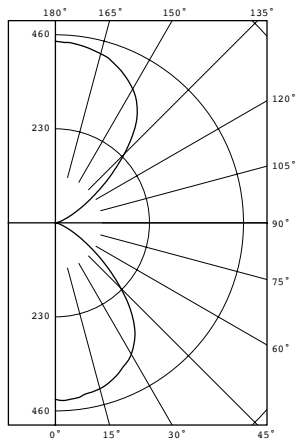

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	432	
5	433	41
15	420	118
25	390	180
35	339	210
45	226	174
55	105	96
65	35	36
75	9	10
85	1	1
90	0	
95	1	1
105	10	12
115	38	40
125	112	102
135	238	182
145	348	216
155	399	184
165	428	121
175	442	42
180	444	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	340	19.2
0-40	550	31.1
0-60	819	46.4
0-90	866	49.0
90-120	53	3.0
90-130	155	8.8
90-150	553	31.3
90-180	900	51.0
0-180	1766	100.0

Test 17.02588 Test Date 09/22/17

P563001-143-30K

Dimming Notes:

P563001-143-30K is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Diva DVELV-300P

Lutron_Caseta Wireless

Leviton_SureSlide 6672

Lutron_Ariadni AYCL-153P

Lutron_Toggler TGCL-153PH-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.