

# P9062 Large LED Track Head

Track mounted • Dry location listed



## Description:

The P9062 LED Track head with mesh back design is ideal for residential and light commercial applications. The P9062 has an integrated driver design for a small, sleek style.

## Specifications:

- Brushed Nickel (-09) (plated)
- Die Cast Aluminum construction
- Clear glass lens
- Mesh back design
- Specular reflector.
- P9051 power feed needed to electrify track.
- 48" and 96" track available (P9054 & P9058)
- Dimmable to 10% brightness (See Dimming Notes)
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

## Performance:

Number of Modules	1
Input Power	10.3w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	609/59.1 (LM-79)
CCT	2700 K
CRI	90+
Life (hours)	50,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30° C
Warranty	5 year warranty
Labels	cETLus Dry location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016


## P9062-09-27K9

## Images:



## Dimensions:

(A) Width: 3.3"  
(B) Depth: 4"  
Height: 6.8"

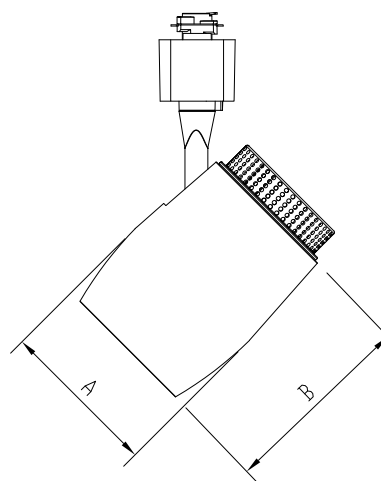

# P9062 Large LED Track Head

Track mounted • Dry location listed




## Photometrics:

## P9062-09-27K9

ELECTRICAL DATA		P9062-09-27K9
Input Voltage		120 V
Input Frequency		60 Hz
Input Current		0.087 A
Input Power		10.3
Power Factor		>0.90
THD		<20%
EMI Filtering		FCC Title 47, Part 15 Class B
Operating Temperature		-30 °C to 30° C
Dimming		Yes*
Over-voltage, over-current, short-circuit protected		
*See Dimming Notes for more information		

### P9062-09-27K9

LED Light Engine: 2700 K 90+ CRI  
 System Wattage: 10.3  
 Fixture delivered lumens: 609  
 Fixture Efficacy: 59.1  
 Spacing Criteria: 0.35

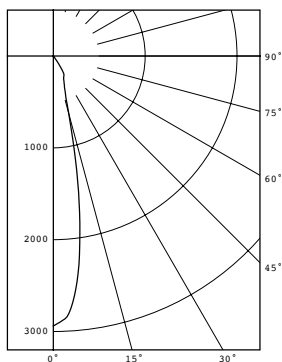

CANDELA DISTRIBUTION		
DEG	CANDELA	LUMENS
0	2940	
5	2624	218
15	648	204
25	265	127
35	70	55
45	3	3
55	2	1
65	1	1
75	0	0
85	0	0
90	0	

### ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-30	548	90.1
0-40	604	99.2
0-60	607	99.8
0-90	609	100.4
90-180	0	0.0
0-180	609	100.0

# P9062 Large LED Track Head

Track mounted • Dry location listed **PROGRESS LED**



**P9062-09-27K9**

## Dimming Notes:

---

P9062 is designed to be compatible with many Triac/Forward Phase controls.

The following is a partial list of known compatible dimmer controls.

## Dimming Controls

---

Lutron NTELV-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron Caseta

Leviton 6681

Leviton 6672

Leviton 6674

Lutron AYLC-153P

Lutron TGCL-153PH

Lutron AYLV-600P

Lutron MAELV-600

Leviton AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.