

## Straight Blade Devices, Isolated Ground, Receptacles, Duplex, Commercial/Industrial Grade, 2-Pole 3-Wire Grounding, 20A 125V, 5-20R, Gray, Single Pack

By Hubbell Wiring Device-Kellems  
Catalog # IG5362GY

Straight Blade Devices, Isolated Ground, Receptacles, Duplex, Commercial/Industrial Grade, 2-Pole 3-Wire Grounding, 20A 125V, 5-20R, Gray, Single Pack

### Application


Extra Heavy Duty Specification Grade

### Performance

- Electrical - Current Interrupting - Certified for current interrupting at full rated current
- Electrical - Dielectric Voltage - Withstands 2,000V minimum
- Environmental - Flammability - Top: UL 94V-2, Base: UL 94V-0
- Environmental - Operating Temperatures - Maximum continuous 75°C, minimum -40°C (w/o impact)
- Mechanical - Product Identification - Ratings are a permanent part of the device
- Mechanical - Terminal Accommodation - #12-#10 AWG stranded or solid copper wire only
- Mechanical - Terminal Identification - Terminals identified in accordance with UL 498 and CSA

### General

Catalog Number	IG5362GY
Color	Gray
EU RoHS Indicator	Yes
Environmental Conditions	Indoor Dry Unless Protected By Additional Means
Horsepower - Maximum	1
Item Type	Traditional Duplex
Material	Nylon
Material - Mounting Hardware	Screw Mounting
Number Of Poles	2-Pole
Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Series	Heavy Duty
Specifications	<ul style="list-style-type: none"><li>• Automatic Self-grounding Clip - Stainless steel</li><li>• Base - PBT</li><li>• Clamp - Nickel plated steel</li><li>• Contacts - 0.031" (0.8) Brass</li><li>• Face - Nylon</li></ul>

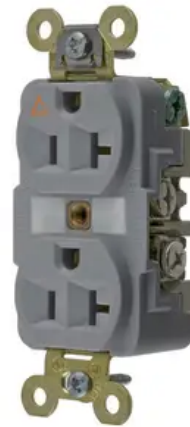

Style  
Type  
UPC

- Mounting Screws - Zinc plated steel
  - Mounting Strap - .050 in. (1.3) Brass
  - Terminal Screws - Brass
- Finder Groove Face  
Standard Duplex  
783585876870

### Dimensions

Dimensions	3.28 in x 1.33 in x 1.05 in
Display Size	Standard Sized Product
Height	1.05 in
Length	3.28 in
Weight	0.25 lb
Width	1.33 in

### Electrical Ratings

Amperage Rating	20 A
Connectivity	Back and Side Wired Screw Terminals
Current / Amperage Rating	20 A
Current Rating	20 A
Dielectric Strength	Withstands 2,000V minimum
Phase	Single Phase
Voltage Rating	125 V
Voltage Rating Description	125 V
Wattage	2500 W

### Conductor Related

Number Of Wires	3-Wire
Wire Size	#12 AWG to #10 AWG

### Certifications And Compliance

Industry Standard(s)	<ul style="list-style-type: none"><li>• Certified to CSA, C22.2, No. 42 File 285</li><li>• Fed. Spec. WC596</li></ul>
----------------------	---

- NEMA® WD-6 Compliant
- UL Listed to UL498 File No. E2186

Carton Quantity 10

Nema Rating 5-20R  
Standards - RoHS Compliance CM  
Status

### Product Assets

[Catalogs - WDK Catalog Full 2024](#)  
[Specifications - IG5362GY](#)  
[Warranty - Industrial & Commercial Products](#)

### Logistics



©2024 Hubbell Incorporated. All rights reserved  
WDK\_MX-IG5362GY-SPEC-EN | REV 10/2024