


Non-Metallic Raceway, BaseTrak Series, 2- Gang, Full Capacity Raised Box

By Hubbell Wiring Device-Kellems
Catalog # [PB3FCIB2G](#)

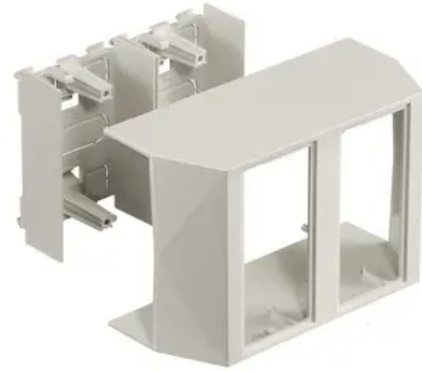

Non-Metallic Raceway, BaseTrak Series, 2-Gang, Full Capacity
Raised Box

Performance

- Environmental - Flame Rating - UL94V-0
- Environmental - Temperature Range - -25.6° to 158° F

General

Catalog Number	PB3FCIB2G
Color	Office White
EU RoHS Indicator	Contact Manufacturer
Item Type	PB3 BaseTrak Series
Number of Gang(s)	2-Gang
Series	PB3
Specifications	<ul style="list-style-type: none">• Crush Resistance - 300 lbs.• Impact Resistance - 5 ft. lbs.• Material - UV Stabilized PVC
Style	Full Capacity
Type	Boxes

UPC 783585090955

Certifications And Compliance

Industry Standard(s)	<ul style="list-style-type: none">• CSA Standard C22.2 no. 62• E118895 / E119190• UL Standard UL 5A
Standards - RoHS Compliance Status	CM

Logistics

Carton Quantity 10

Product Assets

[Catalogs - WDK Catalog Full 2024](#)
[Specifications - PB3FCIB2G](#)
[Warranty - Industrial & Commercial Products](#)