

Straight Blade Devices

20A, 125V, 2 Pole, 3 Wire Grounding

Hubbell-PRO Heavy Duty Hospital Grade Receptacles

HUBBELL

Features

- Tamper-resistant shutter complies with national electrical code requirements
- Triple wipe contacts
- High impact resistant face with circuit I.D. marking area
- Steel mounting strap

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|---|--------------|--------------|----------------|
| Hospital grade, tamper-resistant, smooth face | Black | 783585197098 | 8300BKTRA |

Standards

UL Listed to UL498 File No. E2186
Certified to CSA, C22.2, No. 42 File 285
Fed. Spec. W-C-596
NEMA® WD-6 Compliant

Specifications

| | |
|---------------------------------|-------------------|
| Face | Nylon |
| Base | PBT |
| Power Contacts | Brass |
| Ground Contacts | Brass |
| Clamping Plate | Plated steel |
| Mounting Strap | Galvanized steel |
| Automatic Self-grounding Staple | Stainless steel |
| Mounting Screws | Zinc plated steel |

Performance

| | |
|----------------------|--|
| Electrical | |
| Current Interrupting | Certified for current interrupting at full rated current |


| | |
|--------------------|---------------------------|
| Dielectric Voltage | Withstands 2,000V minimum |
|--------------------|---------------------------|

Mechanical

| | |
|-------------------------|--|
| Product Identification | Ratings are a permanent part of the device |
| Terminal Accommodation | #12-10 AWG stranded or solid copper wire only. |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA |

Environmental

| | |
|-----------------------|---|
| Flammability | UL 94V-2 |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact) |

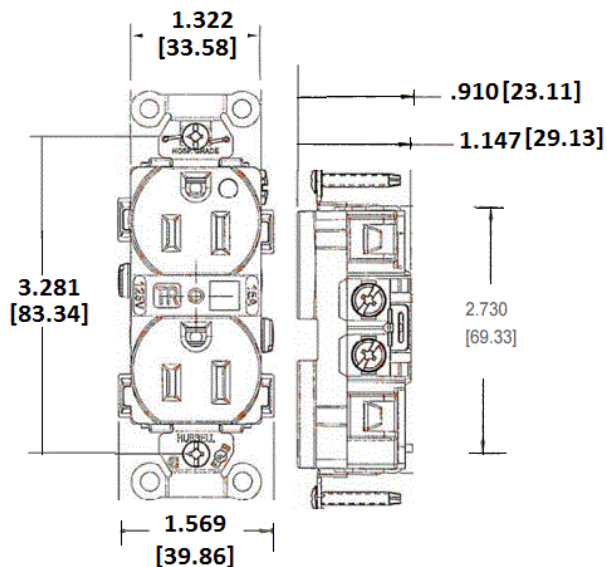

Accessories

Wallplate or Weatherproof Cover

Duplex Opening

Online Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

