

Straight Blade Devices
 15A, 125V, 2 Pole, 3 Wire Grounding
 Commercial Specification Grade Duplex
 Receptacles for Controlled Applicatoins

HUBBELL

Features

- Permanently marked with universal power symbol and the word "CONTROLLED" to visually identify receptacles used in automatic energy management systems
- Half-Controlled receptacle with one face marked and the circuit tab removed
- Complies with NEC Section 406.3, ASHRAE 90.1, and California Title 24 requirements
- Complements Hubbell's Load Logic control's or any available energy management system

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|-----------------------------------|--------------|--------------|----------------|
| Smooth face, back and side wired. | Green | 783585551142 | DR15C1GN |

Listings

UL Listed to UL498 File No. E2186
 CSA Certified 22.2, No. 42
 Fed. Spec. W-C-596
 NEMA® WD-6 Compliant

Specifications

| | |
|---------------------------------|------------------------------------|
| Face | Nylon |
| Base | Nylon |
| Power Contacts | .030 in. (.8) Brass |
| Ground Contacts | Brass |
| Wire Clamp | .062 in. (1.6) Nickel plated steel |
| Terminal Screws | Plated steel |
| Mounting Strap | .040 in. (1) Galvanized steel |
| Automatic Self-grounding Staple | Stainless steel |
| Mounting Screws | Galvanized Steel |

Performance

Electrical


| | |
|----------------------|--|
| Current Interrupting | Certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |

Mechanical

| | |
|-------------------------|--|
| Product Identification | Ratings are a permanent part of the device |
| Terminal Accommodation | #14-#10 AWG stranded or solid copper wire only |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA |

Environmental

| | |
|------------------------|---|
| Flammability | UL 94 V-2 |
| Operating Temperatures | Maximum continuous 75°C; minimum -40°C (w/o impact) |

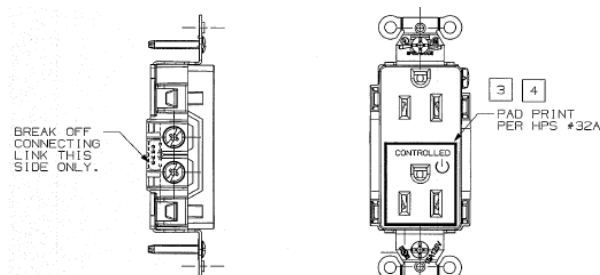

Online Resources

[eCatalog](#)

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

