**Single Pole Devices and Temporary Power**

**400A, 600V AC/DC**

# Stud Type Female Receptacles

## Ordering Information

| Description | Device Color | UPC Number | Catalog Number |
|---|---|---|---|
| 400 A,Panel Mount, thermoplastic elastomer,mates with 300 and 400A plugs | Yellow | 783585112725 | **HBLFRSY** |

## Listings

UL and cUL Listed
UL Enclosure Types 3R, 4X, 12
National Electric Code (NEC), ANSI/NFPA 70

## Specifications

| | |
|---|---|
| Base Compound | Thermoplastic Elastomer |
| Contact Material | Brass |
| Retaining Screw Material | Nylon |
| Mounting Hole | 4x Ø .20" |
| Termination | 1/2-13 UNC-2A Threaded Stud |

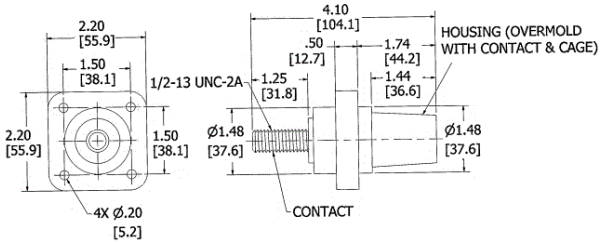


## Performance

**Electrical**

| | |
|---|---|
| Amperage Rating | 400A Maximum |
| Voltage Rating | 600V AC/DC Maximum |

**Mechanical**

| | |
|---|---|
| Product Identification | Ratings are a permanent part of device |
| Terminal Accommodation | #4 to 4/0 AWG |

**Environmental**

| | |
|---|---|
| Flammability | HB per UL94 or CSA 22.2. 0.17 |

## Online Resources

Customer Sales Drawings
eCatalog
Installation Instructions

Dimensions in Inches (mm)



Wiring Device-Kellems