#### **Straight Blade Devices**

### 20 Amp, 125 Volt, 2-Pole, 3-Wire

## **SNAPConnect® Extra Heavy Duty Receptacle**

# HUBBELL

#### **Features**

- Audible SNAP, indicates solid connection
- Reduces installation time
- Tamper-Resistant, LED Indicator
- Assembled in USA

#### **Ordering Information**

Description **Device Color UPC Number Catalog Number** SNAP5362WLTR Standard Duplex White 783585553108

#### Listings

UL Listed to UL498 File No. E2465 Certified to CSA, C22.2, No. 42 File 564 Fed. Spec. W-C-875 **NEMA® WD-6 Compliant** 

#### **Specifications**

Face	Nylon
Base	Nylon
Line Contact	Brass
Ground Contact	Brass

#### **Performance**

**Electrical** 

**Current Interrupting** Certified for current interrupting at full rated

current

Withstands 2,000V minimum Dielectric Voltage

Mechanical


**Product Identification** Ratings are a permanent part of the device

**Environmental** 

Flammability UL 94V-2

Maximum continuous 75°C; minimum -40°C Operating Temperature

(without impact)

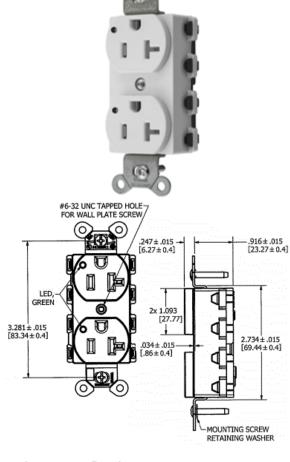

#### **Complementary Products**

Wallplate or Weatherproof Cover Opening

#### **Online Resources**

eCatalog

