Straight Blade Devices 20 Amp, 125 Volt, 2-Pole, 3-Wire SNAPConnect[®] Hospital Grade Receptacle

HUBBELL

Features


- · Audible SNAP, indicates solid connection
- · Reduces installation time
- Requires minimal box space
- · Assembled in USA

Ordering Information

UL Listed to UL498 File No. E2557 Certified to CSA, C22.2, No. 42 File 656

DescriptionDevice Color UPC NumberHospital Grade, Standard DuplexWhite783585540702

Catalog Number SNAP8300WNA

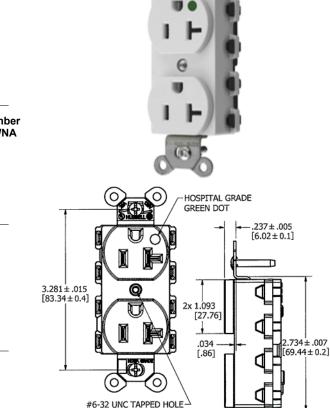

Specifications

Fed. Spec. W-C-967 NEMA® WD-6 Compliant

Listings

Face Base Line Contact Ground Contact Nylon Nylon Brass Brass

Performance

Electrical Current Interrupting

Dielectric Voltage

Mechanical Product Identification

Environmental Flammability Operating Temperature Certified for current interrupting at full rated current Withstands 2,000V minimum

Ratings are a permanent part of the device

UL 94V-2 Maximum continuous 75°C; minimum -40°C (without impact)

Complementary Products

FOR WALL PLATE SCREW

Wallplate or Weatherproof Cover Opening

Online Resources

Customer Sales Drawing eCatalog Installation Instructions



Wiring Device-Kellems

MOUNTING SCREW RETAINING WASHER