

PRMN2

DECORATIVE & POST TOP

FEATURES

- Reliable, uniform, glare free illumination
- Types 1, 2, 3, 4W, 5Q, and 5W distributions
- 3000K, 4000K, 5000K CCT
- 0-10V dimming ready
- Integral surge suppression
- Upgrade Kits



SPECIFICATIONS

CONSTRUCTION

- All housing components aluminum 360 alloy, sealed with continuous silicone rubber gaskets
- Standard configurations do not require a flat lens, optional lenses is tempered glass
- All internal and external hardware is stainless steel
- Finish: fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat
- Optical bezel finish is match the luminaire housing

LED/OPTICS

- Optical cartridge system consisting of a die cast heat sink, LED engine, TIR optics, gasket and bezel plate.
- Cartridge is easily disassembled to replace components. Optics are held in place without the use of adhesives.
- Molded silicone gasket ensures a weather-proof seal around each individual LED.
- Features revolutionary individual LED optical control based on high performance TIR optical designs.
- House Side Shield is available on Standard and Clear Lens options except any Type 5 distribution. House Side Shield is not available for any distribution using a Diffused Lens.


INSTALLATION

- Fixtures must be grounded in accordance with national, state and/or local electrical codes.

Failure to do so may result in serious personal injury.

ELECTRICAL

- Luminaires have integral surge protection, UL recognized and have a surge current rating of 10,000 Amps using the industry standard 8/20uSec wave and surge rating of 372J
- Drivers are UL recognized with an inrush current maximum of <20.0 Amps maximum at 230VAC
- 100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control



- Driver and surge suppressor are mounted to a prewired tray with quick disconnects that may be removed from the gear compartment

CONTROLS

- Egress adapter(s) shall slip over a 4"/100mm DIA. pole with the luminaire or arm slipping over the adapter to add a total of 4.5"/114mm to

PROMENADE



Promenade PRMN2

RELATED PRODUCTS

[PRMD2](#)

[PRMS2](#)

[PRM22](#)

[PRM32](#)

the overall height. Adapter(s) shall be prewired, independently rotatable 359°, and have a cast access cover with an integral lens and lanyard.

CONTROLS (CONTINUED)

- Photocell adapter shall include an internal twist lock receptacle. Photocell by others.
- Egress adapter shall require an auxiliary 120 volt supply for operation of an integral MR16 lamp in the event of emergency. The lamp may be aimed and locked into position with an adjustment range of 15°-45°. Adapter shall have a socket that accepts miniature bi-pin MR16 lamps up to 50 watts, lamp by others

CERTIFICATIONS

- ETL listed under UL 1598 and CSA C22.2 No. 250.0-08 for wet locations
- This product qualifies as a "designated country construction material" per FAR 52.225-11 Buy American-Construction Materials under Trade Agreements effective 6/06/2020. [See Buy American Solutions.](#)

WARRANTY

- See [HLL Standard Warranty](#) for additional information

KEY DATA	
LUMEN RANGE	6,200-17,600
WATTAGE RANGE	55-159
EFFICACY RANGE (LPW)	93-134
INPUT CURRENT RANGE (mA)	245-700 mA
WEIGHT	38 lbs/17 kg
EPA	1.53

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

ORDERING GUIDE

Example: PRMN2-72L-365-3K7-4W-BL-TRA1M-CL-HS-AD5-UNV

CATALOG #


HOUSING

PRMN2											
Housing		LED Quantity		Lumen output		CCT/CRI		Distribution		Finish	
PRMN2	Promenade	72L	72 LED	245	450mA, MicroCore Equivalent	AMB	Amber-595nm Peak ¹	1	Type I	BLS	Black Gloss Smooth
				335	335mA, 8,500 lumens	3K7	3000K, 70 CRI	2	Type II	BLT	Black Matte Textured
				365	700mA, MicroCore Equivalent	4K7	4000K, 70 CRI	3	Type III	DBS	Dark Bronze Gloss Smooth
				500	500mA, 12,000 lumens	5K7	5000K, 70 CRI	4W	Type IV Wide	DBT	Dark Bronze Matte Textured
				700	700mA, 16,000 Lumens			5Q	Type V Square	GTT	Graphite Matte Textured
								5W	Type V Wide	LGS	Light Grey Gloss Smooth
										LGT	Light Grey Matte Textured
										PSS	Platinum Silver Gloss Smooth
										VGT	Verde Green Matte Textured
								WHS	White Gloss Smooth		
									WHT	White Matte Textured	
Color Option											
CC ² Custom Color											

Mounting			Optional Lens		Options		Options Photocontrol Egress		Mounting Options		Voltage	
STND_MNT Standard mounting slips over a 4"/100mm pole or may choose one			DL	Diffused Lens	HS	House Side Shield	PCA-C	Photocontrol Adaptor Cont.	AD5	Adaptor-5" OD Pole	UNV	120-277V
					BPS	Brass Painted Struts						
Post Top Mount					CHC	Copper Hood Cover	PCA-T	Photocontrol Adaptor Trad.				
Slips over a 5"/125mm DIA. pole or tenon					BHC	Brass Hood Cover	EPA-C	Egress Adaptor Contemporary				
PT5					SF	Single Fuse (120,277, 347)	EPA-T	Egress Adaptor Traditional				
Pole Mount Arms					DF	Double Fuse (208,240, 480)						
Slips over a 4"/100mm DIA. pole or tenon												
SLA1	SLA1-2											
Bolts to the side of a 4"/100mm DIA. or 5"/125mm DIA. pole												
TRA1M	TRA1L	TRA3 TRA5U										
TRA55	TRA56 (4" only)											
TRA57	TRA6U											
Wall Mount												
WMA1M	WMA1L											
WMA3	WMA35U											
WMA36U	WMA55											
WMA56	WMA57											
WMA7	WMA9U											
Pier Mount												
PM1	PM2											
PM3												

<

DIMENSIONS



Notes:

- 1 Turtle Friendly
- 2 Consult factory for custom color, marine and corrosive finish options

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

DELIVERED LUMENS

The table below shows the delivered lumens for the various lumen outputs and beam distributions. Use this chart in connection with the lumen factor (LF) capability to deliver any output required.

LED #	Drive Current	Lumen Package	Lens	Distribution	3000K 70CRI				4000K 70CRI				5000K 70CRI						
					Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)
72	245	Microcore Equivalent	Clear Lens	1	6854	1	3	1	125.08	7080	1	3	1	129.20	7345	1	3	1	134.03
				2	6435	2	3	2	117.43	6647	2	3	2	121.30	6896	2	3	2	125.83
				3	8410	2	3	2	153.47	8687	2	3	2	158.52	6829	2	3	2	124.62
				4W	6292	2	3	2	114.82	6499	2	3	2	118.60	6743	2	3	2	123.04
				1-HS	4040	1	3	1	73.72	4173	1	3	1	76.15	4329	1	3	1	79.00
				2-HS	3337	1	3	1	60.89	3447	1	3	1	62.90	3576	1	3	1	65.25
				3-HS	3121	1	3	1	56.95	3223	1	3	1	58.82	3344	1	3	1	61.02
				4W-HS	3162	1	3	1	57.71	3267	1	3	1	59.61	3389	1	3	1	61.84
				5Q	6681	2	3	1	121.92	6901	2	3	1	125.93	7159	3	3	1	130.65
				5W	6188	3	3	1	112.91	6391	3	3	1	116.63	6630	3	3	1	120.99
	335	8,500		1	9046	1	4	1	119.08	9343	1	4	1	123.01	9693	1	4	1	127.47
				2	8492	2	3	2	111.80	8772	2	3	2	115.48	9100	2	3	2	119.86
				3	8410	2	3	2	110.11	8687	2	3	2	114.26	9012	2	3	2	118.39
				4W	8304	2	3	2	109.32	8577	2	3	2	112.92	8898	2	3	2	116.91
				1-HS	5331	1	3	1	70.19	5507	1	3	1	72.50	5713	1	3	1	75.35
				2-HS	4404	1	3	1	57.98	4549	1	3	1	59.89	4719	1	3	1	62.27
				3-HS	4118	1	3	1	54.22	4254	1	3	1	56.00	4413	1	3	1	58.16
				4W-HS	4173	1	3	1	54.94	4311	1	3	1	56.75	4472	1	3	1	59.14
				5Q	8817	3	3	1	116.07	9107	3	3	1	119.90	9448	3	3	1	124.40
				5W	8166	3	3	2	107.50	8434	3	3	2	111.04	8750	3	3	2	115.34
	365	Microcore Equivalent		1	9694	1	4	1	176.90	10013	1	4	1	182.72	10388	1	4	1	189.56
				2	9101	2	3	2	166.07	9401	2	3	2	171.54	9752	2	3	2	177.96
				3	8410	2	3	2	153.47	8687	2	3	2	158.52	9658	2	3	2	176.24
				4W	8899	2	3	2	162.39	9192	2	3	2	167.74	9536	2	3	2	174.01
				1-HS	5714	1	3	1	104.26	5902	1	3	1	107.70	6123	1	3	1	111.72
				2-HS	4719	1	3	1	86.12	4875	1	3	1	88.96	5057	1	3	1	92.29
				3-HS	4413	1	3	1	80.54	4559	1	3	1	83.19	4729	1	3	1	86.30
				4W-HS	4472	1	3	1	81.61	4620	1	3	1	84.30	4793	1	3	1	87.46
				5Q	9449	3	3	1	172.42	9760	3	3	1	178.10	10125	3	3	1	184.77
				5W	8751	3	3	2	159.69	9039	3	3	2	164.95	9377	3	3	2	171.12
	500	12,000		1	12674	2	4	2	110.21	13091	2	4	2	113.84	13581	2	4	2	118.10
				2	11899	2	3	2	103.47	12290	2	3	2	106.87	12750	3	3	3	110.87
				3	11784	2	3	2	102.47	12172	2	3	2	105.84	12627	2	3	2	109.80
				4W	11634	2	3	3	101.17	12018	3	3	3	104.50	12467	3	3	3	108.41
				1-HS	7470	1	3	1	64.96	7716	1	3	1	67.10	8005	1	3	1	69.61
				2-HS	6170	1	3	1	53.65	6373	1	3	1	55.42	6612	1	3	1	57.50
				3-HS	5770	1	3	1	50.18	5960	1	3	1	51.83	6183	1	3	1	53.77
				4W-HS	5847	1	3	1	50.85	6040	1	3	2	52.52	6266	1	3	2	54.49
				5Q	12354	3	3	2	107.42	12760	3	3	2	110.96	13238	3	3	2	115.11
				5W	11441	4	3	2	99.49	11818	4	3	2	102.76	12260	4	3	2	106.61
700	16,000	1	16478	2	4	2	103.56	17021	2	4	2	106.97	17658	2	4	2	110.97		
		2	15470	3	4	3	97.22	15979	3	4	3	100.42	16577	3	4	3	104.18		
		3	15320	3	4	3	96.28	15825	3	4	3	99.45	16417	3	4	3	103.17		
		4W	15127	3	3	3	95.06	15625	3	3	3	98.19	16209	3	3	3	101.87		
		1-HS	9712	1	4	1	61.04	10032	1	4	1	63.05	10407	1	4	1	65.41		
		2-HS	8022	1	3	1	50.42	8287	1	3	1	52.08	8597	1	3	1	54.03		
		3-HS	7502	1	3	2	47.15	7749	1	3	2	48.70	8039	1	3	2	50.52		
		4W-HS	7602	1	3	2	47.78	7853	1	3	2	49.35	8147	1	3	2	51.20		
		5Q	16062	3	4	2	100.94	16591	3	4	2	104.26	17211	4	4	2	108.17		
		5W	14875	4	3	2	93.48	15365	4	3	2	96.56	15940	4	3	2	100.17		

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

DELIVERED LUMENS

The table below shows the delivered lumens for the various lumen outputs and beam distributions. Use this chart in connection with the lumen factor (LF) capability to deliver any output required.

LED #	Drive Current	Lumen Package	Lens	Distribution	3000K 70CRI				4000K 70CRI				5000K 70CRI						
					Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)	Lumen	Bug Rating			Efficacy (Lm/W)
72	245	Microcore Equivalent	Diffused Lens	3	5839	1	4	3	106.5	6031	2	4	3	110.1	6257	2	4	3	114.2
				5W	5271	2	4	3	96.2	5444	2	4	3	99.3	5648	2	4	3	103.1
	335	8,500		3	7135	2	4	3	93.92	7370	2	4	3	97.02	7646	2	4	3	100.62
				5W	6983	3	4	3	91.92	7213	3	4	3	94.95	7483	3	4	3	98.53
	365	Microcore Equivalent		3	7677	2	4	3	93.4	7930	2	4	4	96.5	8227	2	4	4	100.1
				5W	7454	3	4	3	90.7	7700	3	4	3	93.7	7988	3	4	3	97.2
	500	12,000		3	10037	2	5	4	87.28	10368	2	5	4	90.16	10756	2	5	4	93.53
				5W	9746	3	5	3	84.74	10067	3	5	4	87.53	10443	3	5	4	90.81
	700	16,000		3	13050	3	5	5	82.01	13480	3	5	5	84.72	13984	3	5	5	87.88
				5W	12671	3	5	4	79.63	13088	3	5	4	82.25	13578	3	5	4	85.33

PHOTOMETRY

PRMN-72L-700-4K7-1


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	17021
Watts	159.1
Efficacy	107.0
IES Type	I
BUG Rating	B2-U4-G2
Mounting Height	30 ft
Grid Scale	30 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	13358	78.5%
Downward House Side	2436	14.3%
Downward Total	15794	92.8%
Upward Street Side	649	3.8%
Upward House Side	578	3.4%
Upward Total	1227	7.2%
Total Flux	17021	100%

ISOFOOT CANDLE PLOT

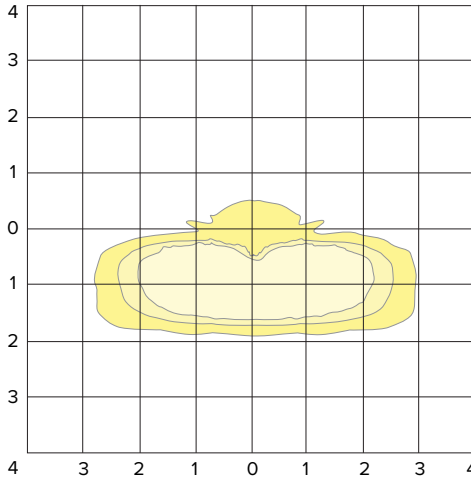

PRMN-72L-700-4K7-3


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	15825
Watts	159.12
Efficacy	99.5
IES Type	III
BUG Rating	B3-U4-G3
Mounting Height	30 ft
Grid Scale	30 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	11987	75.0%
Downward House Side	3147	19.7%
Downward Total	15134	94.7%
Upward Street Side	428	2.7%
Upward House Side	416	2.6%
Upward Total	844	5.3%
Total Flux	15979	100%

ISOFOOT CANDLE PLOT

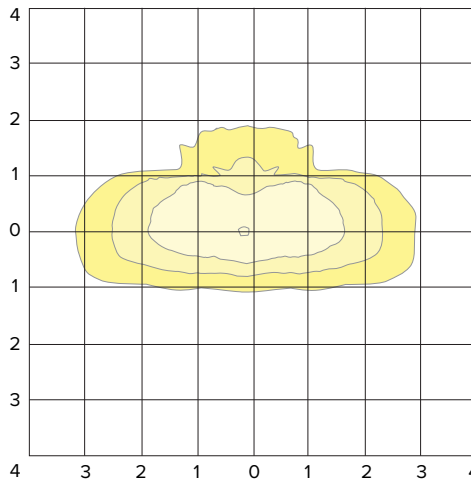

PRMN-72L-700-4K7-5Q


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	16591
Watts	159.1
Efficacy	104.3
IES Type	VS
BUG Rating	B3-U4-G2
Mounting Height	30 ft
Grid Scale	30 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	12138	76.7%
Downward House Side	2913	18.4%
Downward Total	15051	95.1%
Upward Street Side	383	2.4%
Upward House Side	391	2.5%
Upward Total	774	4.9%
Total Flux	15825	100%

ISOFOOT CANDLE PLOT

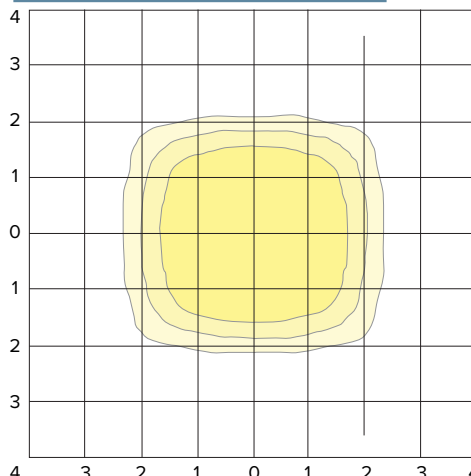

PHOTOMETRY

PRMN-72L-700-4K7-2


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	15979
Watts	159.1
Efficacy	100.4
IES Type	II
BUG Rating	B3-U4-G3
Mounting Height	30 ft
Grid Scale	30 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	12223	78.2%
Downward House Side	2763	17.7%
Downward Total	14986	95.9%
Upward Street Side	309	2.0%
Upward House Side	329	2.1%
Upward Total	638	4.1%
Total Flux	15625	100%

ISOFOOT CANDLE PLOT

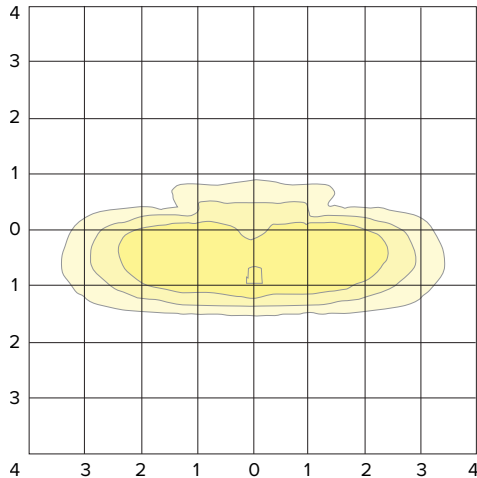

PRMN-72L-700-4K7-4


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	15625
Watts	159.1
Efficacy	98.2
IES Type	IV
BUG Rating	B3-U3-G3
Mounting Height	30 ft
Grid Scale	30 ft

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	7919	47.7%
Downward House Side	7919	47.7%
Downward Total	15838	95.5%
Upward Street Side	376	2.3%
Upward House Side	376	2.3%
Upward Total	752	4.5%
Total Flux	16591	100%

ISOFOOT CANDLE PLOT

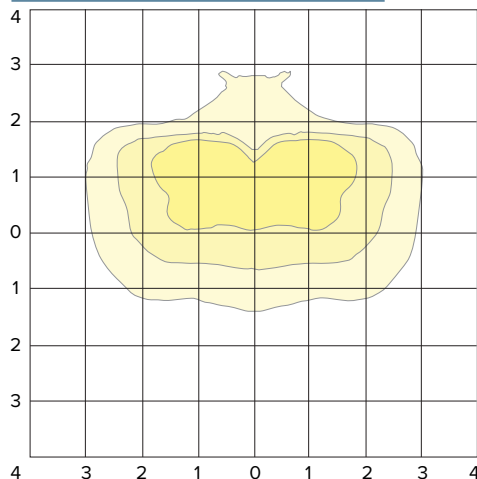

PRMN-72L-700-4K7-5W


LUMINAIRE DATA

Description	4000 Kelvin, 70CRI
Delivered Lumens	15365
Watts	159.1
Efficacy	97
IES Type	VS
BUG Rating	B4-U3-G2
Mounting Height	30 ft
Grid Scale	30 ft

ZONAL LUMEN SUMMARY


Zone	Lumens	% Luminaire
Downward Street Side	7345	47.8%
Downward House Side	7345	47.8%
Downward Total	14690	95.6%
Upward Street Side	337	2.2%
Upward House Side	337	2.2%
Upward Total	674	4.4%
Total Flux	15365	100%

ISOFOOT CANDLE PLOT

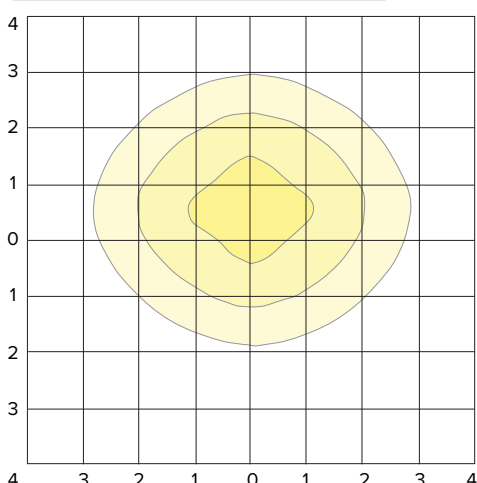

TM-30 DATA

COLOR VECTOR GRAPHIC

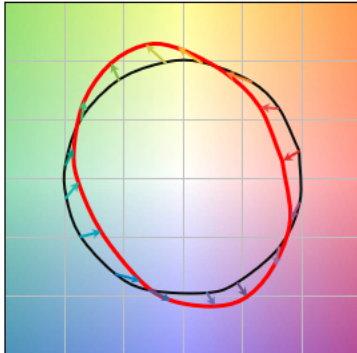

TEST SOURCE

MBM TEST RESULTS	
CCT (K)	3947
CIE Ra	72
Duv	0.0004
x	0.3831
y	0.3793
Rf	68
Rg	99

ELECTRICAL DATA

Electrical										Dimming					
Light Engine	System Watts	System Current	Line Voltage		Amps AC				Min. Power Factor	Max THD (%)	Dimming Range	Source current out of 0-10V		Absolute voltage range on 0-10V (+)	
			VAC	HZ	120	208	240	277				Min	Max	Min	Max
72L	54.8	245 mA	120-277	50/60	0.46	0.26	0.23	0.20	>0.9	20	10% to 100%	0mA	1mA	0V	10V
	76.0	335 mA			0.63	0.37	0.32	0.27							
	82.2	365 mA			0.69	0.40	0.34	0.30							
	115.0	500 mA			0.96	0.55	0.48	0.42							
	159.1	700 mA			1.33	0.76	0.66	0.57							

AMBER MULTIPLIER	
CCT	MULTIPLIER
5000K	1
AM	0.1727

2700K MULTIPLIER	
CCT	MULTIPLIER
5000K	1
2700K	0.897

LENS OPTION MULTIPLIER
DIFFUSED LENS
0.8518