

JOB \_\_\_\_\_ TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_ APPROVALS \_\_\_\_\_

### FEATURES

- Independently aimed LEAR™ modules
- 355° rotation and 70° tilt module adjustment and -5° to +5° housing adjustment
- Wide range of drive currents available
- Design software interface for user-defined Type X distribution creation
- Traditional NEMA distributions available
- IP66 sealed optical chamber

### Certifications





3000K and warmer CCTs only


### SPECIFICATIONS



Max Weight = 45 lbs.

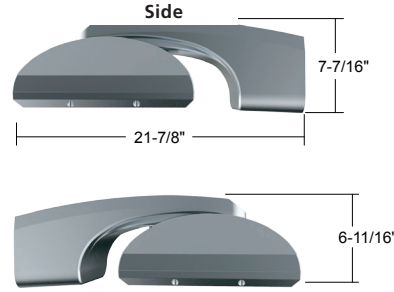

Side - EPA 1.00



Front - EPA 0.81

### ORDERING CODE

Fixture	Mount Direction	Distribution	Electrical Module	Fixture Finish	Photocell Options																												
ARWX09																																	
	D Down U Up	S Spot X <sup>1</sup> Type X  Type X IES File Name	<table border="1"> <thead> <tr> <th>Color Temperature</th> <th>Drive Current</th> <th colspan="2">Voltages</th> </tr> </thead> <tbody> <tr> <td>3K 3000K</td> <td>35 350mA</td> <td>65 650mA</td> <td>UV 120-277V</td> </tr> <tr> <td>4K 4000K</td> <td>40 400mA</td> <td>70 700mA</td> <td>347 347V</td> </tr> <tr> <td>5K 5000K</td> <td>45 450mA</td> <td>75 750mA</td> <td>480 480V</td> </tr> <tr> <td></td> <td>50 500mA</td> <td>80 800mA</td> <td></td> </tr> <tr> <td></td> <td>55 550mA</td> <td>85 850mA</td> <td></td> </tr> <tr> <td></td> <td>60 600mA</td> <td>90 900mA</td> <td></td> </tr> </tbody> </table>	Color Temperature	Drive Current	Voltages		3K 3000K	35 350mA	65 650mA	UV 120-277V	4K 4000K	40 400mA	70 700mA	347 347V	5K 5000K	45 450mA	75 750mA	480 480V		50 500mA	80 800mA			55 550mA	85 850mA			60 600mA	90 900mA		LG Light Gray BL Black DB Dark Bronze GT Graphite PS Platinum Silver TT Titanium WH White CC <sup>2</sup> Custom Color	A25-7 7-pin Photocell Receptacle A30 120V Button Photocell A31 208V Button Photocell A32 240V Button Photocell A33 277V Button Photocell A34 347V Button Photocell A35 480V Button Photocell
Color Temperature	Drive Current	Voltages																															
3K 3000K	35 350mA	65 650mA	UV 120-277V																														
4K 4000K	40 400mA	70 700mA	347 347V																														
5K 5000K	45 450mA	75 750mA	480 480V																														
	50 500mA	80 800mA																															
	55 550mA	85 850mA																															
	60 600mA	90 900mA																															

Fuse Options	NFO Option	Controls Options	Battery Backup
SF 120, 277, 347 Line Volts DF 208, 240, 480 Line Volts	NFO Neighbor Friendly Optic	WIR-RMI-IO Wireless 120-480V, 1000' range, wiSCAPE RF control system with on/off/dim, alerts, monitoring and metering capabilities  SiteSync Lighting Control SWP <sup>3,4</sup> SiteSync Wireless Pre-Commission SWPM <sup>3,4,5</sup> SiteSync Wireless Pre-Commission w/ Occupancy Sensor	EM <sup>7</sup> Integral Emergency Battery Backup
		Control Accessories SWUSB <sup>†</sup> SiteSync loaded on USB flash drive (Windows® operating system only) SWTAB <sup>†</sup> SiteSync Windows® based Tablet SWBRG <sup>†</sup> SiteSync Wireless Bridge Node WIR-RME-L wiSCAPE External Fixture Module	Motion/Occupancy Sensor SCL <sup>6</sup> Fixture Mounted Occupancy Sensor up to 16' SCH <sup>6</sup> Fixture Mounted Occupancy Sensor from 16' to 30'

For Pole Spec Select: [http://www.kimlighting.com/products/arms\\_and\\_poles/](http://www.kimlighting.com/products/arms_and_poles/)  
 For Control Spec Select: <http://trpsl.com/index.html>

† When ordering with SiteSync, one of the following interface options must be chosen and ordered separately. Each option contains the SiteSync License, GUI and Bridge Node.

<sup>1</sup> User-defined distributions must include IES# file where indicated  
<sup>2</sup> Custom colors subject to additional charges, minimum quantities and extended lead times. Consult representative.  
<sup>3</sup> Not available with other control or sensor options.  
<sup>4</sup> Specify group and zone. See SiteSync product page [www.hubbellighting.com/controls/sitesync](http://www.hubbellighting.com/controls/sitesync) for more details.  
<sup>5</sup> Specify time delay; dimming level and mounting height.  
<sup>6</sup> Only applies when mounted in down position.  
<sup>7</sup> Battery backup is rated at -40 to 85°C.

Microsoft, Encarta, MSN, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Kim Lighting reserves the right to change specifications without notice.

Color Temp Field Angle - 10% max	Photometrics (3000K)											
Drive Current	350 mA	400 mA	450 mA	500 mA	550 mA	600 mA	650 mA	700 mA	750 mA	800 mA	850 mA	900 mA
Lumens	2138	2280	2423	2516	2708	2851	2994	3136	3279	3422	3564	3707
Maximum Candela	28988	30913	32852	34113	36716	38655	40594	42519	44458	46397	48322	50261
Maximum Candela Angle H	0	0	0	0	0	0	0	0	0	0	0	0
Maximum Candela Angle V	3	3	3	3	3	3	3	3	3	3	3	3
Horizontal Beam Angle (50%)	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8
Vertical Beam Angle (50%)	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1

Color Temp Field Angle - 10% max	Photometrics (4000K)											
Drive Current	350 mA	400 mA	450 mA	500 mA	550 mA	600 mA	650 mA	700 mA	750 mA	800 mA	850 mA	900 mA
Lumens	2608	2799	2990	3112	3372	3562	3753	3944	4135	4325	4516	4707
Maximum Candela	33513	35968	38422	39217	43331	45772	48227	50681	53136	55577	58031	60900
Maximum Candela Angle H	0	0	0	0	0	0	0	0	0	0	0	0
Maximum Candela Angle V	1	1	1	1	1	1	1	1	1	1	1	1
Horizontal Beam Angle (50%)	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1
Vertical Beam Angle (50%)	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8

Color Temp Field Angle - 10% max	Photometrics (5000K)											
Drive Current	350 mA	400 mA	450 mA	500 mA	550 mA	600 mA	650 mA	700 mA	750 mA	800 mA	850 mA	900 mA
Lumens	2834	3023	3212	3335	3590	3779	3968	4158	4347	4536	4725	4914
Maximum Candela	38600	41175	43749	46929	48898	51472	54046	56634	59208	61783	64357	68429
Maximum Candela Angle H	0	0	0	0	0	0	0	0	0	0	0	0
Maximum Candela Angle V	3	3	3	3	3	3	3	3	3	3	3	3
Horizontal Beam Angle (50%)	11	11	11	10.7	11	11	11	11	11	11	11	10.8
Vertical Beam Angle (50%)	14	14	14	14	14	14	14	14	14	14	14	14.1

Optical System	Electrical										Dimming						
	Current	System Watts	Line Voltage		Amps AC						Min. Power Factor	Max THD (%)	Dimming Range	Source current out of 0-10V purple wire		Absolute voltage range on 0-10V (+) purple wire	
			VAC	Hz	120	208	240	277	347	480				Min	Max	Min	Max
LEAR™	350 mA	34	120-480	50/60	0.28	0.16	0.14	0.12	0.10	0.07	>0.9	20	10% to 100%	0mA	1mA	0V	10V
	400 mA	38			0.32	0.18	0.16	0.14	0.11	0.08							
	450 mA	43			0.36	0.21	0.18	0.16	0.12	0.09							
	500 mA	48			0.40	0.23	0.20	0.17	0.14	0.10							
	550 mA	53			0.44	0.25	0.22	0.19	0.15	0.11							
	600 mA	58			0.48	0.28	0.24	0.21	0.17	0.12							
	650 mA	62			0.52	0.30	0.26	0.23	0.18	0.13							
	700 mA	67			0.56	0.32	0.28	0.24	0.19	0.14							
	750 mA	72			0.60	0.35	0.30	0.26	0.21	0.15							
	800 mA	77			0.64	0.37	0.32	0.28	0.22	0.16							
	850 mA	82			0.68	0.39	0.34	0.29	0.24	0.17							
900 mA	86	0.72	0.42	0.36	0.31	0.25	0.18										

**TM-21 LIFETIME CALCULATION\***

Optical System	Ambient Environment °C	Projected Lumen Maintenance			Reported L70
		16	26	TM-21 48	
LEAR™	25	91.20%	85.70%	74.87%	> 48,000 hrs

\*Projected lifetime from 700mA LM-80 data.

**LED COLOR**

	Spectroradiometric		
	3K	4K	5K
Designation	3000K	4000K	5000K
CRI Minimum	≥72	≥72	≥72
S/P Ratio	1.33	1.66	1.78

*Kim Lighting reserves the right to change specifications without notice.* Consult factory for Amber, Turtle Friendly, Gulf Coast and Observatory applications.

### SPECIFICATIONS

#### Housing:

- Low copper aluminum alloy die-casting designed as one-piece with external cooling ribs.
- Solid cast aluminum walls between the housing and arm create a thermal barrier between the optical and electrical compartments.
- Molded silicone gaskets throughout to insure sealing between the two compartments and ingress protection.
- Housing designed with integral Type X thermal transfer "turrets" utilized for both thermal transfer and to secure location of the LEAR™ Optical Module. The turrets are spaced in rows of 3 X 3, designed to optimize photometric performance for standard and Type X user-defined distributions.
- Tempered UV coated flat lens for low glare.
- IK09 rated enclosure protects electrical equipment against external mechanical impacts.

#### Lens Frame:

- One-piece, die-cast, low copper aluminum alloy secured to housing with eight captive, tamper-resistant stainless steel fasteners.
- Molded silicone gasket assembles into a cast channel in the doorframe sealing the 3/16" thick low iron-content, tempered glass lens against the housing upon closure.
- IP66 certified to protect the interior components from dust and water ingress.

#### Type X LEAR™ Optical Module:


- Turret alignment and thermal transfer design allow for freedom of adjustability and precision of the LEAR LED array.
- Optimized standard distribution or user-defined beam patterns.
- 3000K, 4000K, 5000K standard CCT. Amber and other custom color temperatures available.
- Factory adjusted distributions created from user-defined IES files.
- Toolless 355° rotation adjustment and 70° tilt adjustment with a tamper resistant fastener.
- Type X LEAR modules are IP66 rated and utilize six high output LEDs, positioned beneath a precision, high purity molded acrylic prism.
- Targeted optics minimize pixilation concerns to provide outstanding performance, uniformity and glare control.

#### Electrical Components:

- Standard programmable driver for variable drive current settings from 350mA to 900mA.
- Electrical components are located in the arm. Molded silicon gasket seal to isolate arm from the optical chamber.
- Maximum lightning surge current 20KA with thermally protected varistor technology. Surge suppression is series circuited preventing total fixture failure.
- Open circuit fault will turn off the luminaire protecting the sensitive electronics and acting as a signal for maintenance.
- Programmable Driver is rated for -40°F starting.
- "Thermal Shield" Primary Side thermister Protection for sustainable life of LEAR modules and electronic components.

#### Dimming:

- Dimming range from 10% to 100% by the use of its standard 0-10V interface on the programmable driver.
- Modular wiring harness in the service area provided for user access to the dimming circuitry.
- Dimming circuitry compatible with 0-10V user-defined control devices.
- Optional factory programmed dimming profile.



#### Arm:

- Low copper aluminum alloy, two piece die-casting designed and gasketed to function as one-piece.
- External cooling ribs create continuous aesthetic and thermal path.
- Molded silicone gasket seals the wiring channel separating the arm from the housing thermally insulating the electronic components.
- Main power quick-disconnect provided between the die-cast speed mount bracket and the fixture housing. Quick-disconnect plugs are glass-filled thermoplastic assemblies attached to the die-castings, self-aligning, and rated for 10,000 matings. Male portion of the plug is mounted to die-cast speed mount with wires supplied for incoming power connection.

Female portion is mounted to the fixture with wires terminating in a quick-disconnect plug for attachment to the driver assembly. Power to the electrical components is immediately disconnected when fixture is removed from speed mount.

- Luminaire housing adjustable -5° to +5° via locking fastener under the arm cover.

#### Finish:

- Fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat.
- Standard colors include (BL) Black, (DB) Dark Bronze, (GT) Graphite, (PS) Platinum Silver, (LG) Light Gray, (TT) Titanium, (WH) White, and (CC) Custom Color (Include RAL#).

#### Fuse Options:

**SF** for 120, 277 and 347 Line Volts  
**DF** for 208, 240 and 480 Line Volts.

- High temperature fuse holders factory installed inside the fixture arm. Fuse is included.

#### Certifications and Listings:

- UL 1598 Standard for Luminaires.
- UL 8750 Standard for Safety for Light Emitting Diode (LED) Equipment for use in Lighting Products.
- CSA C22.2#250.0 Luminaires.
- ANSI C136.31-2010 3G Vibration tested and compliant.
- RoHS compliant.
- IP66 certified.
- IEC 66262 Mechanical Impact Code IK09.
- IDA approved, 3000K and warmer CCTs only.

#### CAUTION:

- Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

#### WARRANTY:

- For full warranty see: <http://www.hubbellighting.com/resources/warranty>

Kim Lighting reserves the right to change specifications without notice.

### CONTROLS


#### Photocell Receptacle

##### A25-7

Fully gasketed and wired 7-pin receptacle. Easy access location above the electrical compartment. 7-pin construction allows user-defined interface and control definition of operational performance. ANSI twist-lock control module by-others.

Standard customer operation modes:

1. (Black and Red leads) Traditional on/off photoelectric control.
2. (Gray and Purple leads) 0-10V dimming, 5-pin wireless photoelectric control for added dimming feature.
3. (Brown and Orange leads) 10V 7-pin wireless photoelectric control for dimming and additional I/O connections for customer use.

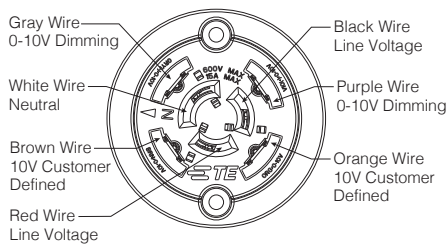

#### Button Photocell

**A30** for 120V, **A31** for 208V, **A32** for 240V, **A33** for 277V, **A35** for 347V, **A34** for 480V,

Factory installed photocell inside housing with a fully gasketed sensor on the side wall. For multiple fixture mountings, one fixture is supplied with a photocell to operate the others.

#### Wireless Controls

##### wiSCAPE™

Hubbell Control Solution's wiSCAPE™ wireless control modules allow an individual fixture to be managed, monitored and measured. The modules communicate securely over a robust certified meshed radio signal. The wiSCAPE modules provide on/off/dim control, external device input, alerts and metering.

##### WIR-RMI-IO

wiSCAPE Internal Module, 120-480V, 1000ft range (LOS), 3 Digital Inputs/1 Analog Input, 2 Outputs.

##### WIR-RME-L

wiSCAPE External Module, 120-480V, 1000ft range (LOS), Internal Photocell, 1 Digital Input, Compatible with the A-25-7H option.

#### SiteSync™<sup>1</sup>

SiteSync™ wireless control system for reduction in energy and maintenance cost while optimizing light quality 24/7. See ordering information or visit [www.hubbellighting.com/products/sitesync](http://www.hubbellighting.com/products/sitesync) for more details.

#### Fixture Mounted Occupancy Sensor up to 16'

##### SCL

Fixture Mounted Occupancy Sensor up to 16' - Outdoor occupancy sensor with 0-10V interface dimming control mounts directly to fixture. Wide 360° pattern. Module colors available Black, Gray, and White.

Ordering Example: SCL/277<sup>2</sup>/BL<sup>3</sup>

#### Fixture Mounted Occupancy

##### Sensor 16' to 30'

##### SCH

Fixture Mounted Occupancy Sensor 16' to 30' - Outdoor occupancy sensor with 0-10V interface dimming control mounts directly to fixture. Wide 360° pattern. Module colors available Black, Gray, and White.

Ordering Example: SCH/277<sup>2</sup>/BL<sup>3</sup>

Kim Lighting reserves the right to change specifications without notice.

<sup>1</sup>PRECOMMISSIONED SITESYNC ORDERING INFORMATION: When ordering a fixture with the SiteSync lighting control option, additional information will be required to complete the order. The SiteSync Commissioning Form or alternate schedule information must be completed. This form includes Project location, Group information, and Operating schedules. For more detailed information please visit [www.HubbellLighting.com/products/sitesync](http://www.HubbellLighting.com/products/sitesync) or contact Hubbell Lighting tech support at (800) 345-4928.

SiteSync fixtures with occupancy sensor (SWPM) require the mounting height of the fixture for selection of the lens.

Examples:

SiteSync only : ARWX25/1/3K35UV/PS/US/SWP

SiteSync with Motion Control: ARWX25/1/3K35UV/PS/US/SWPM-20F

MOB ORDERING INFORMATION: When ordering a fixture with a dimming occupancy sensor option (MOB), please specify the appropriate information. These settings are specified in the ordering as shown in the example below.

ARX25/1/3k35UV/PS/US/MOB - 1 to 30 min - 33% or 50% - ?? / DBT  
High to Dim Delay      Low Level      Mounting Height (ft.)

<sup>2</sup>Voltage, <sup>3</sup>Color