

Type:
Job:
Ordering Example:

2B / BE17H3 / 150PMH277 / LG-P / HA02S-TM1

Mtg. Fixture Elec Module Finish Option

Ordering Information

Always refer to the specific luminaire catalog, and the ordering information page within that catalog. Place the optional Heritage Arm catalog number as an "Option" following the Fixture catalog numbers.

Approvals:


Date:
Page: 1 of 3

Specifications

HA02L

Large Arm

for Kim RA25, AE21, BE21, and LET26 fixtures only.

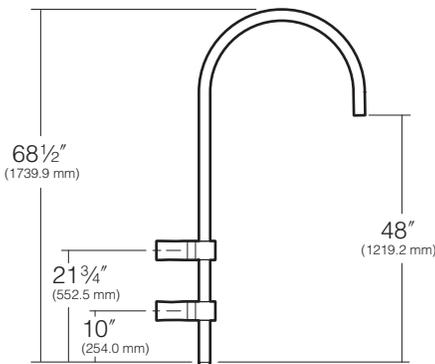


Available for 4", 5", and 6" O.D. pole tops

HA02S

Small Arm

for Kim RA17, AE17, BE17, and LET19 fixtures only.

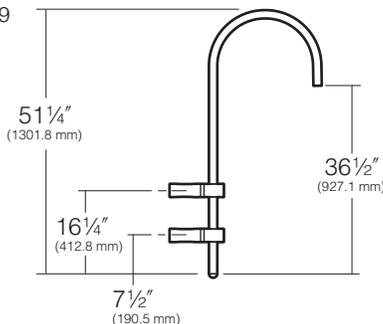

Available for 3.4", 4", 5", and 6" O.D. pole tops

Arm: One-piece, extruded aluminum, side-mounted crook arm with cast aluminum covers. Crook Arm is secured to the pole with $\frac{3}{8}$ " stainless steel rods, nuts, and washers. Stainless steel rods thread into a pole backing plate located inside the pole. Pole backing plate is heavy gauge zinc plated steel, and includes a wire strain relief and grounding connection. Stainless Steel bolts secure 2-piece decorative covers to pole adaptor. Arm-to-luminaire attachment is by concealed stainless steel rods, nuts, and washers, projecting into the crook arm to secure the mounting. Small arm utilizes $\frac{3}{8}$ " studs and large arm utilizes $\frac{1}{2}$ " studs.

Finish: TGIC thermoset polyester powder coat paint, 2.5 mil nominal thickness. Arm color is always provided to match the selected pole and luminaire color.

Optional Finial not available.

Optional Wall Mount: (See page 3)

Optional Tenon Mount: (See page 3)

NOTES:

- 1) Refer to page **75** of Arms and Poles Selection Guide for wind map and application information.
- 2) Refer to pages **78** and **79** of Arms and Poles Selection Guide for luminaire Optical Centerline Matrix.
- 3) A regularly scheduled maintenance program must be established to insure paint coating is intact, corrosion or structural damage has not occurred, and all mounting rods, nuts and bolts are tight. Failure to do so could lead to damage or serious personal injury.



HUBBELL LIGHTING, INC.

U.S. PATENTS D568,531 AND D568,532

Type:
Job:

Page: 2 of 3

Standard Features

ERA® Arm	Arm/Fixture	Mounting Configuration					
HA02		Plan View:					
		Cat. No.:	1A	2B	3Y	4C	1W
		EPA:					
			1.9	3.8	5.1	5.9	n/a
	HA02L - RA25	1.8	3.6	4.8	5.5	n/a	
	HA02L - AE21/BE21	2.0	4.0	5.2	6.0	n/a	
	HA02L - LET26						
	Small						
	HA02S - RA17	1.3	2.6	3.5	3.9	n/a	
	HA02S - AE17/BE17	1.2	2.4	3.2	3.6	n/a	
	HA02S - LET19	1.5	3.0	4.0	4.5	n/a	

Type:

Job:

Page: 3 of 3

Optional Features


Wall Mounting

Cat. No. **1W**

Select from Mounting on page **2**.


A cast mounting plate of aluminum is mounted to the wall with bolts (by others). Fixture and arm are mounted to a cast aluminum cover plate before attaching to the wall mounting plate. The fixture-arm-cover plate assembly is hooked to the wall mounting plate, and secured with stainless steel screws provided. After mounting to the wall, field splices are made at the opening in the cover plate, then covered by a cast aluminum plate that blends with the cover plate design. Complete fixture-arm-cover plate assembly can therefore be mounted before field splices are made. Cover plate is finished to match arm and fixture powder coat color.

CAUTION: Structural integrity of mounting plate attachment to wall is by others.

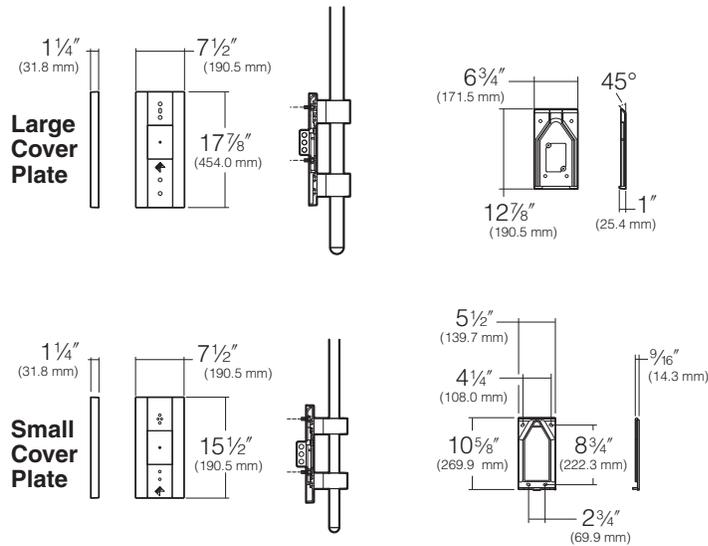

Tenon Mount

(Poles by others)

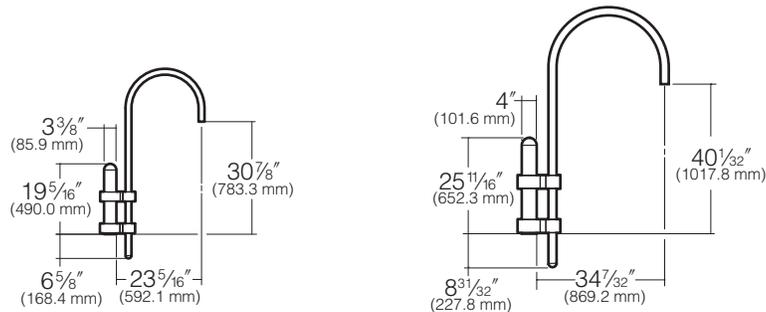

NOTE: All small arm assemblies require a steel 2" pipe tenon (2 3/8" O.D.) x 4" long.

All large arm assemblies require a steel 2 1/2" pipe tenon (2 7/8" O.D.) x 4" long.

Side Pole Crook - Small

Cat. No.	Mounting
HA02S-TM1	1A
HA02S-TM2	2B
HA02S-TM3	3Y
HA02S-TM4	4C

Side Pole Crook - Large

Cat. No.	Mounting
HA02L-TM1	1A
HA02L-TM2	2B
HA02L-TM3	3Y
HA02L-TM4	4C