

4" Square Downlight LF4SQML LENS

120V - 277V
0-10V Dimming

APPLICATIONS:

LiteFrame LF4SQML is a 4" specification grade LED lensed downlight that utilizes high efficiency LEDs to obtain color consistency, energy savings, and low maintenance costs. 50,000 hours minimum life up to 35°C (95°F) in open plenum applications.

HOUSING:

One-piece 22 gauge non-corrosive steel platform. Pre-wired j-box with snap-on cover for easy access. Snap-in connection from driver compartment allows easy installation of light engine/trim assembly without tools above or below the ceiling and can be upgraded to accommodate technology improvements. Approved for 8 (4 in/4 out) No. 12 AWG conductors rated for 90°C through wiring.

REFLECTOR:

Self-trim standard with a regressed clear, prismatic, or diffused lens. Painted white self-trim (WT) available as option. Reflector is made from anodized AlanoD Miro 4 aluminum.

LED LIGHT ENGINE:

The LF4SQML uses the Philips Fortimo DLM LED Module. This module provides controlled color consistency (3 SDCM) from fixture to fixture. The system is designed for optional life and lumen maintenance (>50,000 hours at 70% lumen maintenance). Both reflector and light engine assembly are mechanically retained to housing.

LED DRIVER:

The LF4SQML utilizes the Philips Fortimo LED Driver specifically designed to optimize efficiency of the

Fortimo DLM Module. Driver is designed to match the 50,000 hour minimum life expectancy of the system. Meets UL Class 2, inherent short circuit protection, self limited, overload protected. If critical temperatures are reached on driver or LED module, integrated thermal feedback loop will gradually reduce current to protect system life. Driver is universal 120V-277V. Optional Lutron Series A driver is also available.

DIMMING:

Comes standard with 0-10V dimming capability. Flicker-free dimming to 10%. 0-10V control may consume up to 1mA. 0-10V, Lutron 2 wire and EcoSystem dimming available to 1% and DMX with RDM (remote device management) dimming to less than 0.1%.

INSTALLATION:

Adjustable Bar hangers included (not with CP option). Universal adjustable mounting brackets also accept 1/2" EMT conduit or 1 1/2" or 3/4" lathing channel (by others) or Prescolite 24" bar hangers (B24 or B6). Housing provides up to 6° rotational adjustment of the square trim.

CERTIFICATIONS:

CSA certified to US and Canadian safety standards. Suitable for wet locations. Approved for through wiring. Non-IC rated.

WARRANTY:

5 year warranty. See www.prescolite.com for details.



DATE: _____ TYPE: _____

FIRM NAME: _____

PROJECT: _____

LiteFrame®

Ceiling Cutout: 5-1/4" x 5-1/4"
Maximum Ceiling Thickness 1 1/4"
For conversion to millimeters,
multiply inches by 25.4
Not to Scale

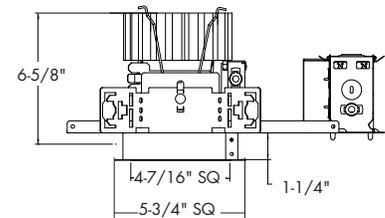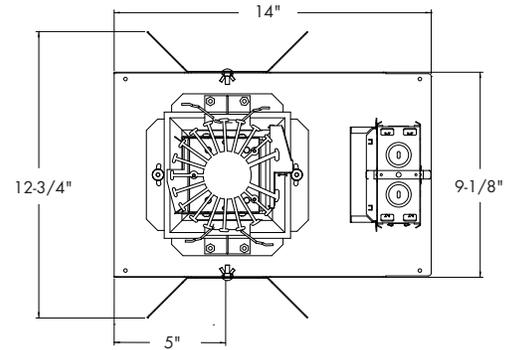

See page 4 for CP
and NX(W)E line art.

CATALOG NUMBER:

EXAMPLE: LF4SQML-4SQML30L30K8PL

Order housing, reflector, and accessories separately

HOUSING	DRIVER OPTIONS	VOLTAGE OPTION	HOUSING OPTIONS	TRIM APERTURE	KELVIN	REF. COLOR OPTIONS	TRIM OPTIONS	LENS	ACCESSORIES	
<input type="checkbox"/> LF4SQML Medium Lumen 0-10V 10% dimming 120V-277V	Standard 0-10V 10% Dimming <input type="checkbox"/> DM1 ¹ 0-10V dimming at 1% <input type="checkbox"/> EDM ^{3,4} Hi-Lume 1% EcoSystem LED Driver <input type="checkbox"/> 2DM ^{3,4} Hi-Lume 1% 2-wire LED Driver (120V only) <input type="checkbox"/> DMX ^{3,4} DMX with RDM dimming to <0.1%	Standard 120V-277V <input type="checkbox"/> 120 120V <input type="checkbox"/> 277 277V <input type="checkbox"/> 347 347V	<input type="checkbox"/> CP ^{3,5,8,9,10} Chicago Plenum <input type="checkbox"/> LV ⁶ Lutron Vive Enabled, 0-10V, 120-277V <input type="checkbox"/> LVE (EDM Only) Lutron Vive Enabled, EcoSystem <input type="checkbox"/> NXWE ^{7,8,9,10} NX Wireless Enabled <input type="checkbox"/> NXE ^{7,8,9,10} NX Enabled, Dual SmartPorts <input type="checkbox"/> EMR ³ Emergency Battery Pack with remote test switch and indicator light	<input type="checkbox"/> 4SQML30L Semi-Diffuse Clear Alzak Reflector with 3000 Lumen Module	<input type="checkbox"/> 27K 2700 Kelvin <input type="checkbox"/> 30K 3000 Kelvin <input type="checkbox"/> 35K 3500 Kelvin <input type="checkbox"/> 40K 4000 Kelvin <input type="checkbox"/> 50K 5000 Kelvin	Standard Clear Alzak <input type="checkbox"/> CG Champagne Gold Alzak <input type="checkbox"/> BL Black Alzak <input type="checkbox"/> WE Wheat Alzak <input type="checkbox"/> LW Light Wheat Alzak <input type="checkbox"/> PW Pewter Alzak <input type="checkbox"/> WH Painted Matte White Reflector and Flange <input type="checkbox"/> BC Painted Black Reflector and Flange	<input type="checkbox"/> WT Painted White Flange only <input type="checkbox"/> DL Regressed Diffuse Lens <input type="checkbox"/> PL Regressed Prismatic Lens	<input type="checkbox"/> B24 ⁵ Set of two 24" bar hangers for T-bar ceilings <input type="checkbox"/> B6 ⁵ Set of two (2) bar hangers for ceiling joist up to 24" centers <input type="checkbox"/> LiteGear ² Inverter, single phase central lighting, 125VA-250VA <input type="checkbox"/> LPS Series ² LitePower micro- inverter, 20VA-55VA		
					CRI					
					<input type="checkbox"/> 8 80+ CRI					
					<input type="checkbox"/> 9 90+ CRI					

- Notes:**
- 1 For DM1, do not specify a voltage if 120 or 277
 - 2 See Central Inverter compatibility note and web links on page 2
 - 3 Not available with 347V
 - 4 Voltage must be specified with EDM, 2DM or DMX
 - 5 Accessories should be selected with CP if required
 - 6 LV requires standard dimming or DM1
 - 7 Not available with CP option
 - 8 Not available with EDM, 2DM or DMX
 - 9 Not available with LV or LVE
 - 10 Not available with EMR

PHOTOMETRIC DATA

LifeFrame - 4" LF4SQML Lens

DRIVER DATA	4SQML30L
Input Voltage	120V-277V
Input Frequency	60 Hz
Input Current	0.269A (120V) 0.117A (277V)
Input Power	32.3W
Power Factor	≥0.90
THD	<20%
EMI Filtering	FCC 47CFR Part 15, Class A
Operating Temperature	-20°C to 35°C
Dimming	0-10V
Over-voltage, over-current, short-circuit protected	
*Power consumption and photometric output may vary slightly with various driver and CRI options	

Lumen Multiplier Table

Photometrics published below are for the 3000K, 80 CRI. This table may be used to approximate the lumen values at different Kelvin temperatures and CRI.

4000 Kelvin	1.07
3500 Kelvin	1.00
3000 Kelvin	1.00
2700 Kelvin	0.95
80 CRI.....	1.00
90 CRI.....	0.91


Delivered Lumens

The table below shows the delivered lumens for the various lumen outputs.

Output	CRI	Lens	Delivered Lumens	Input Watts	Lumens Per Watt	Full Catalog String
30L	80	CL	2813	32.3	87	LF4SQML-4SQML30L30K8CL
30L	80	DL	2356	32.3	73	LF4SQML-4SQML30L30K8DL
30L	80	PL	2486	32.3	77	LF4SQML-4SQML30L30K8PL

LF4SQML-4SQML30L30K8CL

LED Light Engine: 3000K, 80 CRI
System Wattage: 32.3W
Fixture Delivered Lumens: 2813
Fixture Efficacy: 87
Spacing Criteria: 1.4

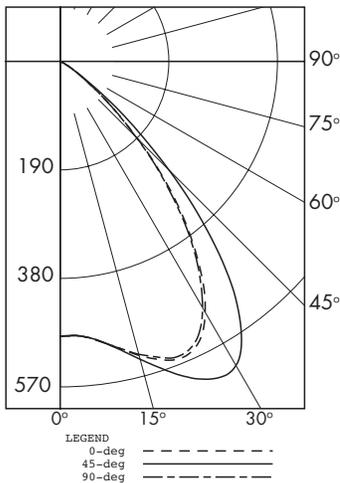

CANDELA DISTRIBUTION

DEG	0°	45°	90°
0	1357	1357	1357
5	1366	1366	1366
15	1504	1524	1498
25	1566	1732	1549
35	1176	1543	1160
45	539	759	530
55	118	133	121
65	14	17	14
75	3	6	3
85	0	0	0
90	0	0	0

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LUMINAIRE
0-30	1314	46.7
0-40	2145	76.2
0-60	2789	99.1%
0-90	2814	100.0%
90-180	0	0.0
0-180	2814	100.0

COEFFICIENTS OF UTILIZATION ZONAL CAVITY METHOD

Room Cavity Ratio	% Effective Ceiling Cavity Reflectance																
	80				50				30				10				
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	94	93	
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76
4	92	83	77	72	90	82	76	71	80	75	70	78	73	69	76	72	69
5	86	76	69	64	85	75	69	64	73	68	63	72	67	63	70	66	62
6	81	70	63	58	79	69	62	58	68	62	57	66	61	57	65	60	56
7	76	65	57	52	74	64	57	52	62	56	52	61	56	52	60	55	51
8	71	60	52	48	70	59	52	47	58	52	47	57	51	47	56	51	47
9	67	55	48	43	65	55	48	43	54	47	43	53	47	43	52	47	43
10	63	51	44	40	62	51	44	40	50	44	40	49	43	39	48	43	39

LF4SQML-4SQML30L30K8CL

Test No. 18.00409-01

Test No. 18.00409-01

Tested at 25°C Ambient in accordance to IESNA LM-79-2008




Web: www.prescolite.com • Tech Support: (888) 777-4832
701 Millennium Boulevard • Greenville, SC 29607 U.S.A. • Phone (864) 678-1000
Copyright ©2018 Prescolite, Inc., a division of Hubbell Lighting, Inc. All Rights Reserved
Specifications subject to change without notice. • Printed in U.S.A. • LFR-LED-052 • 3/2/18



PHOTOMETRIC DATA

LifeFrame - 4" LF4SQML Lens

LF4SQML-4SQML30L30K8DL
 LED Light Engine: 3000K, 80 CRI
 System Wattage: 32.3W
 Fixture Delivered Lumens: 2356
 Fixture Efficacy: 73
 Spacing Criteria: 1.3

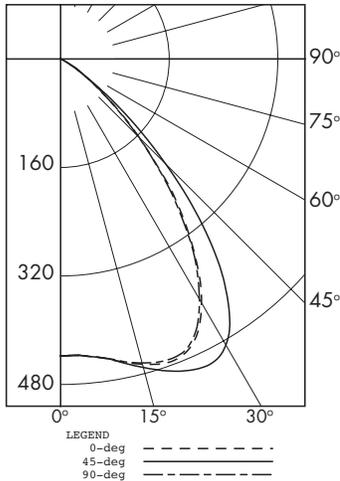

CANDELA DISTRIBUTION				
DEG	0°	45°	90°	
0	1236	1236	1236	
5	1241	1241	1241	
15	1315	1329	1309	
25	1303	1413	1292	
35	959	1208	951	
45	463	618	457	
55	127	130	124	
65	14	14	14	
75	3	3	3	
85	0	0	0	
90	0	0	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LUMINAIRE
0-30	1113	47.3
0-40	1777	75.5
0-60	2331	99.0
0-90	2355	100.0
90-180	0	0.0
0-180	2355	100.0

COEFFICIENTS OF UTILIZATION ZONAL CAVITY METHOD


Room Cavity Ratio	% Effective Ceiling Cavity Reflectance																
	80				70				50				30				
	20% Effective Floor Cavity Reflectance																
	% Wall Reflectance																
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93
2	106	100	95	91	103	98	94	90	95	91	88	82	89	86	89	86	84
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76
4	92	83	77	72	90	82	76	71	80	74	70	78	73	69	76	72	69
5	86	76	69	64	85	75	69	64	73	68	63	72	67	63	70	66	62
6	81	70	63	58	79	69	63	58	68	62	57	66	61	57	65	60	56
7	76	65	57	52	74	64	57	52	62	56	52	61	56	52	60	55	51
8	71	60	53	48	70	59	52	46	58	52	47	57	51	47	56	51	47
9	67	55	48	44	65	55	48	44	54	48	43	53	47	43	52	47	43
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40

LF4SQML-4SQML30L30K8DL Test No. 18.00410-01

Test No. 18.00410-01

Tested at 25°C Ambient in accordance to IESNA LM-79-2008

LF4SQML-4SQML30L30K8PL
 LED Light Engine: 3000K, 80 CRI
 System Wattage: 32.3W
 Fixture Delivered Lumens: 2486
 Fixture Efficacy: 77
 Spacing Criteria: 1.2

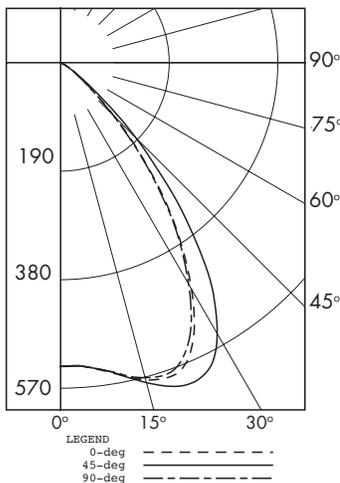

CANDELA DISTRIBUTION				
DEG	0°	45°	90°	
0	1501	1501	1501	
5	1509	1509	1509	
15	1622	1636	1611	
25	1538	1693	1504	
35	990	1270	979	
45	375	528	364	
55	93	87	87	
65	8	11	8	
75	3	3	3	
85	0	0	0	
90	0	0	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LUMINAIRE
0-30	1334	53.7
0-40	2021	81.3
0-60	2467	99.2
0-90	2486	100.0
90-180	0	0.0
0-180	2486	100.0

COEFFICIENTS OF UTILIZATION ZONAL CAVITY METHOD

Room Cavity Ratio	% Effective Ceiling Cavity Reflectance																
	80				70				50				30				
	20% Effective Floor Cavity Reflectance																
	% Wall Reflectance																
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	87	85
3	100	92	87	82	98	91	86	82	88	84	80	86	82	79	84	80	78
4	94	85	79	74	92	84	78	73	82	77	73	80	75	72	78	74	71
5	88	78	72	67	86	77	71	67	76	70	66	74	69	65	72	68	65
6	83	72	66	61	81	72	65	60	70	64	60	69	63	60	67	63	59
7	78	67	60	55	76	66	60	55	65	59	55	64	59	55	63	58	54
8	73	62	55	51	72	62	55	51	61	55	50	59	54	50	58	54	50
9	69	58	51	47	68	57	51	47	56	51	47	56	50	46	55	50	46
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43

LF4SQML-4SQML30L30K8PL Test No. 18.00411-01

Test No. 18.00411-01

Tested at 25°C Ambient in accordance to IESNA LM-79-2008



Web: www.prescolite.com • Tech Support: (888) 777-4832
 701 Millennium Boulevard • Greenville, SC 29607 U.S.A. • Phone (864) 678-1000
 Copyright ©2018 Prescolite, Inc., a division of Hubbell Lighting, Inc. All Rights Reserved
 Specifications subject to change without notice. • Printed in U.S.A. • LFR-LED-052 • 3/2/18



Dimming Compatibility Table

Dimming Ballast	Manufacturer	Web Link
DM/DM1	Lutron DTV	http://bit.ly/11jSvZg
DM/DM1	Leviton AWRMG-7xx, AWSMG-7xx, AWSMT-7xx	http://bit.ly/1BJn2R9
EDM	Lutron	http://bit.ly/1vjjHAL
2DM	Lutron	http://bit.ly/1S4WjXK

DMX

See instruction sheet on www.prescolite.com for connection & installation information.

Other useful links: <http://www.eldoled.com/led-drivers/powerdrive/50-watt/ac-561s/>

Central Inverters

For full fixture output in back-up mode, we recommend you visit www.dual-lite.com for your Central Lighting Inverter options. Please contact your local Hubbell representative for any assistance with proper sizing and loading of your inverter selection. Central lighting inverters must be ordered separately.

LiteGear: www.dual-lite.com/products/litegear_lg_series


LPS Series: www.dual-lite.com/products/lps

NX Distributed Intelligence: **NX** DISTRIBUTED INTELLIGENCE


Supports indoor and outdoor applications, wired, wireless and hybrid networked NX lighting control deployments and enables emerging applications such as Hubbell Lighting's SpectraSync™ color tuning technology.

See separate [NX™ Solutions Guide](#) for additional details.

See Hubbell Controls Solution [NX Brochure](#).

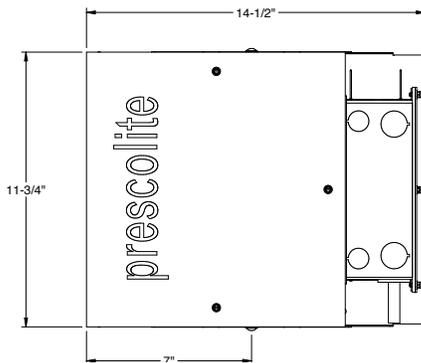

LF4SQML CP

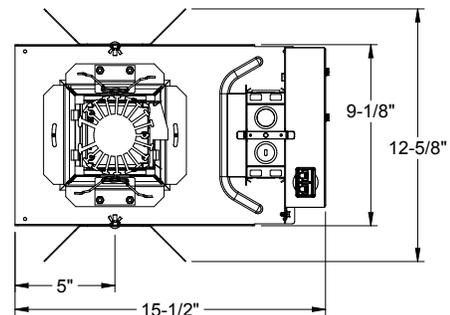

LF4SQML LENS NX(W)E

