

## FEATURES

- Baked white enamel finish, painted after fabrication
- Standard T8 fluorescent design
- Diffuser easily removable for lamp access and cleaning
- Heavy gauge steel housing
- Optional rocker switch and grounded convenience outlet 120V only
- Suitable for Damp Locations

## PROJECT INFORMATION

Project Name \_\_\_\_\_

Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Date \_\_\_\_\_

## FINISH

Painted parts are treated with a five stage phosphate bonding process and finished with a high reflectance baked white enamel.

## CERTIFICATION

All luminaires are built to ANSI C8 standards and are appropriately labeled with ENEC, A labels. Ballast location labeling is standard.

## BALLASTS

Energy efficient, thermally protected, automatic resetting, Class P, high power factor, soft started A, magnetic or electronic ballasts. CEE Mark Premium compliant.

## ELECTRICAL

Standard class "P", thermally protected, autoresetting HPF ballast, sound rated A, CEE, ENEC Premium compliant ballast less than 60dB, minimum of 6" through access location, compliant ballast disconnect standard.

## ORDERING INFORMATION

EXAMPLE UC36-125-E120-GCO


| UC              |             |         |                     | U                                           |             |                                             |  |
|-----------------|-------------|---------|---------------------|---------------------------------------------|-------------|---------------------------------------------|--|
| MODEL           | SIZE        | WATTAGE | LAMP TYPE           | BALLAST                                     | VOLTAGE     | OPTIONS                                     |  |
| UC Undercabinet | 24 24" long | 17 17W  | 17 24", T8: 17 Watt | E Electronic T8, Instant Start              | U 120V-277V | F835 35K, 78+CRI, T8 Lamps Installed        |  |
|                 | 36 36" long | 25 25W  | 25 36", T8: 25 Watt | EHL Electronic T8, Instant Start High Lumen | 120 120V    | WSW On-Off Rocker Switch (120V only)        |  |
|                 | 48 48" long | 32 32W  | 32 48", T8: 32 Watt | ELW Electronic T8, Instant Start Low Watt   |             | GCO Grounded Convenience Outlet (120V only) |  |
|                 |             |         |                     | ED Electronic T8, Full Dimming              |             | GLR Fast Blow Fuse                          |  |
|                 |             |         |                     | EP Electronic T8, Program Start             |             |                                             |  |
|                 |             |         |                     | EPLW Electronic T8, Program Start Low Watt  |             |                                             |  |

**PHOTOMETRIC DATA**

24" 17 Watt T8 Lamp




36" 25 Watt T8 Lamp

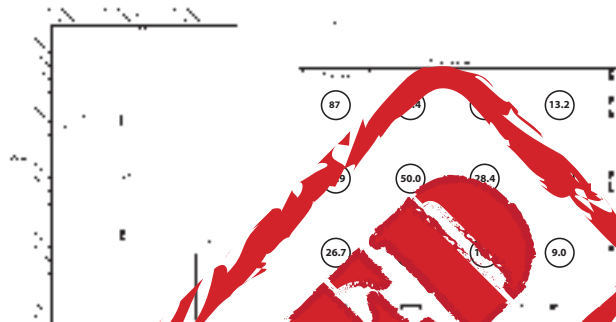

48" 32 Watt T8 Lamp



**DIMENSIONAL DATA**

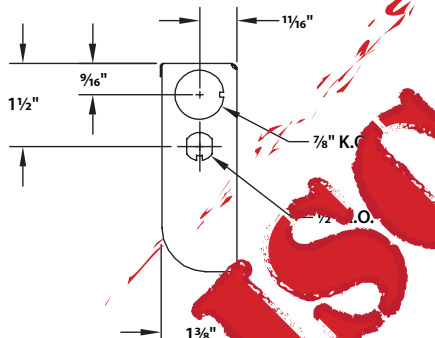

**NOTE:** All dimensions are in inches. Dimensions are subject to change without notice. For construction factory or check sample for verification.

