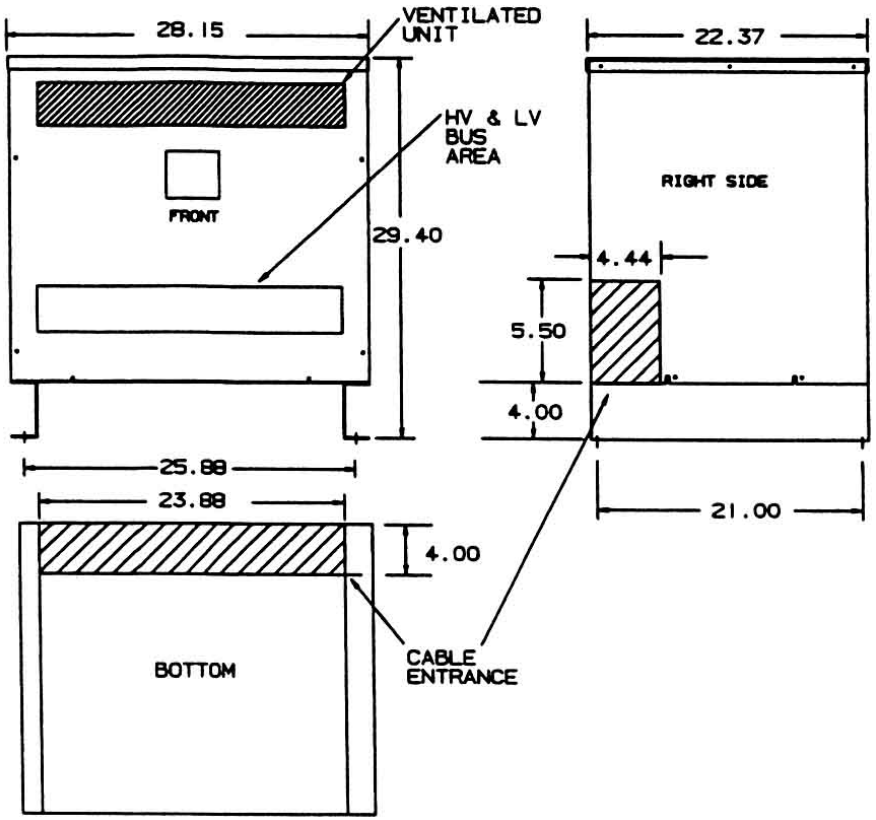

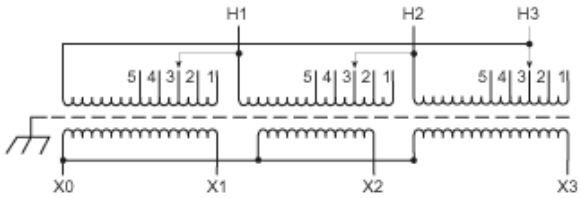

Primary Volts	%	Connect Leads to Tap No.
242	105	1
236	102.5	2
230	100	3
224	97.5	4
219	95	5
Secondary Volts		
230		X1, X2, X3
133 1 phase		X1 & X0 X2 & X0 X3 & X0

NOTE:
PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

KEY: DENOTES CONDUIT AREAS

ACME ELECTRIC

Type No.

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
75	DTFA-075-4S	230Δ	230Y/13	WS-A-	525	3ϕ	60Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	50 dB

Regulation @ 100%	3.167 %
Standards :	UL/CSA

Impedance	5.42 %

Typical Efficiency	97.83%
No Load Losses	372 W
Full Load Losses	2,674W

					A	PRINTS TO	CONTROL 7	A