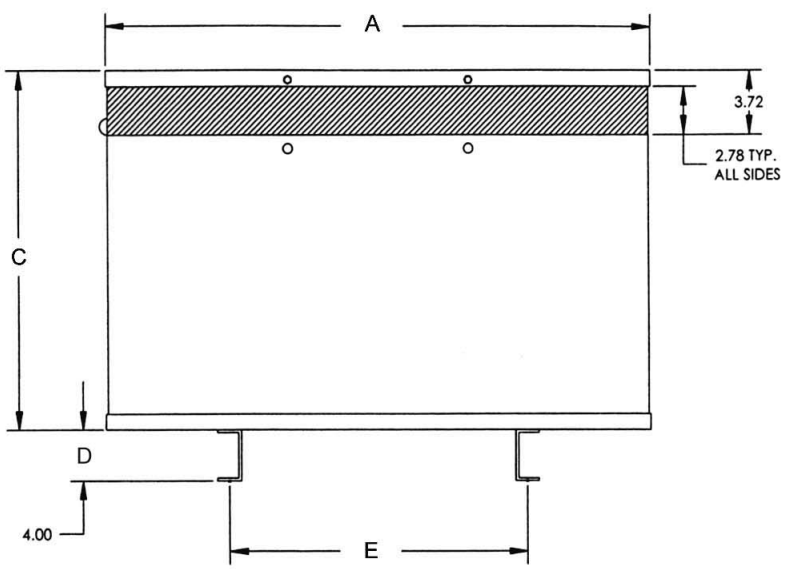

NOTES:
1. ▨ DENOTES CONDUIT AREA.

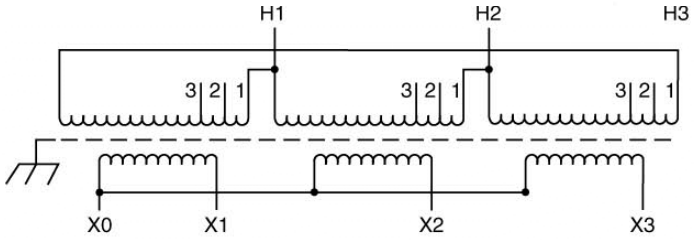

Primary Volts	%	Connect Leads to Tap No.
604	105	1
575	100	2
546	95	3
Secondary Volts		
460		X1, X2, X3
266 1 phase		X1 & X0 X2 & X0 X3 & X0

KVA	CATALOG NUMBER	VOLTAGE		Enclosure	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
11	DTHB-011-2S	575Δ	460Y/26	NEMA-3R	265	3ϕ	60 Hz

	A	B	C	D	E	F
(In.)	20.30	9.03	14.86	4.00	13.25	7.00

Temp Rise:	115° C	Windings:	AL	Insulation	180°C	

ACME ELECTRIC

CD SHEET

Type No.

DRAWN: ADR

DESIGN

CHK. | APP.

MAT'L

FINISH

SCALE | SHEET

					A	PRINTS TO	CONTROL 7	