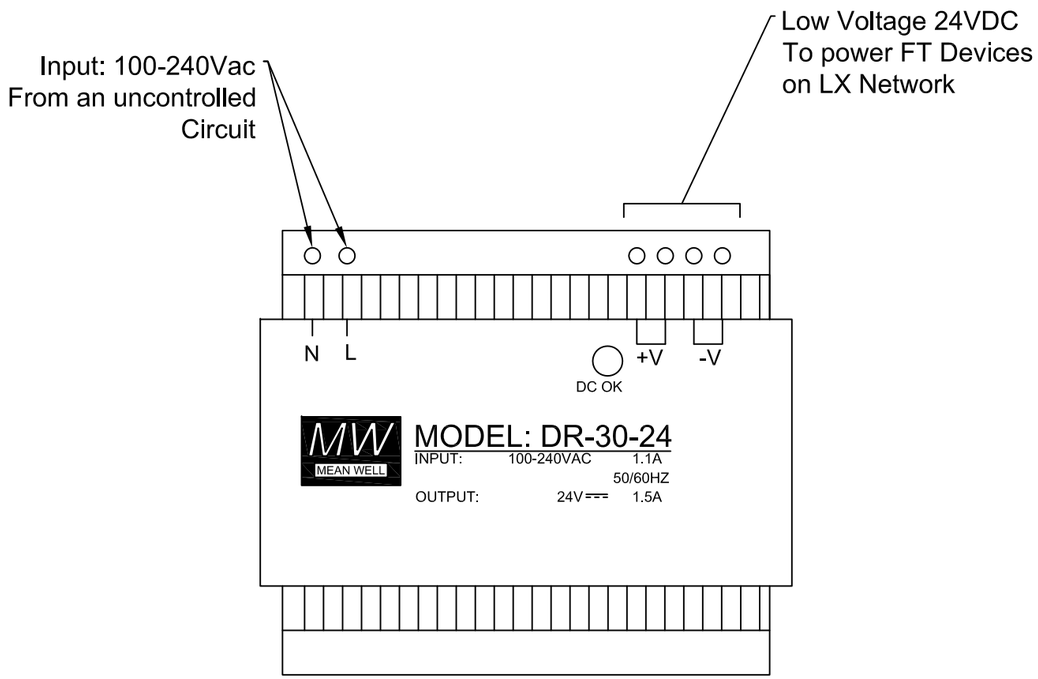

LXPWRSPLY
LX POWER SUPPLY

Specifications

AC input voltage range
- 120 VAC (100-240v), 50-60HZ
- Line and Neutral Single Phase only

Output
- 24V; 0-1.5A

Tolerance
- +/-1%

Efficiency
- 83%

DC adjustment range
- Rated output voltage: +/-10%

Overload protection
- 105%-160% constant current limiting; auto-recovery

Overvoltage protection
- Rated output voltage: 115%-135%

Setup; rise; hold-up time
- 100ms, 70ms, 100ms at full load and 132VAC

Withstand voltage
- I/P-O/P:3KVAC

Connection
- I/P:2 Poles
- O/P: 4 poles screw DIN terminal

Dimensions
- 3.0" x 3.5" x 2.5"

Operating Environment
- -4°-122°F (-20°-50°C) @100% load
- 140°F (60°C) @80% load

Certifications
- UL60950-1; TUV EN60950-1

EMC
- EN55022 class B; EN61,000-3-2,3; EN61,000-6-2; EN61,000-4-2,3,4,5,6,8,11; ENV50204; EN61204-3

Warranty
- Five-years limited

HUBBELL®
HUBBELL
Building Automation

(888) 698-3242
(512) 450-1100

9601 Dessau Rd. - Bldg 1
Austin, Tx 78745

LX FT Power Supply

THIS DOCUMENT AND SPECIFICATIONS DESCRIBED WITHIN ARE THE EXCLUSIVE PROPERTY OF HUBBELL BUILDING AUTOMATION ISSUED IN THE STRICTEST CONFIDENCE, AND SHALL NOT BE REPRODUCED, COPIED OR USED WITHOUT PRIOR WRITTEN PERMISSION.