

FEATURES

- Chicago Approved combination exit/emergency light
- Includes 2 each 5.3W adjustable white LED lamp-heads
- Housing made of durable 20 gauge steel with glass panels
- Wall, Ceiling or End mount
- Available with 6" tall, 3/4" stroke STAIRS or EXIT red lettered panels in single or double-face
- Chicago compliant 120 minute run-time
- Temperature Range: Standard: 20°C to 50°C
- UL924 Damp Location Listed



ORDERING INFORMATION

CLSC

MODEL

OF FACES

S Single
D Double

LETTER COLOR

R Red

HOUSING COLOR

W White

OPTIONS

RC Remote Capacity²
Blank No Remote Capacity

PANEL CODE

Single Face Models

- 3** "EXIT" (no arrows)
- 6** "EXIT" (right arrow)
- 9** "EXIT" (left arrow)
- 12** "EXIT" (double arrow)

- 2** "STAIRS" (no arrows)
- 5** "STAIRS" (right arrow)
- 8** "STAIRS" (left arrow)
- 11** "STAIRS" (double arrow)

Double Face Models

- 18** "EXIT" (no arrows)
- 21** "EXIT" (right / left arrow)
- 24** "EXIT" (double arrow)
- 17** "STAIRS" (no arrows)
- 20** "STAIRS" (right / left arrow)
- 23** "STAIRS" (double arrow)

1: The CLSC can be ordered fully configured as above, or by stocked model below.

2: Remote Capacity model has 10 watts remote capacity to run CRH (Indoor or Outdoor remote heads for Chicago)


STOCKED MODEL OPTIONS

CLSCSRW-3	Steel Combination Exit/Unit, No Arrows (CP#-ENA)
CLSCSRW-NP	Steel Combination Exit/Unit, No Panel Included
CLSCSRW-NPRC	Steel Combination Exit/Unit, No Panel Included

STOCKED PANEL OPTIONS

Catalog	Descriptions
CP3-ENA	Exit No Arrow
CP12-EDA	Exit Double Arrow
CP6-ERA	ExitRight Arrow
CP9-ELA	Exit Left Arrow
CP2-SNA	Stairs No Arrow
CP11-SDA	Stairs Double Arrow
CP5-SRA	Stairs Right Arrow
CP8-SLA	Stairs Left Arrow

DIMENSIONS

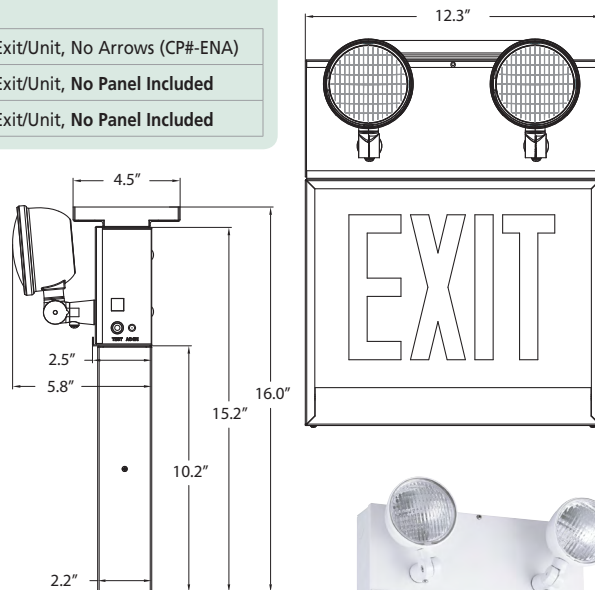

CLSCSRW-NP



CP2-SNA



CP3-ENA

Notes:

1. Order the -NP or -NPRC option for **single or double-face** and select the required panels separately.
2. When ordering double-face with -NP or -NPRC, ensure 2 panels are selected.
3. For -NP or -NPRC option in double-face with directional arrow, ensure a left and right arrow is selected.

Example: Order CLSCSRW-NP with CP6-ERA and CP9-ERA to make a double-face with both arrows pointing in one direction.