

Wall Switches and Digital Timer



WS2000W



WS1000NW



WS1020W



DT5030W



DT2000W

Passive Infrared Wall Switches

- Passive infrared technology
- Photozell (WS2000 series)
- No neutral required
- 1200 sq. ft. coverage
- Steel mounting strap
- Compatible with most LED and CFL
- CEC Title 24 and ASHRAE 90.1 compliant
- cULus

Description	Color	Standard	with Nightlight	with Neutral	with Nightlight and Neutral
Manual adjusting; selectable manual/auto ON operation; dual-voltage 120/277V AC; multi-way capable.	Gray	WS2000GY	WS2000NGY	—	—
	Ivory	WS2000I	WS2000NI	WS2004I	WS2004NI
	Light Almond	WS2000LA	WS2000NLA	—	—
	White	WS2000W	WS2000NW	WS2004W	WS2004NW
Manual adjusting; selectable manual/auto ON operation; 120V AC only.	Ivory	WS1000I	WS1000NI	—	—
	Light Almond	WS1000LA	WS1000NLA	—	—
	White	WS1000W	WS1000NW	—	—
Manual adjusting; manual ON operation; 120V AC only.	Ivory	WS1001I	WS1001NI	—	—
	Light Almond	WS1001LA	WS1001NLA	—	—
	White	WS1001W	WS1001NW	—	—
Manual adjusting; auto ON operation; dual circuit; 120V AC only.	Gray	WS1020GY	WS1020NGY	—	—
	Ivory	WS1020I	WS1020NI	WS1024I	WS1024NI
	Light Almond	WS1020LA	WS1020NLA	WS1024LA	WS1024NLA
	White	WS1020W	WS1020NW	WS1024W	WS1024NW
Manual adjusting; manual ON operation; dual circuit; 120V AC only.	Gray	WS1021GY	WS1021NGY	—	—
	Ivory	WS1021I	WS1021NI	WS1025I	WS1025NI
	Light Almond	WS1021LA	WS1021NLA	WS1025LA	WS1025NLA
	White	WS1021W	WS1021NW	WS1025W	WS1025NW

Note: See below for coverage patterns.

Count Down Timer Wall Switch

Description	Color	30 Minutes: OFF, 5, 10, 20, 30	60 Minutes: OFF, 15, 30, 45, 60	12 Hours: OFF, 2, 4, 8, 12
1000W @ 120V AC and 1400W @ 277V AC.	Ivory	DT5030I	DT5060I	DT5012I
	Light Almond	DT5030LA	DT5060LA	DT5012LA
	White	DT5030W	DT5060W	DT5012W

Note: Neutral required.


Digital Timer Wall Switch

Description	Color	120V AC	277V AC	Catalog Number
Dip switch enabled preset intervals. User adjustable 1 min up to 4 hours, 3-way capable. Includes an ON/OFF momentary push button switch feature.	White	960W	1200W	DT2000W

Note: Neutral required.

Wall Switches Coverage Patterns

Minor Motion: ■ PIR Major Motion: ■ PIR

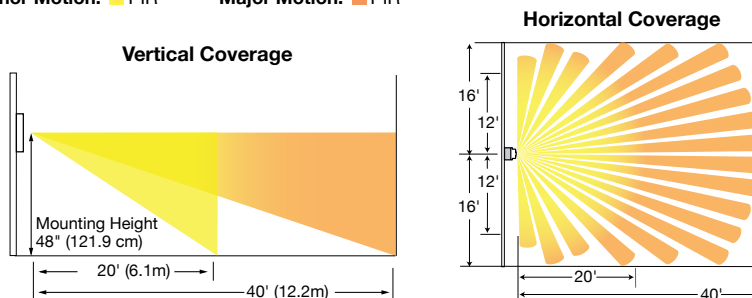

WS1000, WS2000 SERIES