

### FEATURES

- Opal Acrylic radial lens combines with curved shape for direct/indirect distribution
- Sturdy 20-gauge steel construction for excellent housing rigidity
- Lens will not dislodge from below
- Integrated daylight sensor options
- Nine lamping options
- Five distribution options
- Flat end caps standard (5/16"). Sculpted or Bull Nose optional
- Ability to separate uplight from downlight
- Modular mounting points for convenient hanging locations
- Patented die cast aluminum, tongue and groove couplers provide zero tolerance alignment resulting in consistently straight rows (Patent# 6,796,676B2)
- UL listed 1598, cUL or CSA, damp location listed



CURVES

### ORDERING INFORMATION

Alera Express 10-Day Shipment Selections

CVRL - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

MODEL	LAMP TYPE & PROFILE	MOUNTING METHOD	SUSPENSION LENGTH (CM)	VOLTAGE	FINISH	OPTIONS
CVRL Cûrv Radial Lens	<b>1T5</b> 1 T5 Lamp <sup>1</sup> <b>2T5</b> 2 T5 Lamps <sup>1</sup> <b>3T5</b> 3 T5 Lamps <sup>1</sup> <b>1T5HO</b> 1 T5HO Lamp <sup>1</sup> <b>2T5HO</b> 2 T5HO Lamps <sup>1</sup> <b>3T5HO</b> 3 T5HO Lamps <sup>1</sup> <b>1T8</b> 1 T8 Lamp <b>2T8</b> 2 T8 Lamps <b>3T8</b> 3 T8 Lamps	<b>FCM18</b> Fixed Aircraft Cable Mount (2-Lamp only) <b>CM</b> Adj. Aircraft Cable Mount <b>WM</b> Wall Mount	<b>48</b> 48" <b>96</b> 96" Other lengths available on request.	<b>U</b> 120V-277V <b>120</b> 120V <b>277</b> 277V <b>347</b> 347V	<b>MW</b> Matte White (Std.) <b>MB</b> Matte Black <b>ZT</b> ZET Metallic Silver	<b>DC</b> Dust Cover (T8 and T5 with standard distribution) <sup>2,6,8</sup> <b>SCE</b> Sculpted End Cap (55/16") <sup>8</sup> <b>BN</b> Bull Nose End Cap (51/16") <sup>8</sup> <b>LR</b> Left/Right Switching (2-Lamp only) <b>IBOB</b> Inboard/Outboard Switching (3-Lamp only) <b>EL</b> One Emergency Battery Pack <sup>3,4</sup> <b>EMC</b> One Emergency Circuit <sup>4,5</sup> <b>NLC</b> Night Light Circuit <sup>4,5</sup> <b>GLR</b> Fast Blow Fuse <b>GMF</b> Slow Blow Fuse <b>TBAR</b> T-Bar Mounting <b>DSPL</b> Philips LuxSense Daylight Sensor (Must Specify Philips Advance 0-10V Dimming Ballast) <sup>4</sup> <b>DSL</b> Lutron Daylight Sensor (Must Specify Lutron EcoSystem (EC5 Series) Dimming Ballast) <sup>4,7</sup>
ROW LENGTH	DISTRIBUTION	BALLAST				
<b>4</b> 4' Single <b>8</b> 8' Single — Indicate row length over 8' in 4' increments	<b>Blank</b> 60% Uplight, 40% Downlight <b>0/100</b> 0% Uplight, 100% Downlight <sup>2,6</sup> <b>20/80</b> 20% Uplight, 80% Downlight <sup>2,6</sup> <b>40/60</b> 40% Uplight, 60% Downlight <sup>2,6</sup> <b>85/15</b> 85% Uplight, 15% Downlight <sup>2,6</sup> <b>CLC</b> Center lamp cover A/V mode <sup>2,6</sup>	<b>E</b> Electronic, Instant Start (Std. for T8) <b>EP</b> Electronic, Programmed Start (Std. for T5 & T5HO, optional for T8) <b>ELW</b> Electroni T8, Low Wattage, Instant Start <b>EPLW</b> Electronic T8, Low Wattage, Programmed Start <b>ED</b> Electronic, Dimming (Must specify) <b>ESD</b> Electronic, Step Dimming <b>EDMK7</b> Electronic Dimming Philips Advance Mark 7 (0-10V) <b>ELUTES</b> Lutron EcoSystem Digital Dimming Ballast <sup>4,7</sup>				


Note: Rows over 8' will be configured by Alera. Example: 16' will be (2) 8'. Alternate configurations: contact factory.

<sup>1</sup> T5/T5HO at risk for socket shadow in downlight component.  
<sup>2</sup> Dust cover not available when using these optical distribution covers.  
<sup>3</sup> Specify voltage. For additional, specify quantity before nomenclature (Example: 2EL120).  
<sup>4</sup> Not available with all configurations; some limitations apply. Contact factory for details.  
<sup>5</sup> One extra feed drop per EMC/NLC. (For through wiring, contact factory).


<sup>6</sup> Optional distribution covers provide approximate patterns. Distribution pattern results vary according to specific lamp configurations. Contact factory for additional information.  
<sup>7</sup> Lutron EcoSystem® series ballast. Contact factory for other Lutron ballasts.  
<sup>8</sup> Ships separately.

Unless specified, Alera will use fewest ballasts possible.

### MOUNTING INFORMATION

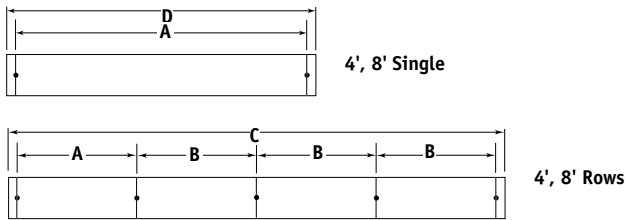

### CROSS SECTIONS

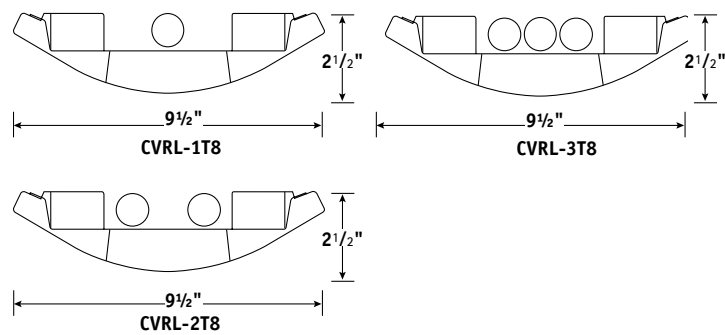

### DATA CHART

NOMINAL LENGTH	APPROX. WEIGHT (LBS.)			A	B	C	D
	1-LAMP	2-LAMP	3-LAMP				
4'	14.8	17.1	19.4	47 1/4"	48"	192 5/8"	48 5/8"
8'	26.3	28.6	30.9	95 1/4"	96"	384 5/8"	96 5/8"

Note: Suspension data is computed using the standard aircraft cable assembly. The use of rigid stems will yield different data. Please consult factory for stem data. Dimensions include standard flat end caps.

Name:	CVRL-2T5-EP
Test #:	ITL72475
Efficiency:	91.4%
LER:	77

