


CV WM

Cûrv Wall Mount

ALERA
LIGHTING
EXPRESS

CÛRV WALL MOUNT

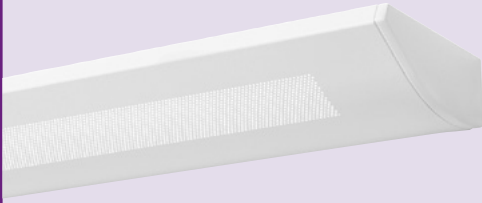

Shown with PERF housing.

FEATURES


- Constructed of heavy 20-gauge steel
- Popular curved wall mount profile in solid or perforated housing
- 2½" x 6¼" profile maintains a sleek aesthetic
- Companion fixture to Cûrv series indirect or semi-indirect suspended luminaires
- T8, T5, or T5HO lamps
- One or two lamps in cross section
- Flat end caps standard
- Installs easily using the universal wall mounting system (Wall bracket painted std. matte white unless otherwise specified)
- May also be used as an indirect or semi-indirect companion to curVista and Cûrv Louvered suspended direct/indirect offerings
- Patented die cast aluminum connection plates and end caps to ensure row integrity (Patent# 6,796,676B2)
- UL listed 1598, cUL or CSA, damp location listed

ORDERING INFORMATION


CV	-	-	-	WM	-	-	-	-
MODEL				MOUNTING METHOD				
CV Cûrv				WM Wall Mount				
		HOUSING TYPE				VOLTAGE	FINISH	OPTIONS
		PERF Perforated S Solid				U 120V -277V 120 120V 277 277V 347 347V	MW Matte White (Std.) ZT ZET Metallic Silver	HRF High Efficiency Reflector DC Dust Cover (Not available w/ T5HO) ⁴ SCE Sculpted Cûrv End Cap (5½") ⁴ BN Bull Nose End Cap (5½") ⁴ LR Left/Right Switching (2-Lamp only) EL One Emergency Battery Pack ^{1, 2} F0841 With T8 4100K Lamp Installed F5841 With T5/T5HO 4100K Lamp Installed F0835 With T8 3500K Lamp Installed F5835 With T5/T5HO 3500K Lamp Installed EMC One Emergency Circuit ^{2, 3} NLC Night Light Circuit ^{2, 3}
ROW LENGTH		LAMP TYPE & PROFILE		BALLAST				
4 4' Single 8 8' Single — Indicate row length over 8' in 4' increments		1T5 1 T5 Lamp 2T5 2 T5 Lamps 1T5HO 1 T5HO Lamp 2T5HO 2 T5HO Lamps 1T8 1 T8 Lamp 2T8 2 T8 Lamps		E Electronic, Instant Start (Std. for T8) EP Electronic, Programmed Start (Std. for T5 & T5HO, optional for T8) ED Electronic, Dimming (Must specify) ESD Electronic, Step Dimming				
Note: Rows over 8' will be configured by Alera. Example: 16' will be (2) 8'. Alternate configurations: contact factory.				Unless specified, Alera will use fewest ballasts possible.				

¹ Specify voltage. For additional, specify quantity before nomenclature (Example: 2EL120).
² Not available with all configurations; some limitations apply. Contact factory for details.
³ One extra feed drop per row. (Standard is one 4ft lamp per circuit.)
⁴ Ships separately

CROSS SECTIONS

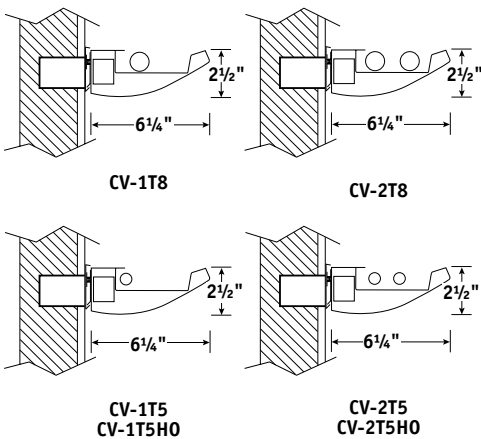

MOUNTING INFORMATION

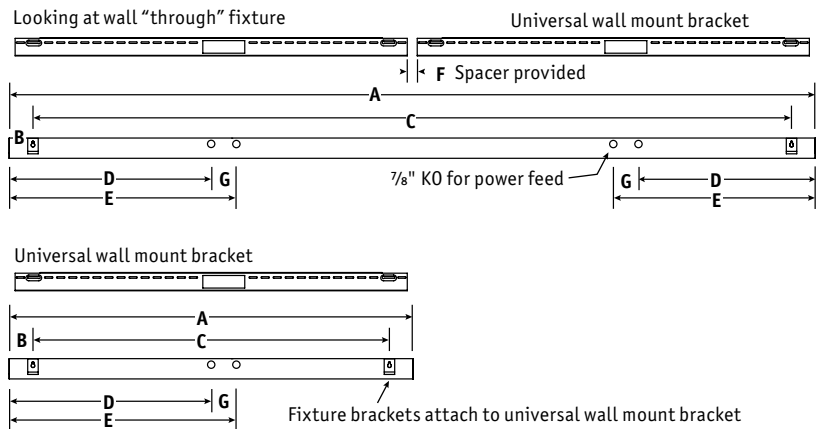

DATA CHART

NOMINAL LENGTH	APPROX. WEIGHT (LBS.)	A*	B	C	D	E	F	G
4'	8	48½"	2½"	42½"	24½"	27½"	19½"	3"
8'	16	96½"	2½"	90½"	24½"	27½"	19½"	3"

*Note: Fixtures mounted in rows require two mounting locations per fixture. SCE end caps add 10⅝". BN adds 10⅝". Standard flat end caps add ⅝" to overall row length.

Name:	CV-2T8-PERF-WM-E
Test #:	13184
Efficiency:	85.3%
LER:	73

Definitions on page 182.

