

**IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.** Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition.

## INSTALLATION INSTRUCTIONS ARCHITRAK® SYSTEM

### INSTALLATION INSTRUCTIONS

FOR AKTPA TRACK PENDANT ADAPTOR

FOR USE WITH PRESCOLITE AKT ONE/TWO CIRCUIT TRACK SYSTEM ONLY.


READ INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE TRACK SYSTEM

SAVE INSTRUCTIONS FOR REFERENCE WHEN MAKING ADDITIONS TO OR CHANGES IN THE TRACK SYSTEM.

### INSTALLATION

**CAUTION: MAXIMUM FIXTURE WEIGHT 20LBS.**

1. Refer to PRESCOLITE AKT series track for track installation instructions
2. Remove bottom plate by removing two flat head screws. Pull out black, white, and green ground wire.
3. Attach pendant mounted fixture to pendant retaining ring by chain or other suitable means. Refer to instructions provided with fixture assembly. **WARNING: DO NOT SUSPEND FIXTURE BY POWER SUPPLY CORD. UNLESS APPROVED AS CORD SUSPENDED FIXTURE. WIRE FIXTURE ASSEMBLY TO PENDANT ADAPTOR WITH WIRING INSTRUCTIONS PROVIDED WITH FIXTURE ASSEMBLY.**
4. Push all wiring into pendant adaptor body. Replace bottom plate with two flat head screws.
5. Lift fixture assembly with pendant adaptor to track rail. Insert contact head of pendant adaptor into track rail. Twist 1/4 turn (90 degrees) until locking lever snaps into track rail. Gently let fixture down until supported by approved suspension means.
6. To remove pendant from track rail. Gently pull down locking lever. Twist 1/4 turn (90 degrees) remove from track.

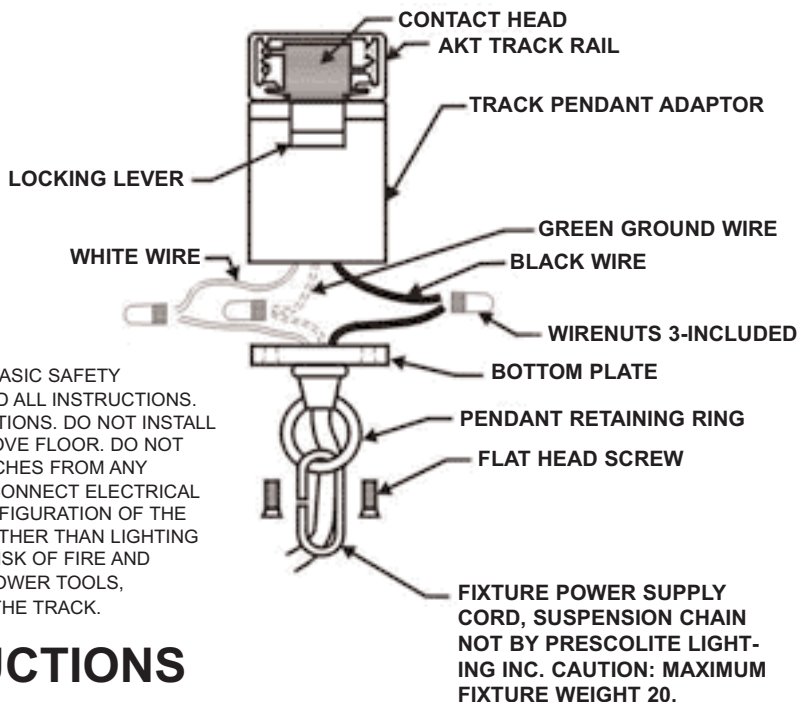

### WARNING:

WHEN INSTALLING OR USING THIS TRACK SYSTEM, BASIC SAFETY PRECAUTIONS SHOULD ALWAYS BE FOLLOWED. READ ALL INSTRUCTIONS. DO NOT INSTALL THIS TRACK IN DAMP OR WET LOCATIONS. DO NOT INSTALL ANY PART OF TRACK SYSTEM LESS THAN 5 FEET ABOVE FLOOR. DO NOT INSTALL ANY FIXTURE ASSEMBLY CLOSER THAN 6 INCHES FROM ANY CURTAIN, OR SIMILAR COMBUSTIBLE MATERIAL. DISCONNECT ELECTRICAL POWER BEFORE ADDING TO OR CHANGING THE CONFIGURATION OF THE TRACK. DO NOT ATTEMPT TO ENERGIZE ANYTHING OTHER THAN LIGHTING TRACK FIXTURES ON THE TRACK. TO REDUCE THE RISK OF FIRE AND ELECTRIC SHOCK, DO NOT ATTEMPT TO CONNECT POWER TOOLS, EXTENSION CORDS, APPLIANCES, AND THE LIKE TO THE TRACK.

**SAVE THESE INSTRUCTIONS**



® 101 Corporate Drive • Spartanburg, SC 29303  
With representatives offices in principal cities throughout North America.  
Copyright 2005, 08/05 revision, All Rights Reserved - Printed in U.S.A.