



Kim WARP9™ Horizontal Slipfitter Installation Instructions




WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code. Failure to do so may result in serious personal injury.


NOTE: All wiring must be done by a qualified electrician. KEEP THIS SHEET FOR FUTURE REFERENCE.

Tools Required: □ 3/16" Allen Wrench □ 1/4" Allen Wrench

INSTALLATION INSTRUCTIONS: Make certain electrical supply is **OFF** before starting fixture.

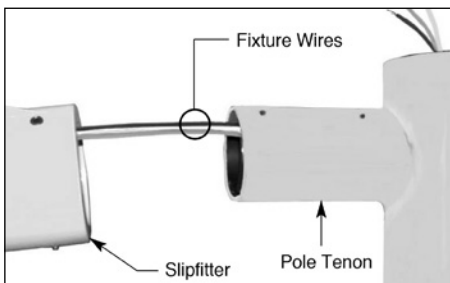


1. Pull field wires through the pole tenon and slipfitter into the housing. Carefully slide the slipfitter over the tenon, making sure wires are not pinched.

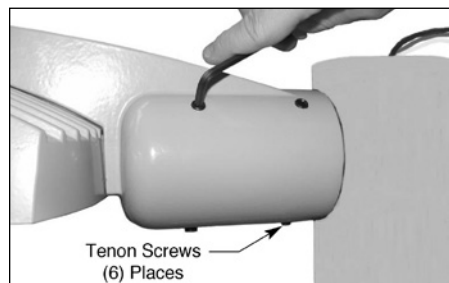


2. Adjust fixture to desired angle with tenon using (6) tenon screws and tighten progressively, making sure fixture is level.



3. Remove slipfitter set screws, drill 3/16" diameter recess in tenon for screw point and replace screws.

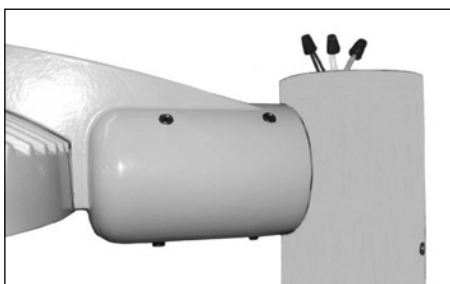

4. Attach fixture wires to field wires, i.e.; green-to-ground, white-to-common, and black-to-voltage. See Warp9 Installation Instructions for lamp and ballast installation.

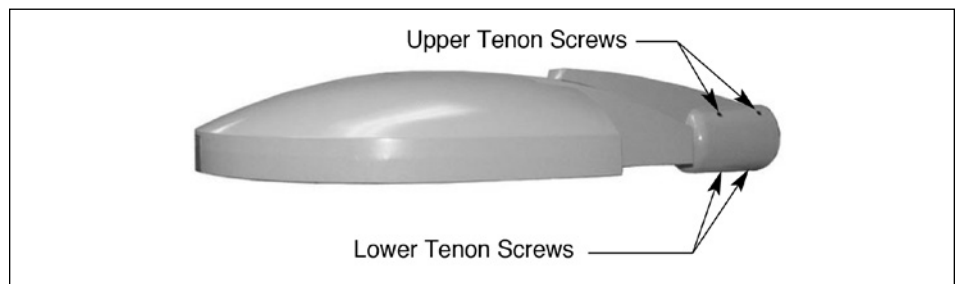

Post Installation Adjustment Instructions:

To Raise Fixture: Loosen lower tenon screws several turns and tighten upper tenon screw progressively until fixture is at correct angle. Tighten lower tenon screws (10 foot-lbs) to secure.

To Lower Fixture: Loosen upper tenon screws progressively until fixture is at correct angle. Tighten lower tenon screws (10 foot-lbs.) to secure.

For warranty see <http://www.hubbellighting.com/resources/warranty>