



KN - WF20 Voltage Conversion Instructions

<u>/!\</u>

WARNING: Fixtures must be grounded in accordance with local codes or the National Electrical Code.

1 Failure to do so may result in serious personal injury

CAUTION: Use only the lamp type and wattage shown on the fixture label on the electrical assembly. The fixture label must indicate the same electrical data as the ballast label.


KEEP THIS SHEET FOR FUTURE REFERENCE.

Tools Required:	☐ ½" Allen Wrench	Phillips Screw Driver
-----------------	-------------------	-----------------------

Make certain electrical supply is **OFF** before starting conversion.

With the fixture installed as per the Wall Forms Installation Instructions, the following instructions are for 120 volt conversion:

- 1. Disconnect input connection (from 277v), quick connect (see figure 1).
- 2. Connect incoming voltage to 120v male connection (see figure 2).
- 3. Connect both 277V connections together (see figure 2).
- 4. Replace reflector, lamp & lens cage.

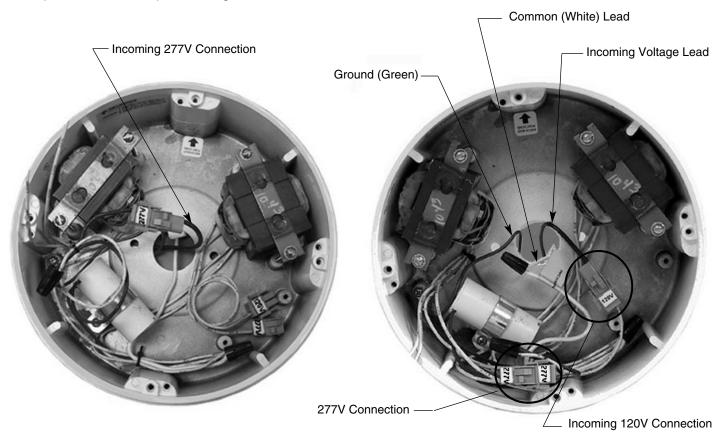

Pre-Wired 277 Voltage Figure 1

Wiring For 120 Voltage Input Figure 2

Revision 7/16/10 ECN 100715008 Status 4 Part No. 95646

KN - WF20 Voltage Conversion Installation Instructions

KIM LIGHTING LIMITED WARRANTY

When installed in accordance with Kim Installation Instructions and accepted trade practices, the following shall apply:

General Product Limited Warranty Coverage

All material and component parts used in the manufacture of Kim Products, are warranted to be free from defects of material and/or workmanship for a period of 1 year from date of sale, with the following exceptions:

Auxiliary Equipment

All auxiliary equipment (such as lamps, ballasts, and transformers) provided by and/or included in Kim Products shall carry the component manufacturer's warranty.

Copper and Bronze Landscape Components

Copper and Bronze Landscape fixture components shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 7 years from date of sale.

Composite In-Grade Components

Composite In-Grade fixture components installed below grade, shall be warranted against defects of material and/or workmanship, and failure due to corrosion, for a period of 7 years from date of sale.

Aluminum Landscape Components

Aluminum Landscape fixture components not in direct contact with soil, shall be warranted against defects of material and/or workmanship for a period of 3 years from date of sale. Aluminum fixture components in direct contact with soil shall be warranted from defects of material and failure from corrosion for a period of 1 year from date of sale.

Limit of Liability and General Conditions

Only products which are installed, used and maintained in accordance with applicable Kim instructions, specifications, and accepted trade practices, are covered by the Kim Warranty. During the warranty period, with proof of purchase, Kim will repair or replace with the same or similar product, at Kim's option, without charge. Labor costs are the owner's responsibility and are excluded from this warranty. This warranty is void if the product is modified, tampered with, misapplied, poorly installed, improperly maintained, or subjected to abnormal conditions.

Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This warranty is in lieu of all other warranties, expressed or implied, including any implied warranty of fitness for a particular application. Kim Lighting shall not be liable to the purchaser for indirect or consequential damages.

KIM LIGHTING