

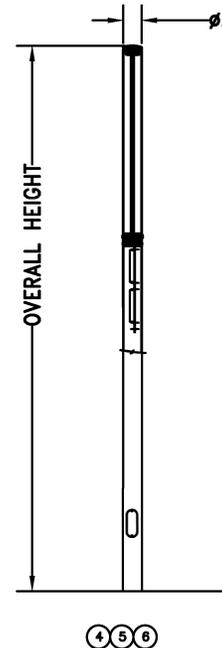
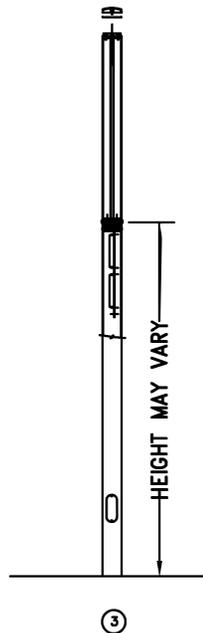


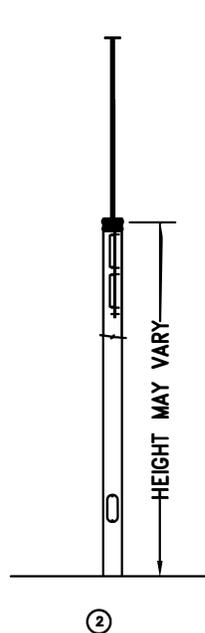

DIRECT BURIAL LC5 BOLLARD INSTALLATION INSTRUCTIONS

**ELECTRICAL INSTALLATION SHALL BE DONE BY A LICENSED ELECTRICIAN.
INSTALLATION SHALL BE IN COMPLIANCE WITH THE N.E.C. AND ALL
LOCAL ORDINANCES**

VERIFY THAT POWER IS TURNED OFF DURING
INSTALLATION

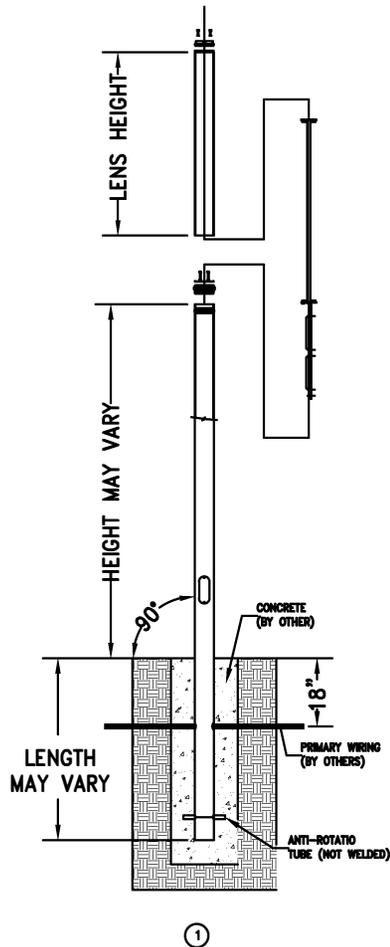

1. INSERT ANTIROTATION TUBE THROUGH HOLE AT BOTTOM END OF THE SHAFT AND RUN CONDUIT THROUGH SHAFT SIDE OPENINGS, UP TO 6" BELOW THE HAND HOLE CENTER. SET THE SHAFT VERTICAL AND POOR THE CONCRETE FOOTING. (CONCRETE AND PRIMARY WIRING BY OTHERS)
2. AFTER CONCRETE HAS CURED, INSTALL THE ELECTRICAL GEAR ASSEMBLY, AND SECURE TO THE RING INSIDE THE TOP END OF THE SHAFT, USING THE HARWARE PROVIDED.
3. INSTALL GAKETING AND LENS, AND RETAIN THE LENS WITH THE CAST RING PROVIDED. THE RING IS ATTACHED TO THE ELECTRICAL GEAR ASSEMBLY TOP PLATE WITH (2) #10-24 SCREWS PROVIDED.
4. INSTALL GASKETING AND CAST ALUMINUM CAP. THE CAP HAS A SCREW CEMENTED INSIDE, WHICH WILL ENGAGE WITH THE THREADS IN THE CENTER HUB OF THE RING RETAINING THE LENS. WHEN THE ASSEMBLY OPERATION IS FINISHED, THE ONLY VISIBLE HARDWARE SHALL BE AT THE HAND HOLE COVER.
5. REMOVE THE HAND HOLE COVER AND SPLICE HARNESS LEADS TO POWER LEADS.
6. TURN POWER ON AND CHECK INSTALLATION.

DWG. No. INST. INSTRUCTIONS/II-LC5-DBE-01

DRAWN BY: SNG DATE: 04/06/18

APPROVED BY: _____