

INSTALLATION INSTRUCTION MANUAL

15W LED FLOOD LIGHT, 100-277VAC

9F-9G:

FÍ Y ÁŠUŮŠŮP V

AcXY`bi a Vyf`dUfUa Yhf`jgh

Q{ Á	T[á^	Q]` dX cæ ^	Ú[, ^!Á Qæq; !Á	Y æc	Q]` c Ô` !!^} c
QÁ	FÍ Y ÁŠUŮŠŮP VÁ	1 cæ i XŮ	` cæ	FÍ Y	cæ i cæ



%` bfcXi Wicb

- This LED Flood light uses the latest in solid state lighting technology for long life, low maintenance, and high efficiency.
- Can be used from any nominal input voltage supply from 100-277V, 60Hz AC.
- Suitable for wet locations

Note: Save these instructions for future reference.

&" bghU`"; i |XY|bYg

Warning:

To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

Warning:

To avoid electric shock:

- Be certain electrical power is OFF before and during installation and maintenance.
- Luminaire must be connected to a wiring system with an equipment-grounding conductor.

Warning:


To avoid explosion:

- Make sure the supply voltage is the same as the rated luminaire voltage.
- Do not operate in ambient temperatures above those indicated on the luminaire nameplate.
- Keep lens tightly closed when in operation.

For supply connections use wire rated for at least 90°C

Installation Steps:

Knuckle mounting

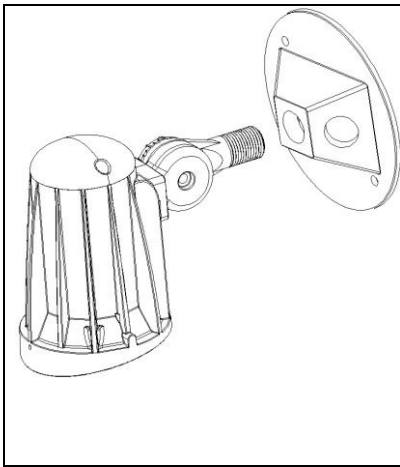

Secure service wire or conduit to the wiring compartment cover with 1/2" connector (not provided). Connect the white fixture wire to white supply wire, and the black fixture wire to black supply wire. Service ground should be attached to green ground screw. Ground must be properly attached to avoid the risk of electrical shock. Use wire nuts, crimp-on lugs, or other approved devices to connect all wires, and make sure connections are secure. Secure wiring compartment cover to fixture. Use UL and CUL listed flexible steel waterproof conduit in trade sizes 1/2 and UL and CUL listed water-proof outlet boxes.

After installation:

- Check whether the lighting fixture is firmly fixed.
- Check whether wires are connected correctly.
- Turn on the power, and check if the lighting fixture works well. If not, please turn off the power and contact with your product seller.