

## WARNINGS

**WARNING!** Fixtures must be grounded and installed in accordance with the National Electrical Code and all local codes.

Failure to do so may increase the RISK OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH. Install and use where burnouts do not cause a hazard and use only in environments for which the product is specifically marked.

**WARNING!** This product contains chemicals known to the State of California to cause cancer, birth defects, and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

**WARNING!** Open circuit before removing cover.  
Keep assembly tightly closed when in operation.

**CAUTION!** Follow ALL luminaire recommendations, product markings, instructions, restrictions and warnings regarding luminaire operation and burning position.  
Luminaire label shows electrical and environmental requirements.

All electrical work must be done by a qualified electrician.

Turn off electric power to all affected circuits and allow to cool before servicing. A regularly scheduled maintenance program should be established to retain optimum light output and reduce heat retention. Dusting with a soft, clean, dry cloth is normally sufficient.

Any accumulation of dust or dirt should be removed regularly from the lens.


Use only a mild soapy solution, DO NOT use alkaline or acid cleaners.

Carefully read these instructions before installing product. If you do not understand these instructions, before starting any work, contact your Hubbell Lighting distributor or [techsupport@hubbell-ltg.com](mailto:techsupport@hubbell-ltg.com) or (864) 678-1000.

Please read thoroughly before installing.

Give instructions to facility owner/manager for future reference.

1. Assemble the desired mount (A) to facility junction box, hard mount, or conduit matching your ordered fixture configuration.
  2. Wire connections from supply to driver (B), including ground (C) point in top mounting (A), heatsink (D), J-Box Cover (WM/CM only)
  3. Install main fixture housing/light engine (D).
- Note: Ensure all gaskets are in place!
4. Install Lens (E) into Light Engine body inner threads (F)
  5. Install Wireguard (G) over Lens (E) and onto Light Engine body outer threads (H).

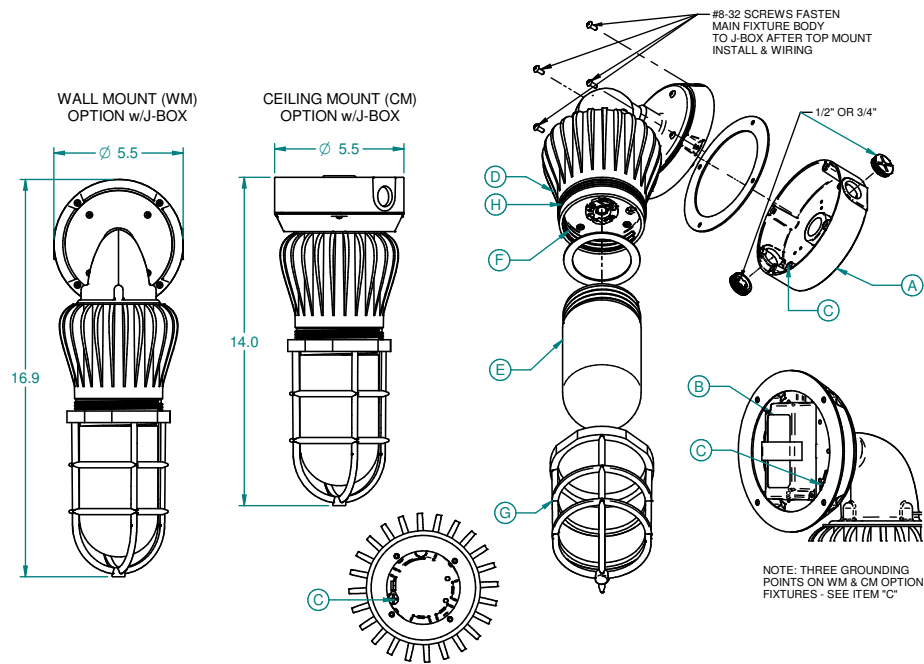

Please read thoroughly before installing.

Give instructions to facility owner/manager for future reference.

1. Assemble the desired mount (A) to facility junction box, hard mount, or conduit matching your ordered fixture configuration.
  2. Wire connections from supply to driver (B), including ground (C) point in top mounting (A), heatsink (D), J-Box Cover (WM/CM only)
  3. Install main fixture housing/light engine (D).
- Note: Ensure all gaskets are in place!
4. Install Lens (E) into Light Engine body inner threads (F)
  5. Install Wireguard (G) over Lens (E) and onto Light Engine body outer threads (H).

